

US 20230250671A1

(19) **United States**  
(12) **Patent Application Publication**  
AMSELLEM et al.

(10) **Pub. No.: US 2023/0250671 A1**  
(43) **Pub. Date: Aug. 10, 2023**

(54) **ALUMINUM FENCE SYSTEM**  
(71) Applicant: **Alumission Inc.**, Oxnard, CA (US)  
(72) Inventors: **ITSIK AMSELLEM**, Ventura, CA (US); **BEN SASSON**, Fillmore, CA (US); **ZACH SASSON**, Fillmore, CA (US)  
(21) Appl. No.: **17/898,315**  
(22) Filed: **Aug. 29, 2022**

**Related U.S. Application Data**

(60) Provisional application No. 63/296,126, filed on Jan. 3, 2022.


**Publication Classification**


(51) **Int. Cl.**  
*E04H 17/20* (2006.01)  
*E04H 17/16* (2006.01)

(52) **U.S. Cl.**  
CPC ..... *E04H 17/20* (2013.01);  
*E04H 17/16* (2013.01)


(57) **ABSTRACT**

The fence system attaches to an aluminum or steel rectangular base post in concrete or the ground. The inside wall of a fence column slides over the base post. The fence column also has an outside wall around the inside wall. Each of three side of the fence column has an elongated slot, which receives one end of a slat. A bracket may secure the slat to the fence column. The fence system also has a gate of the same style as the rest of the fence. A lockset housing replaces one fence column. It receives slats on one side, and the lockset's latch projects from the other side. A hollow post has a slot facing the latch when the gate is closed. A latch cover is held by the slot, and an extension of the latch cover extends along the lockset housing to block surreptitious opening the gate.

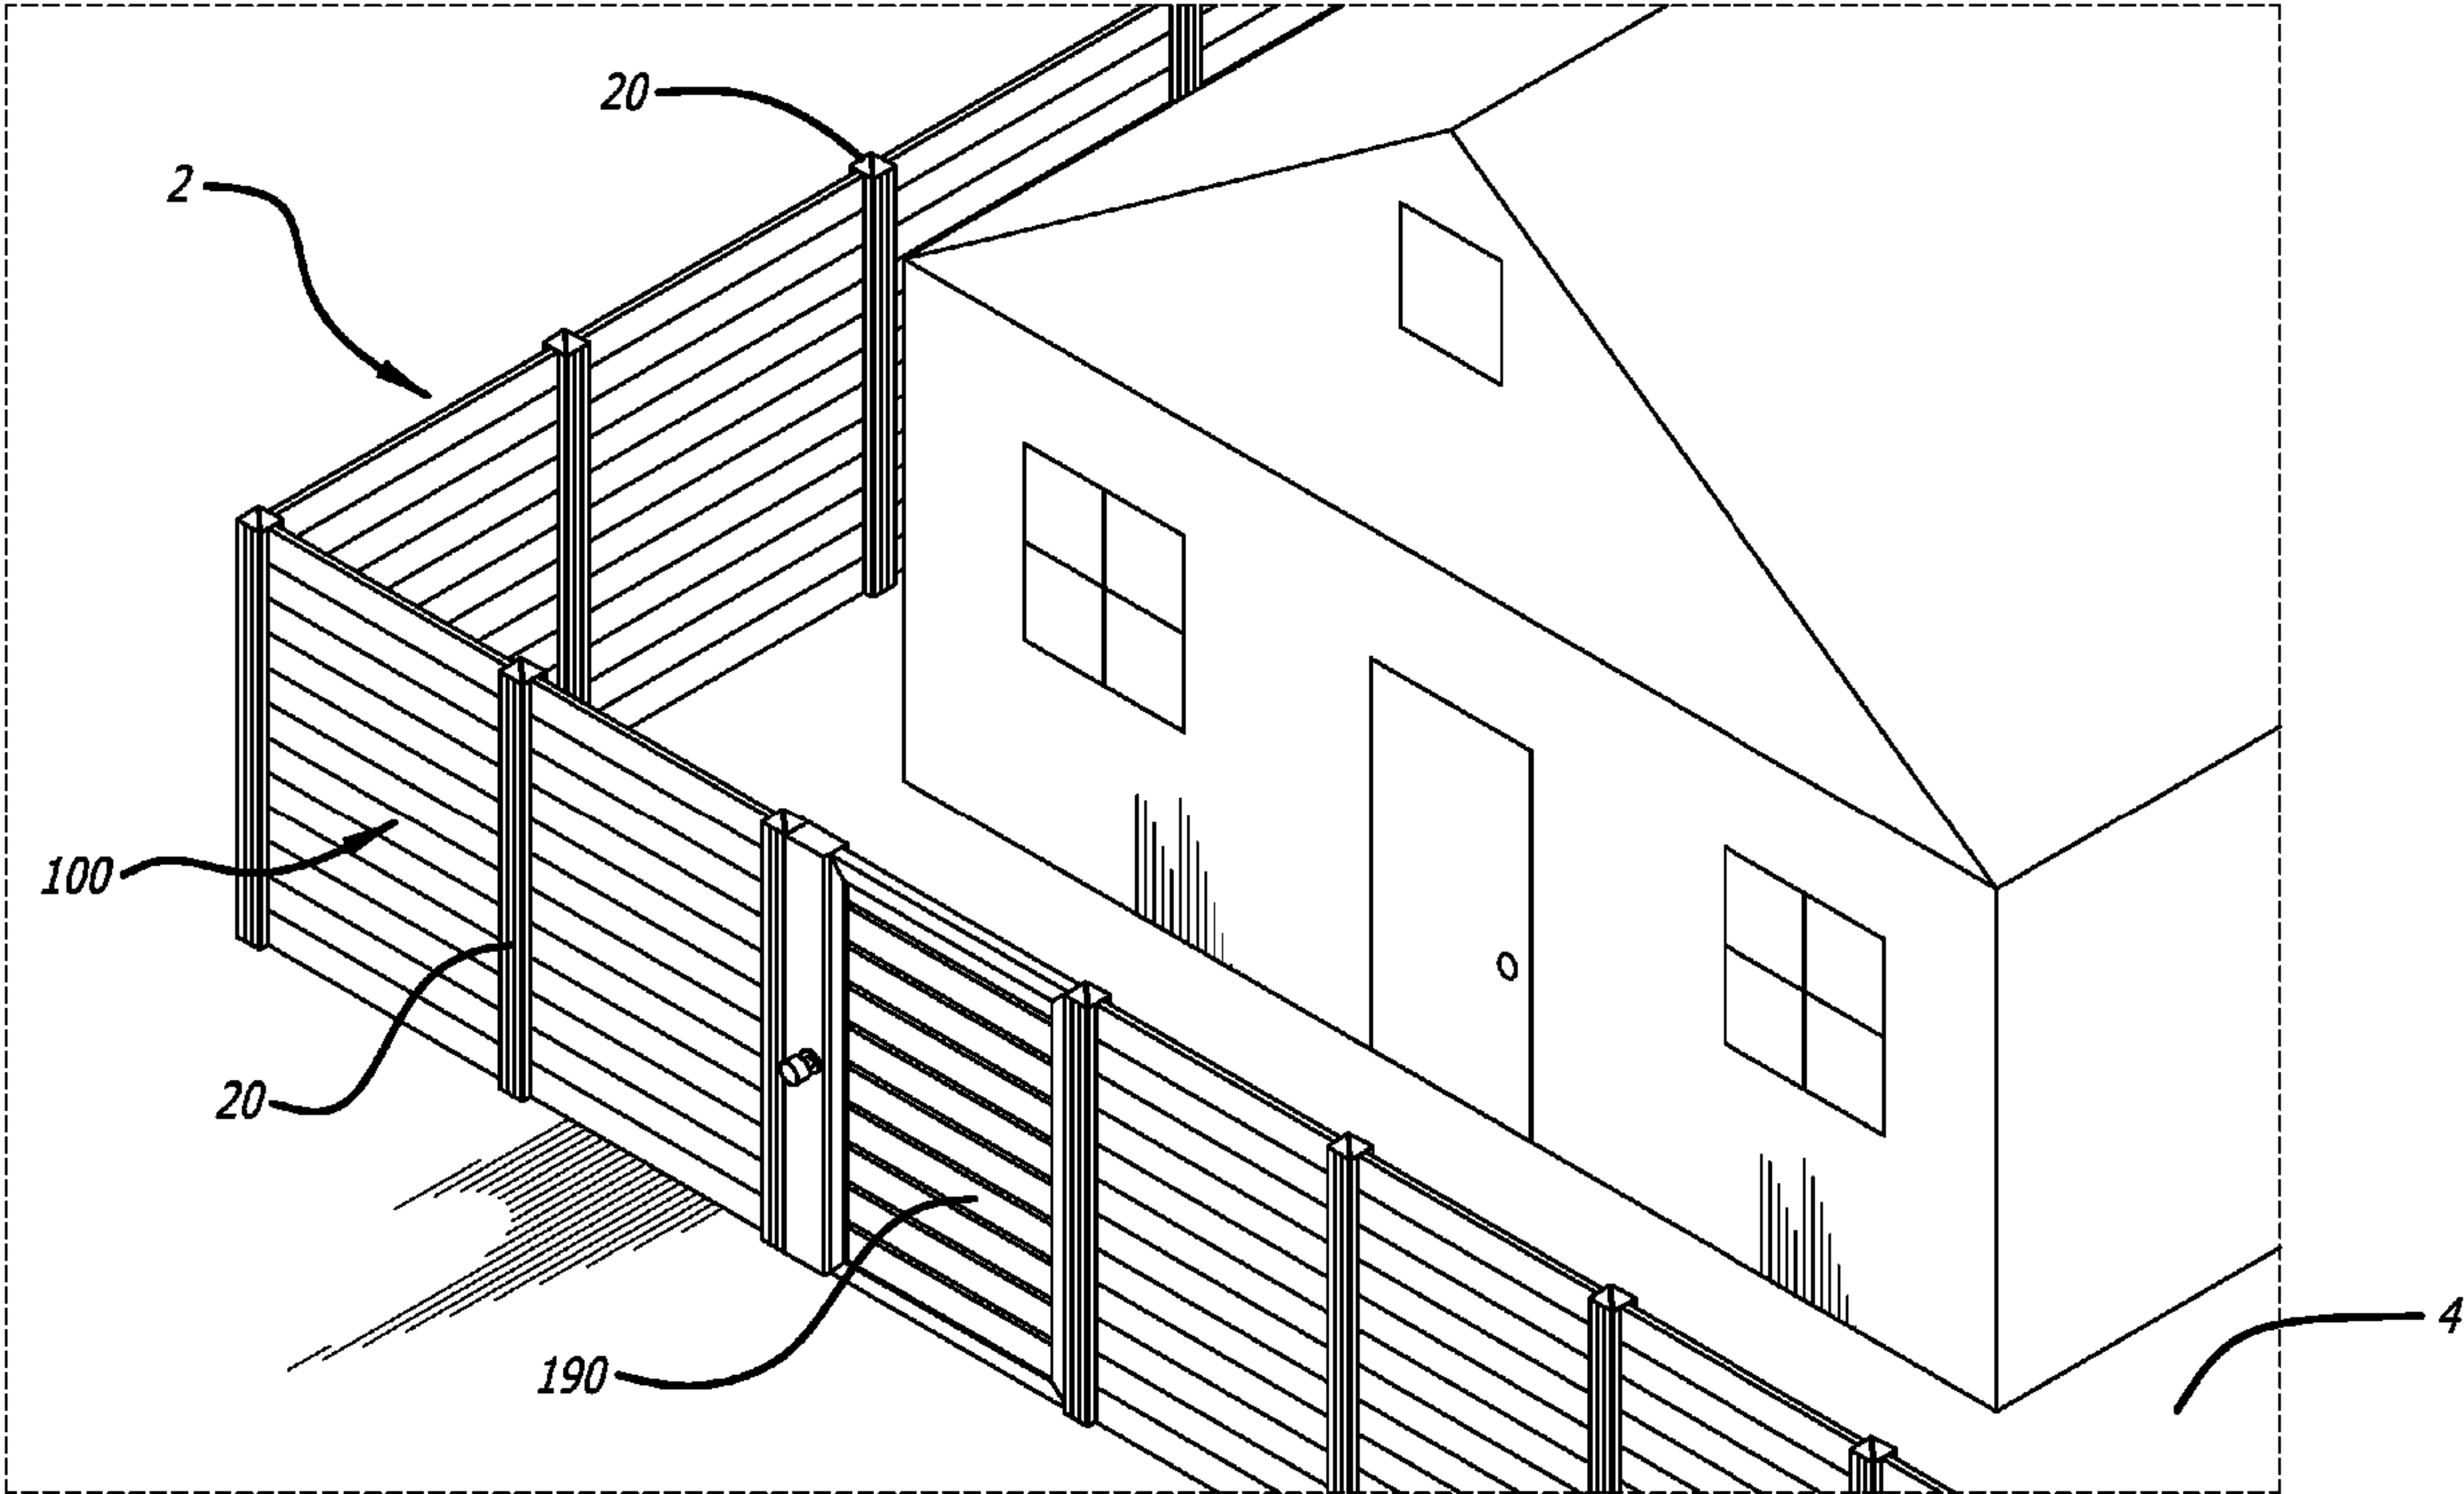

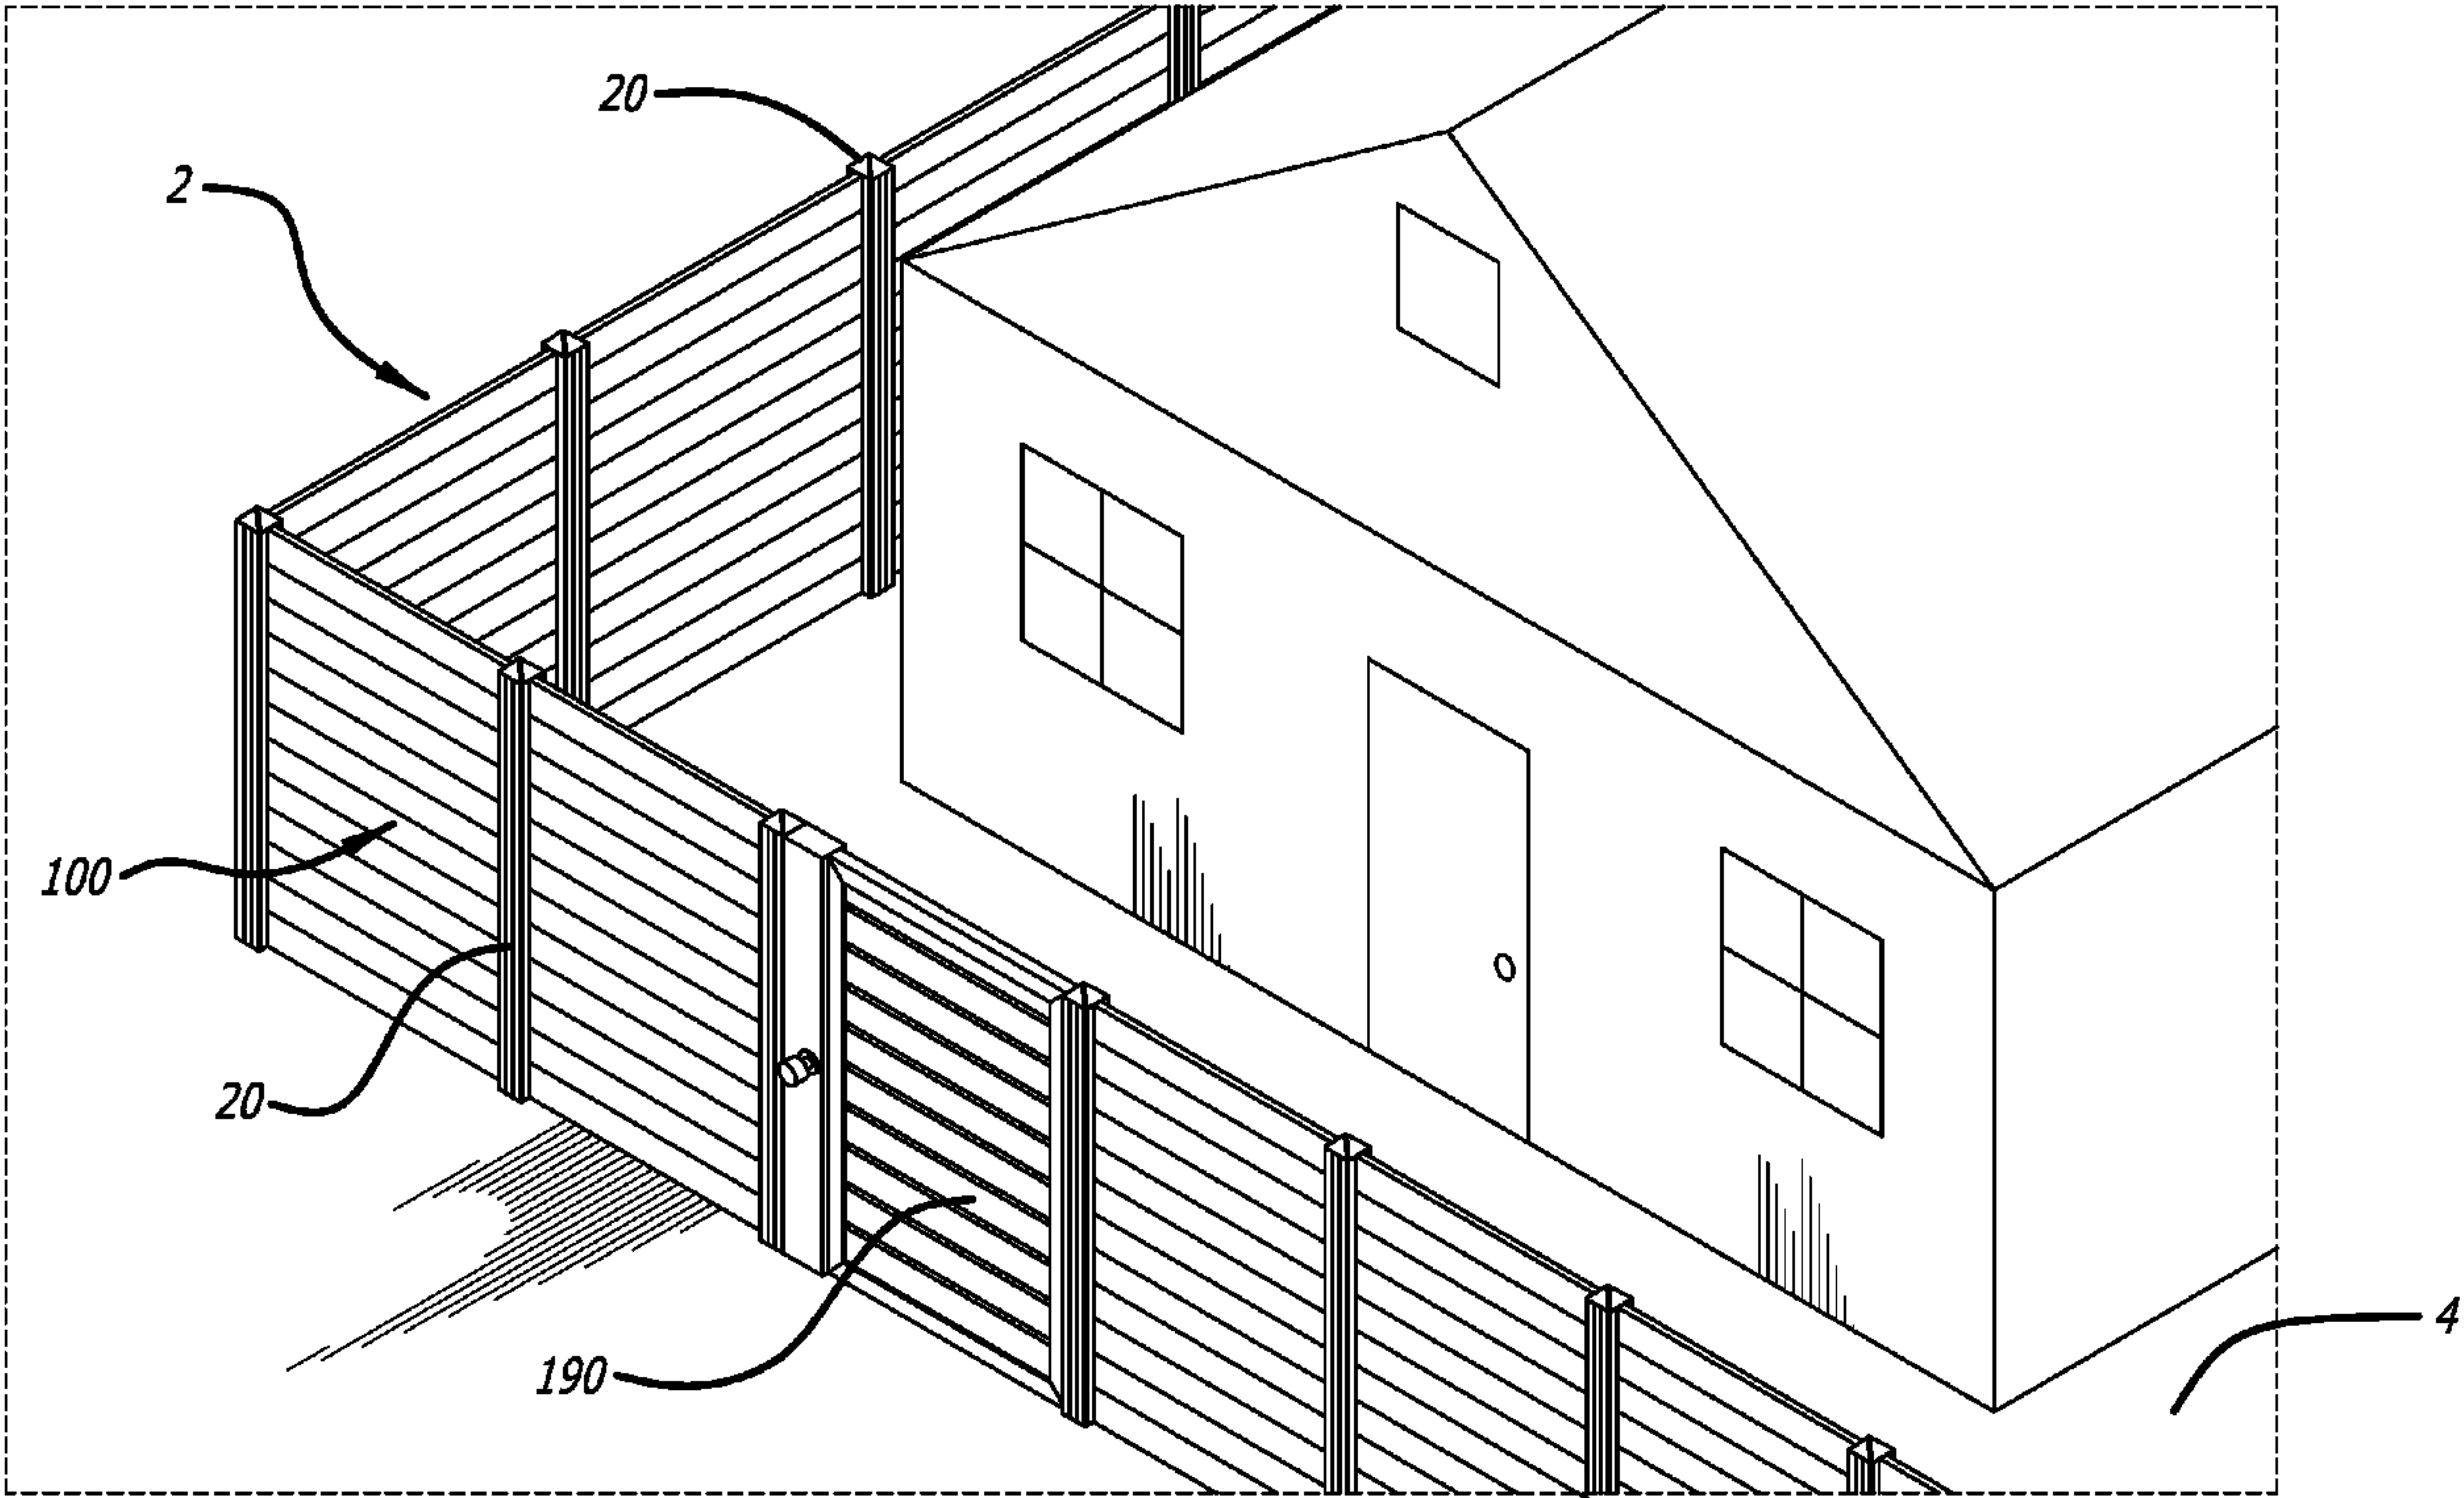

*FIG. 1*

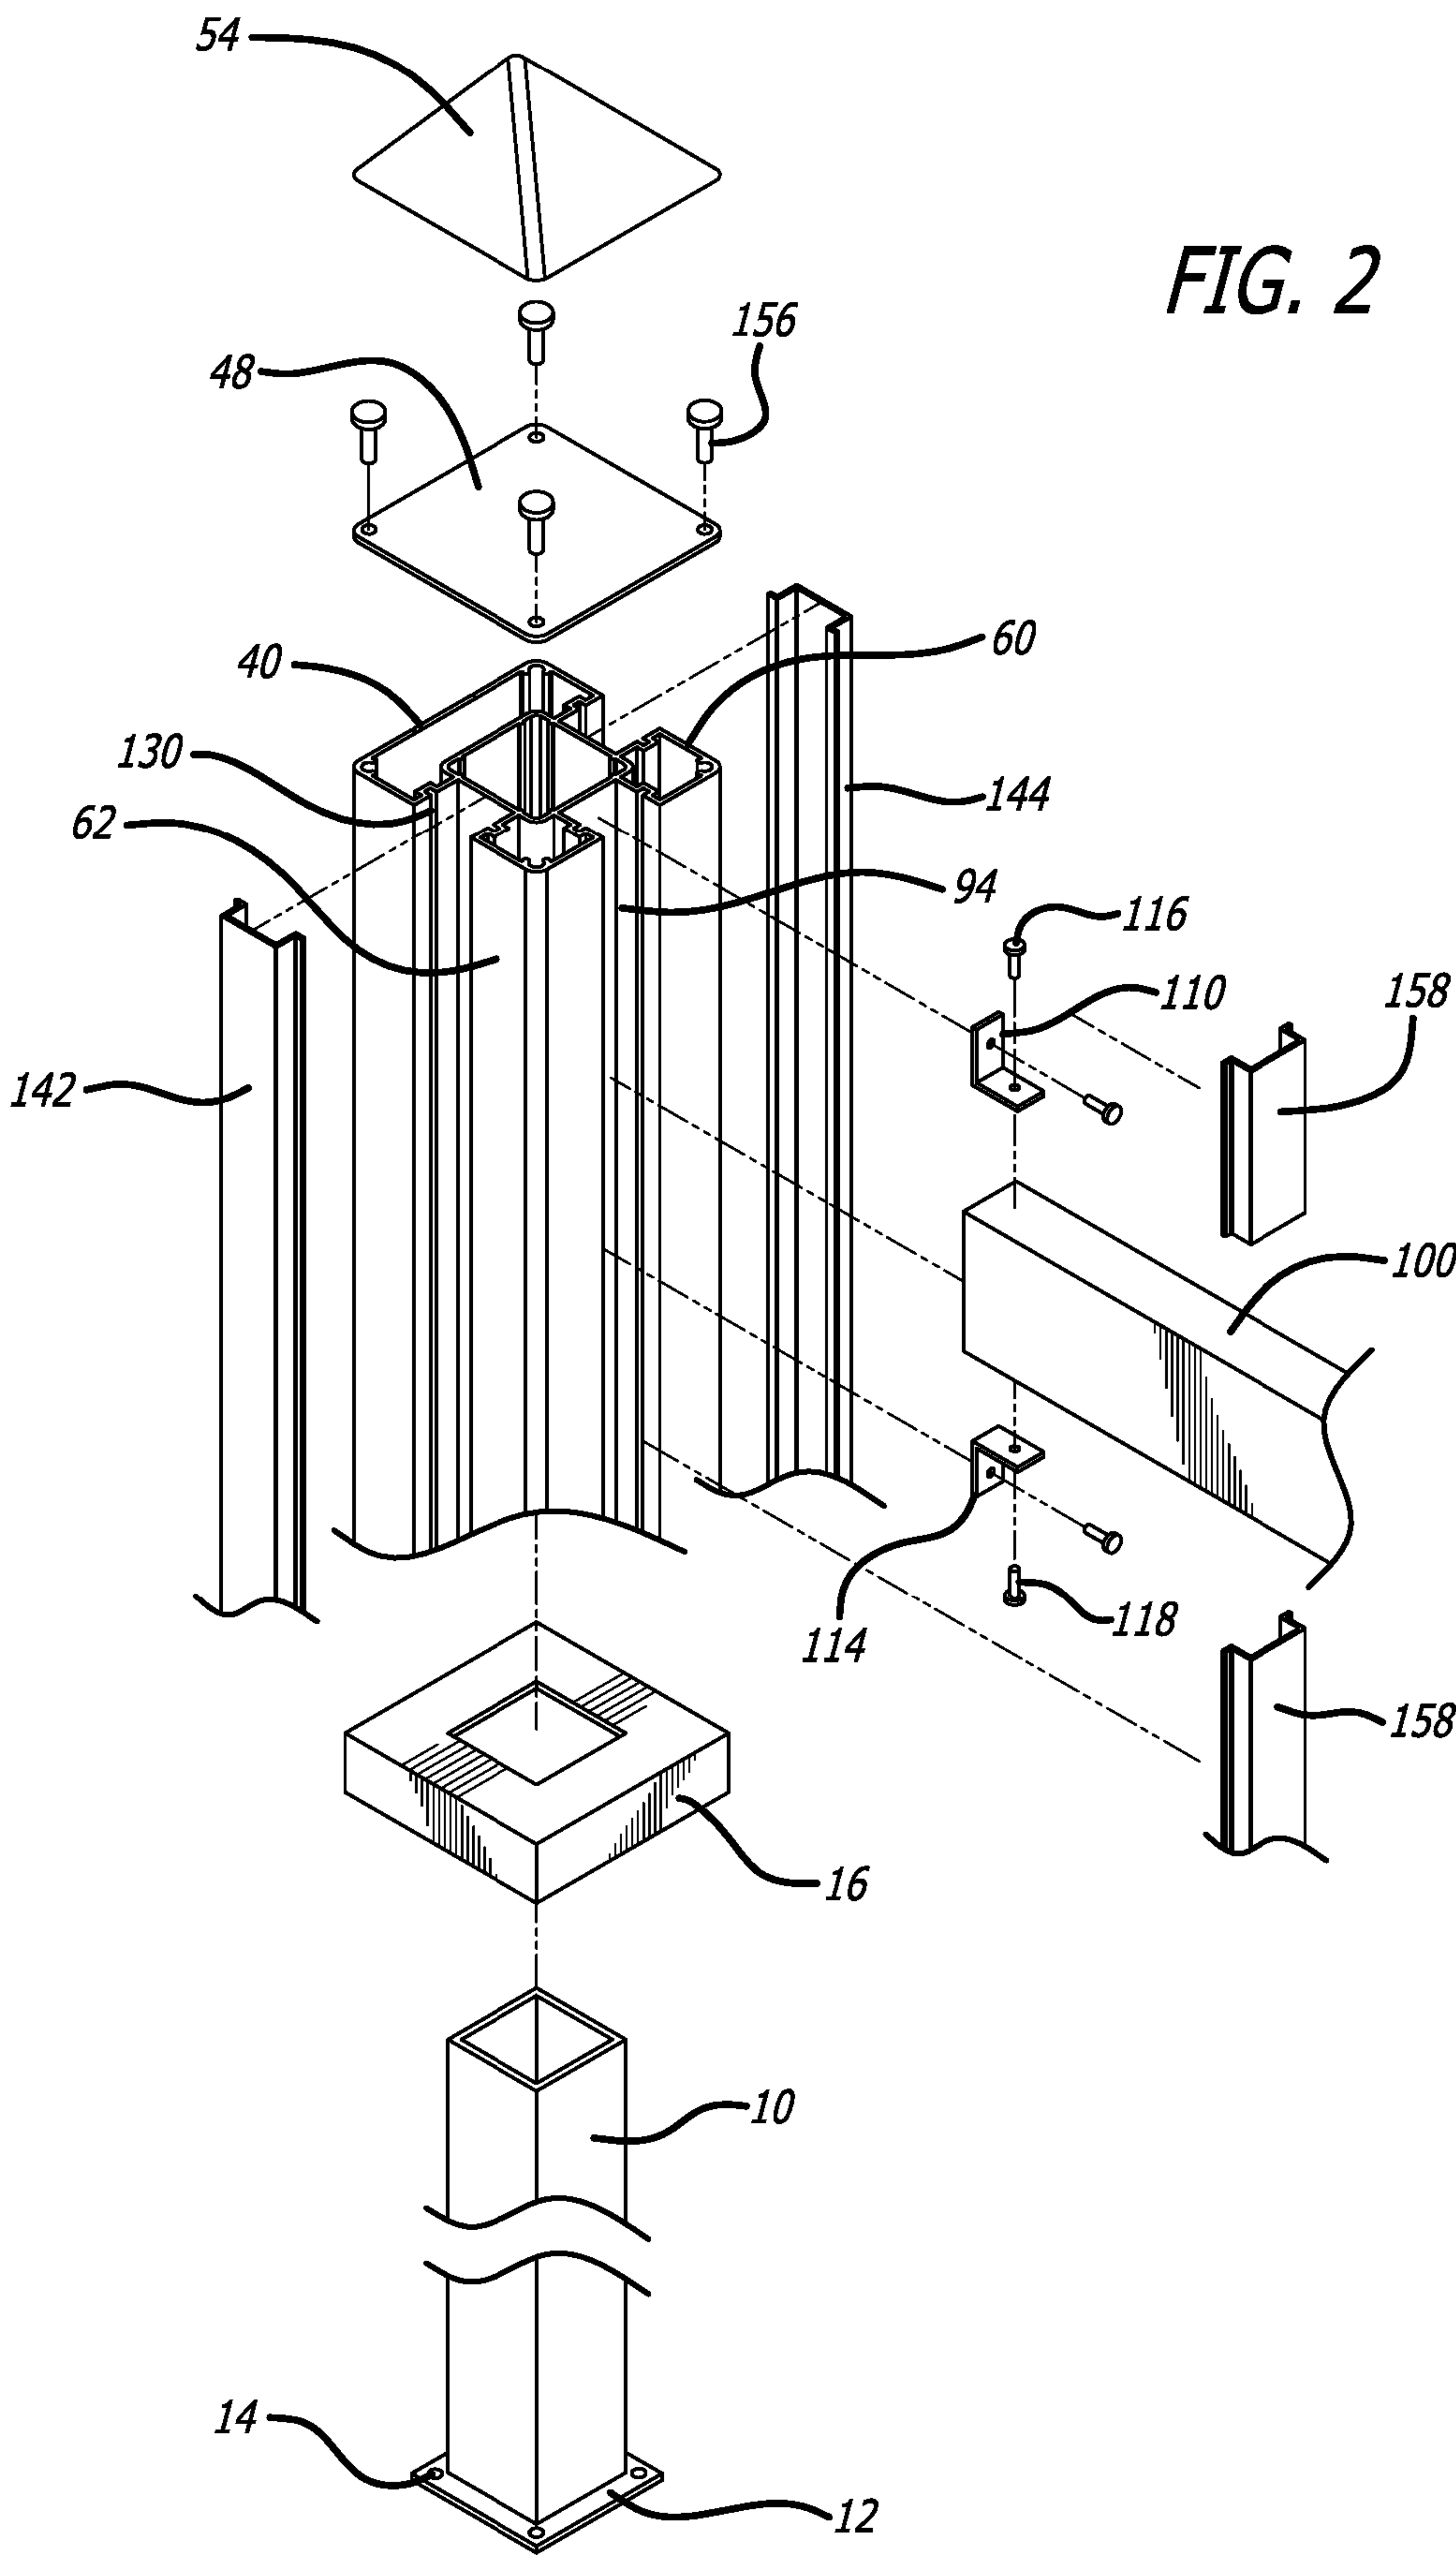

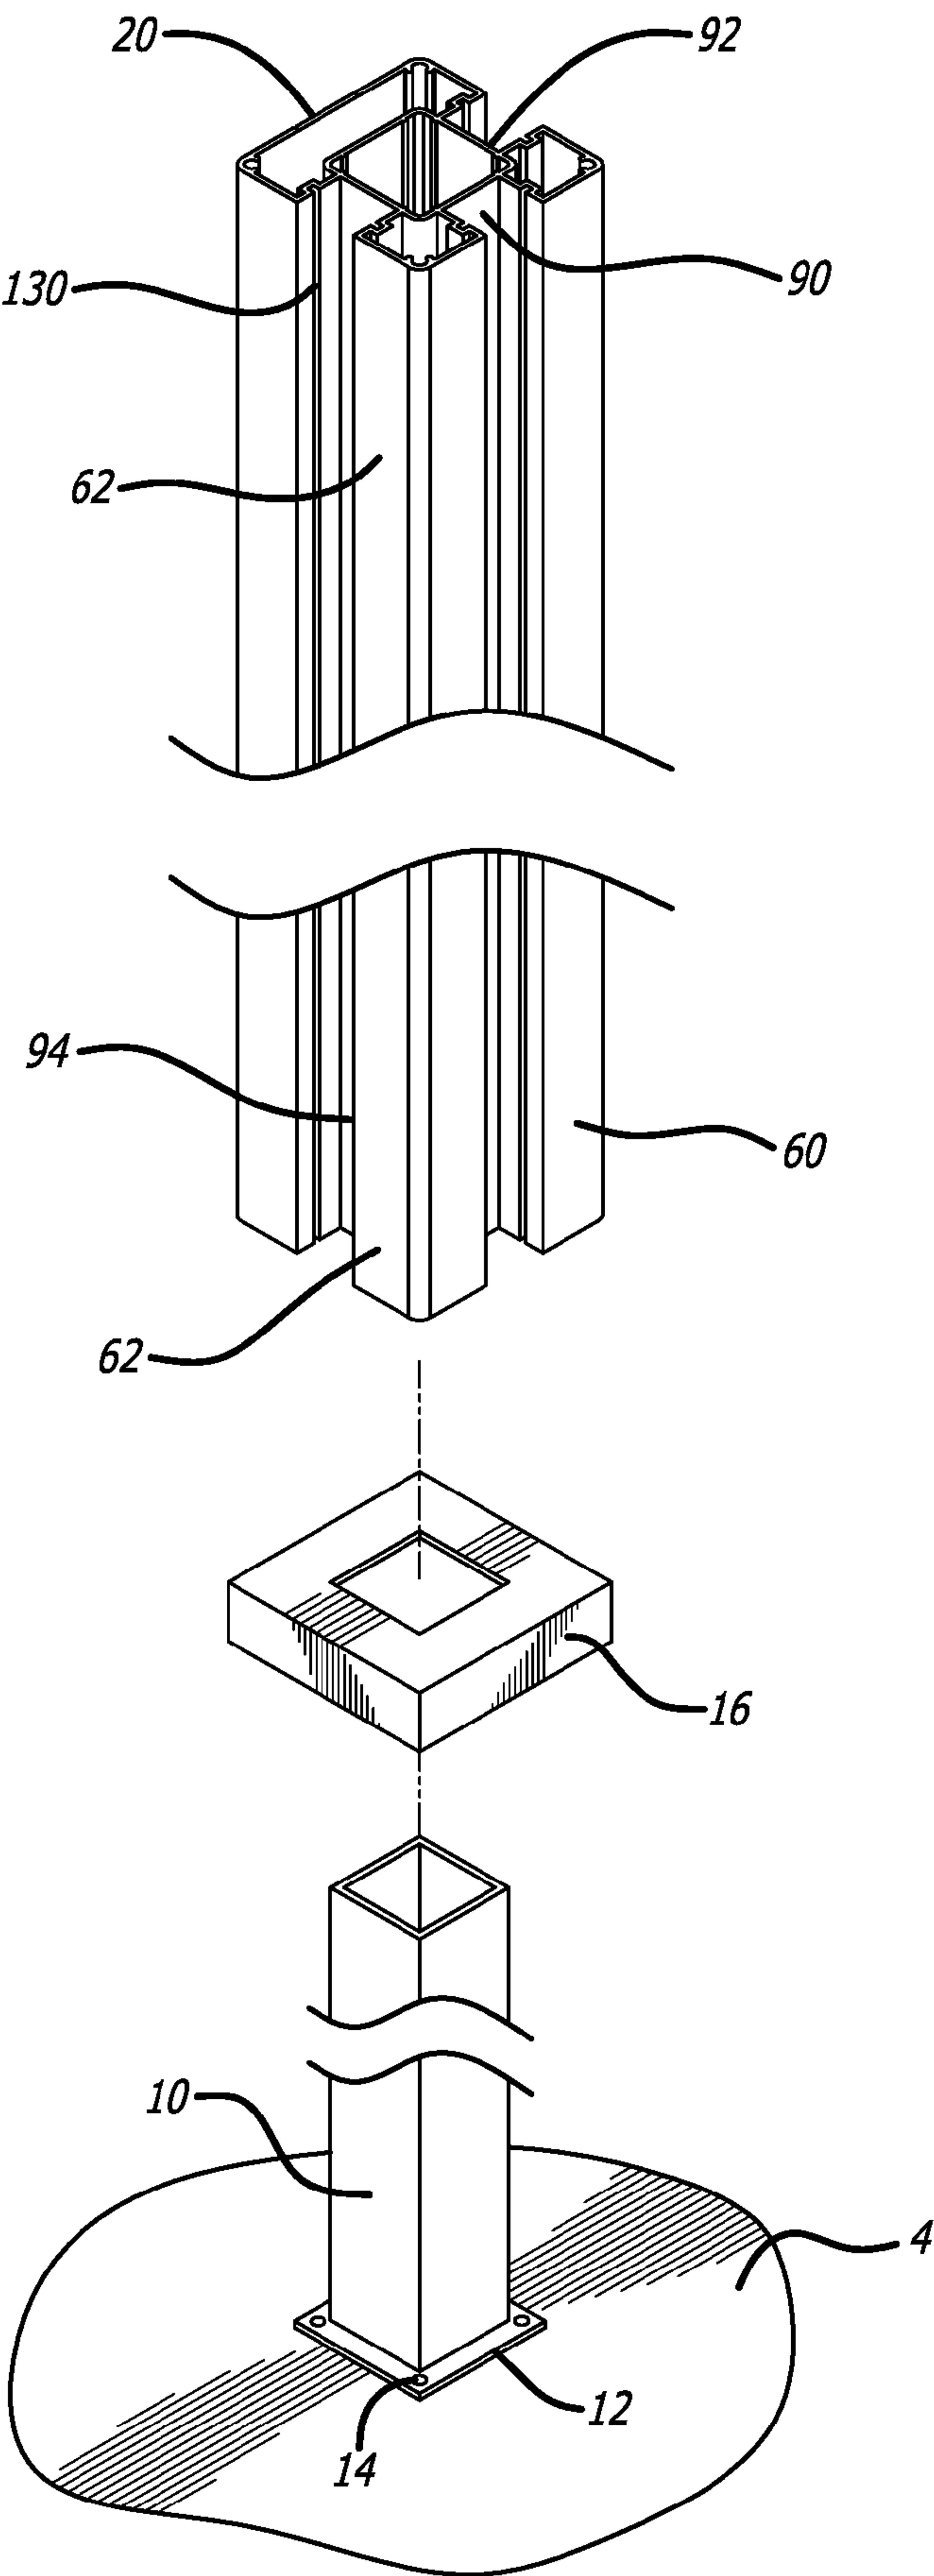


FIG. 2A



FIG. 2B

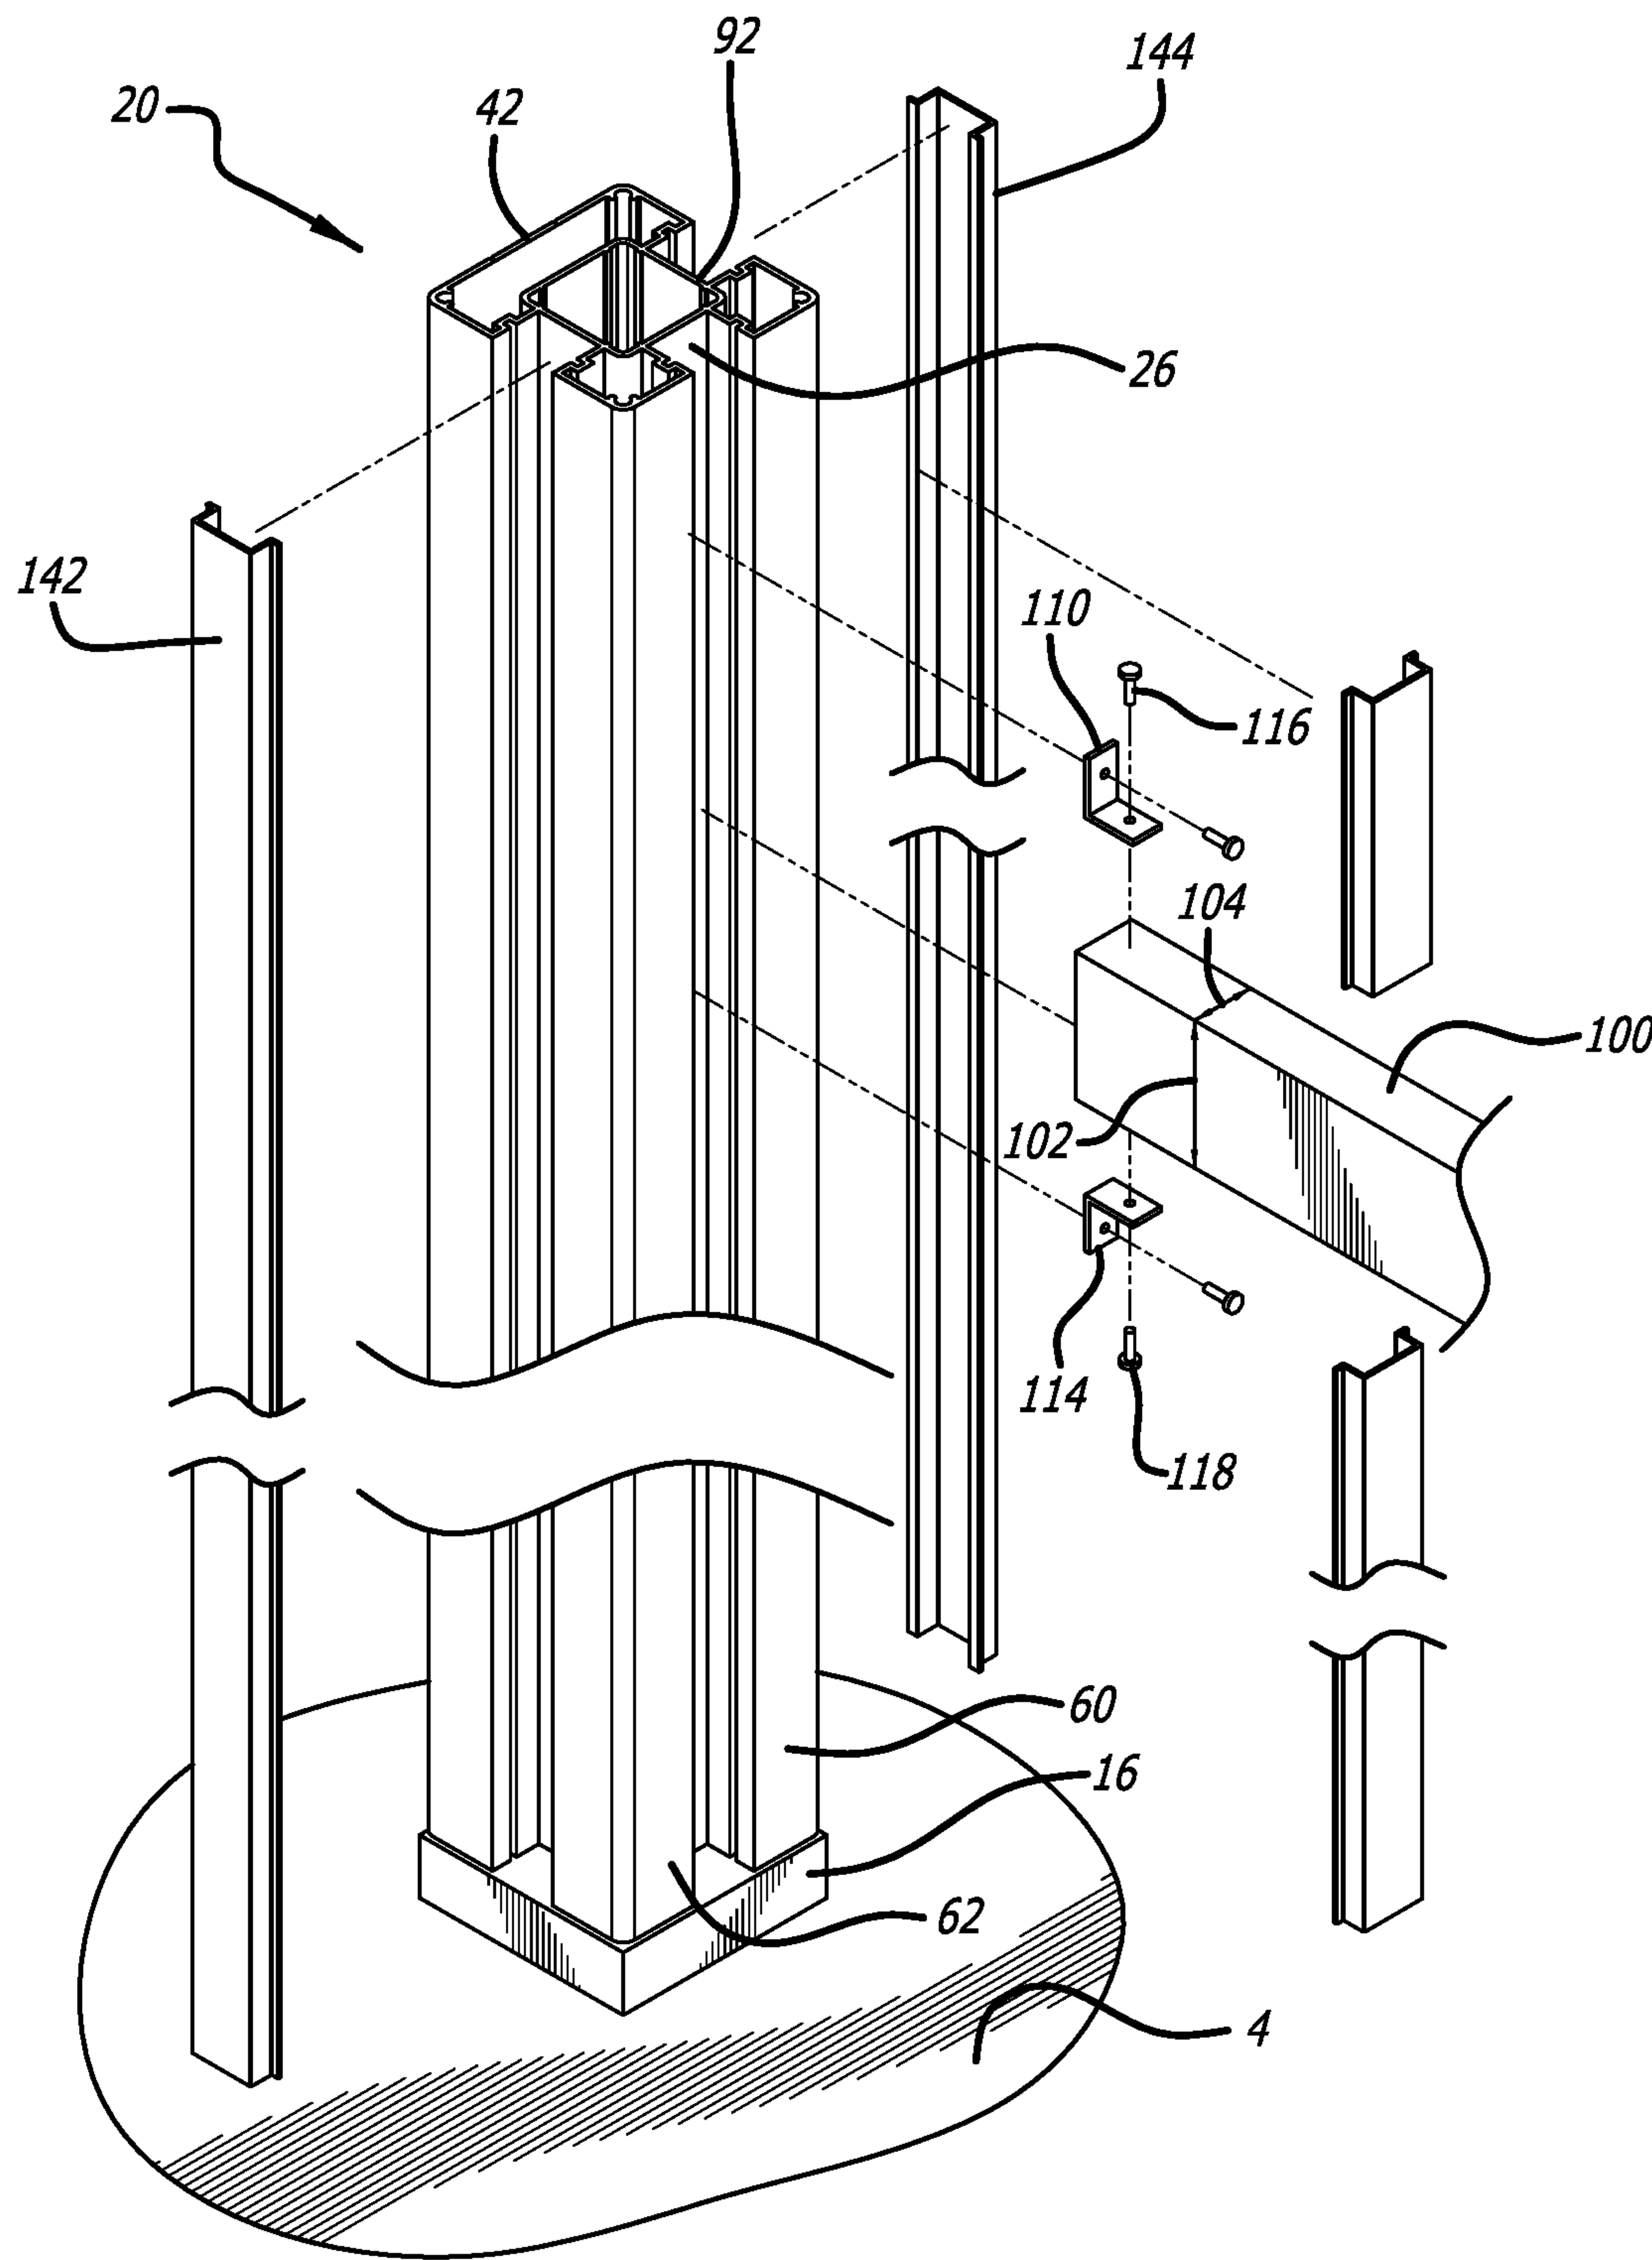
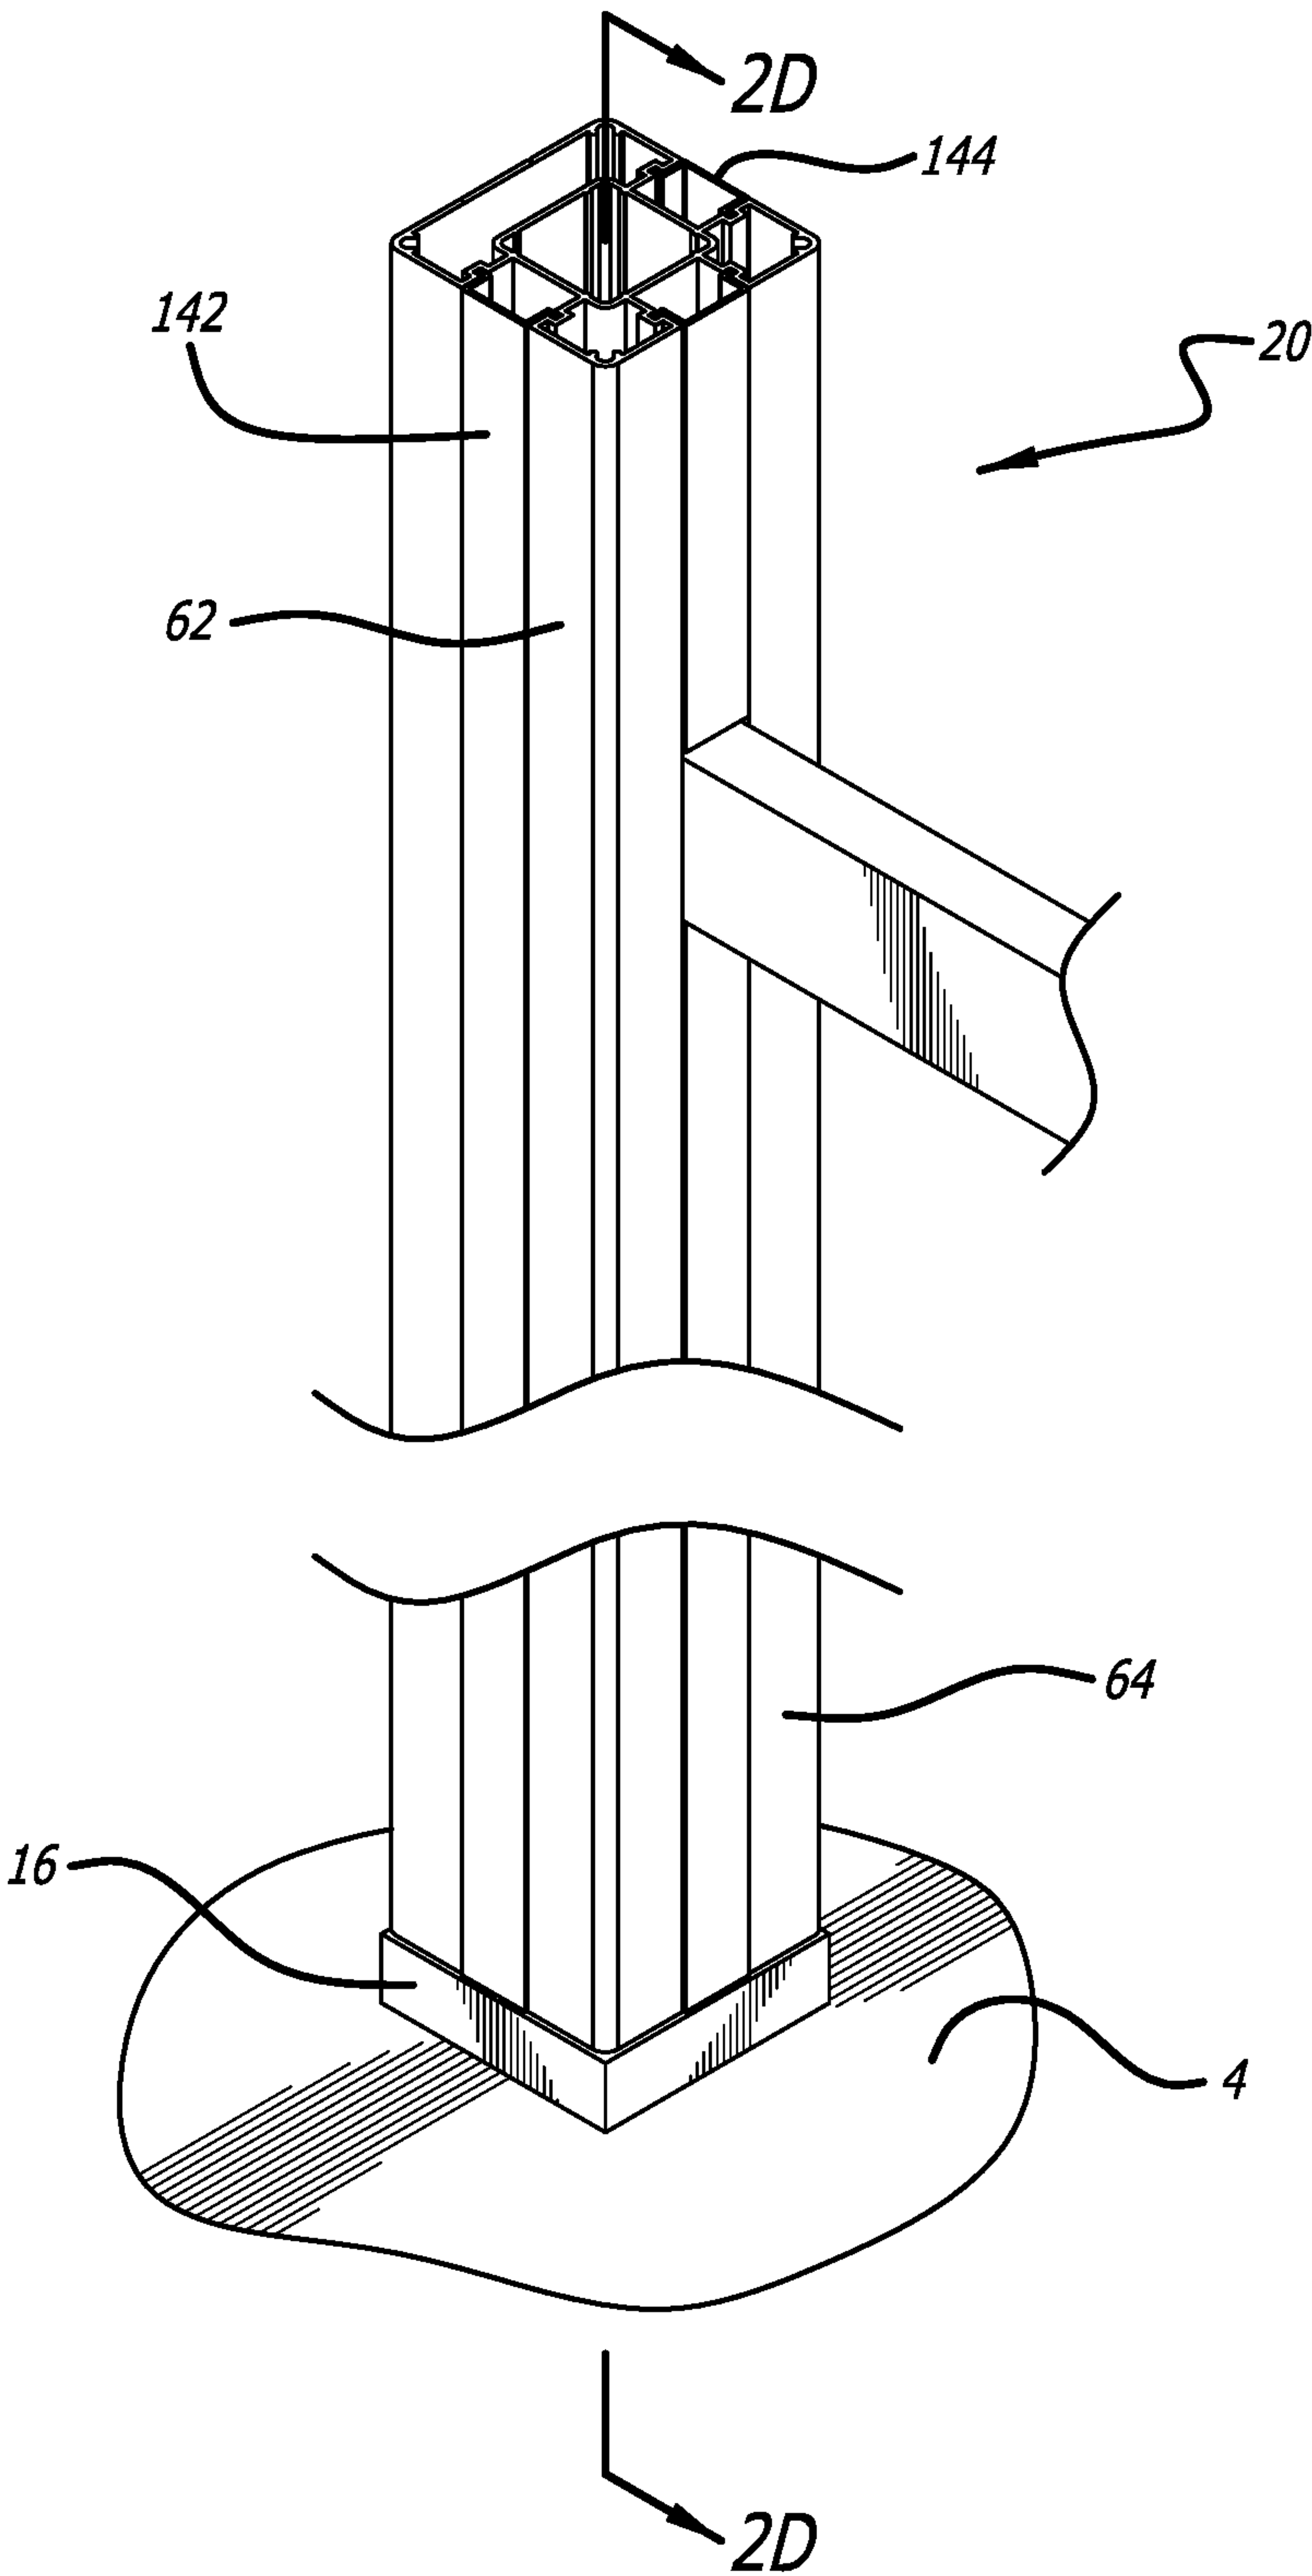


FIG. 2C



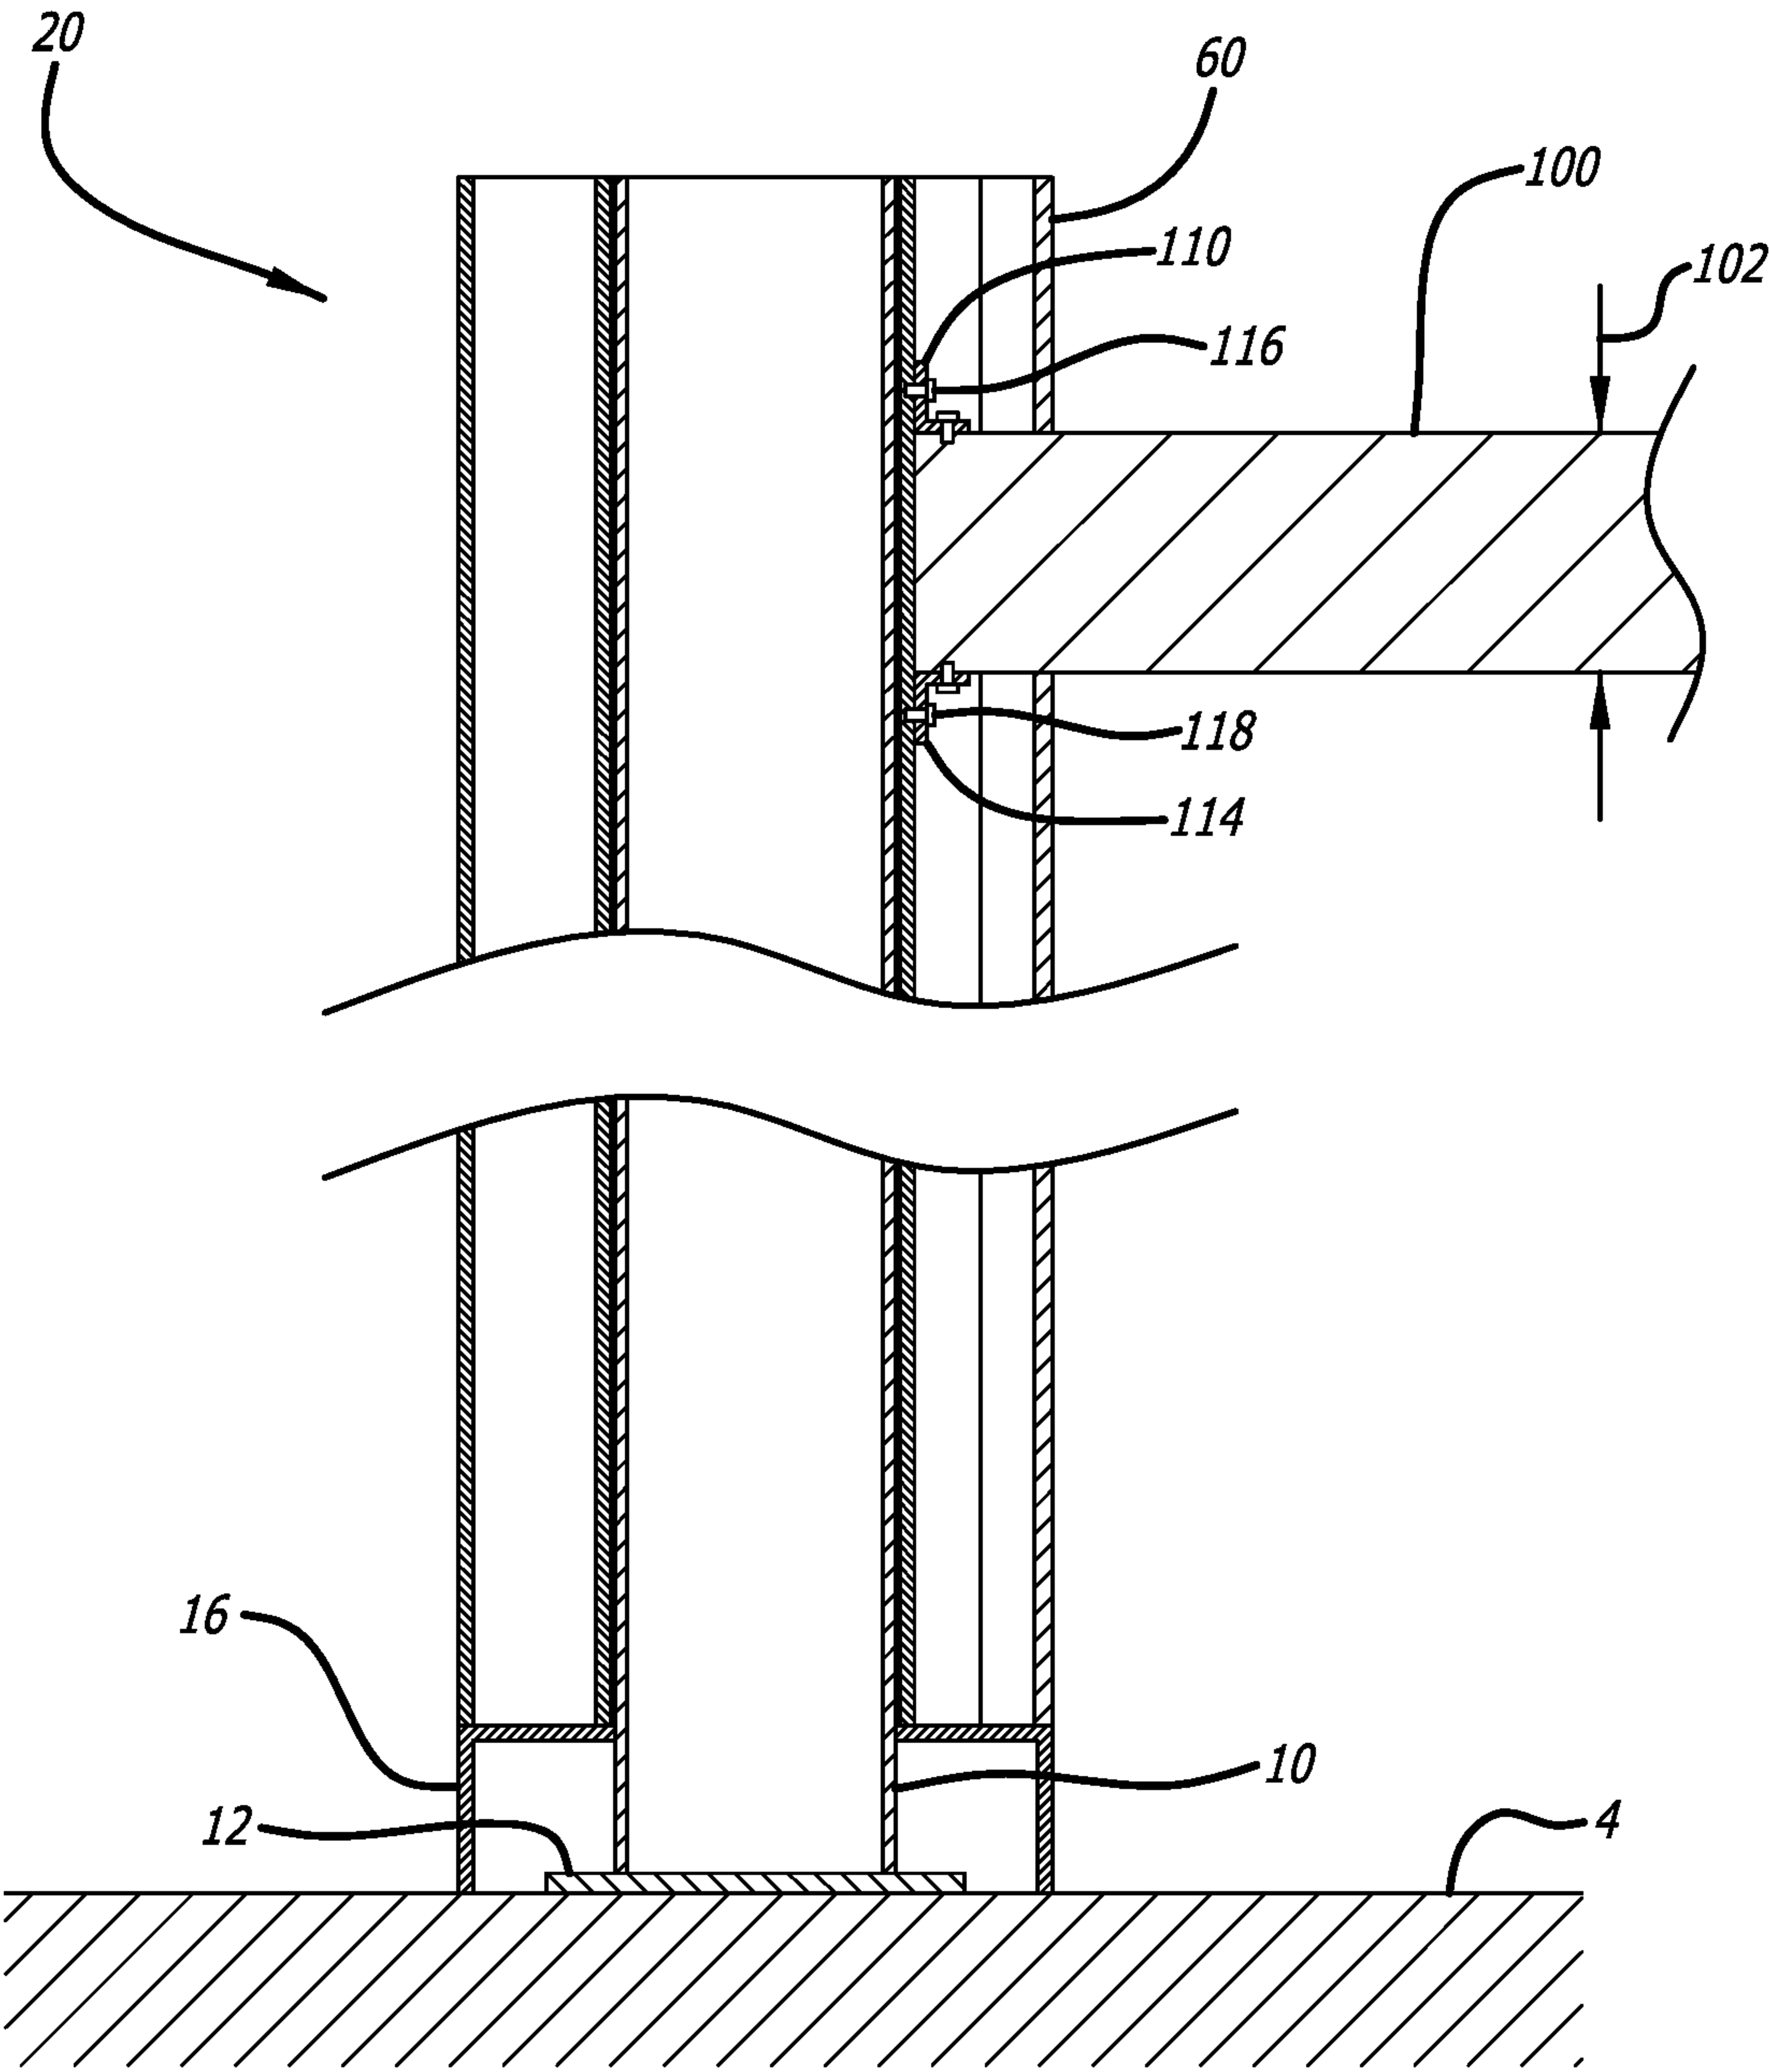


FIG. 2D

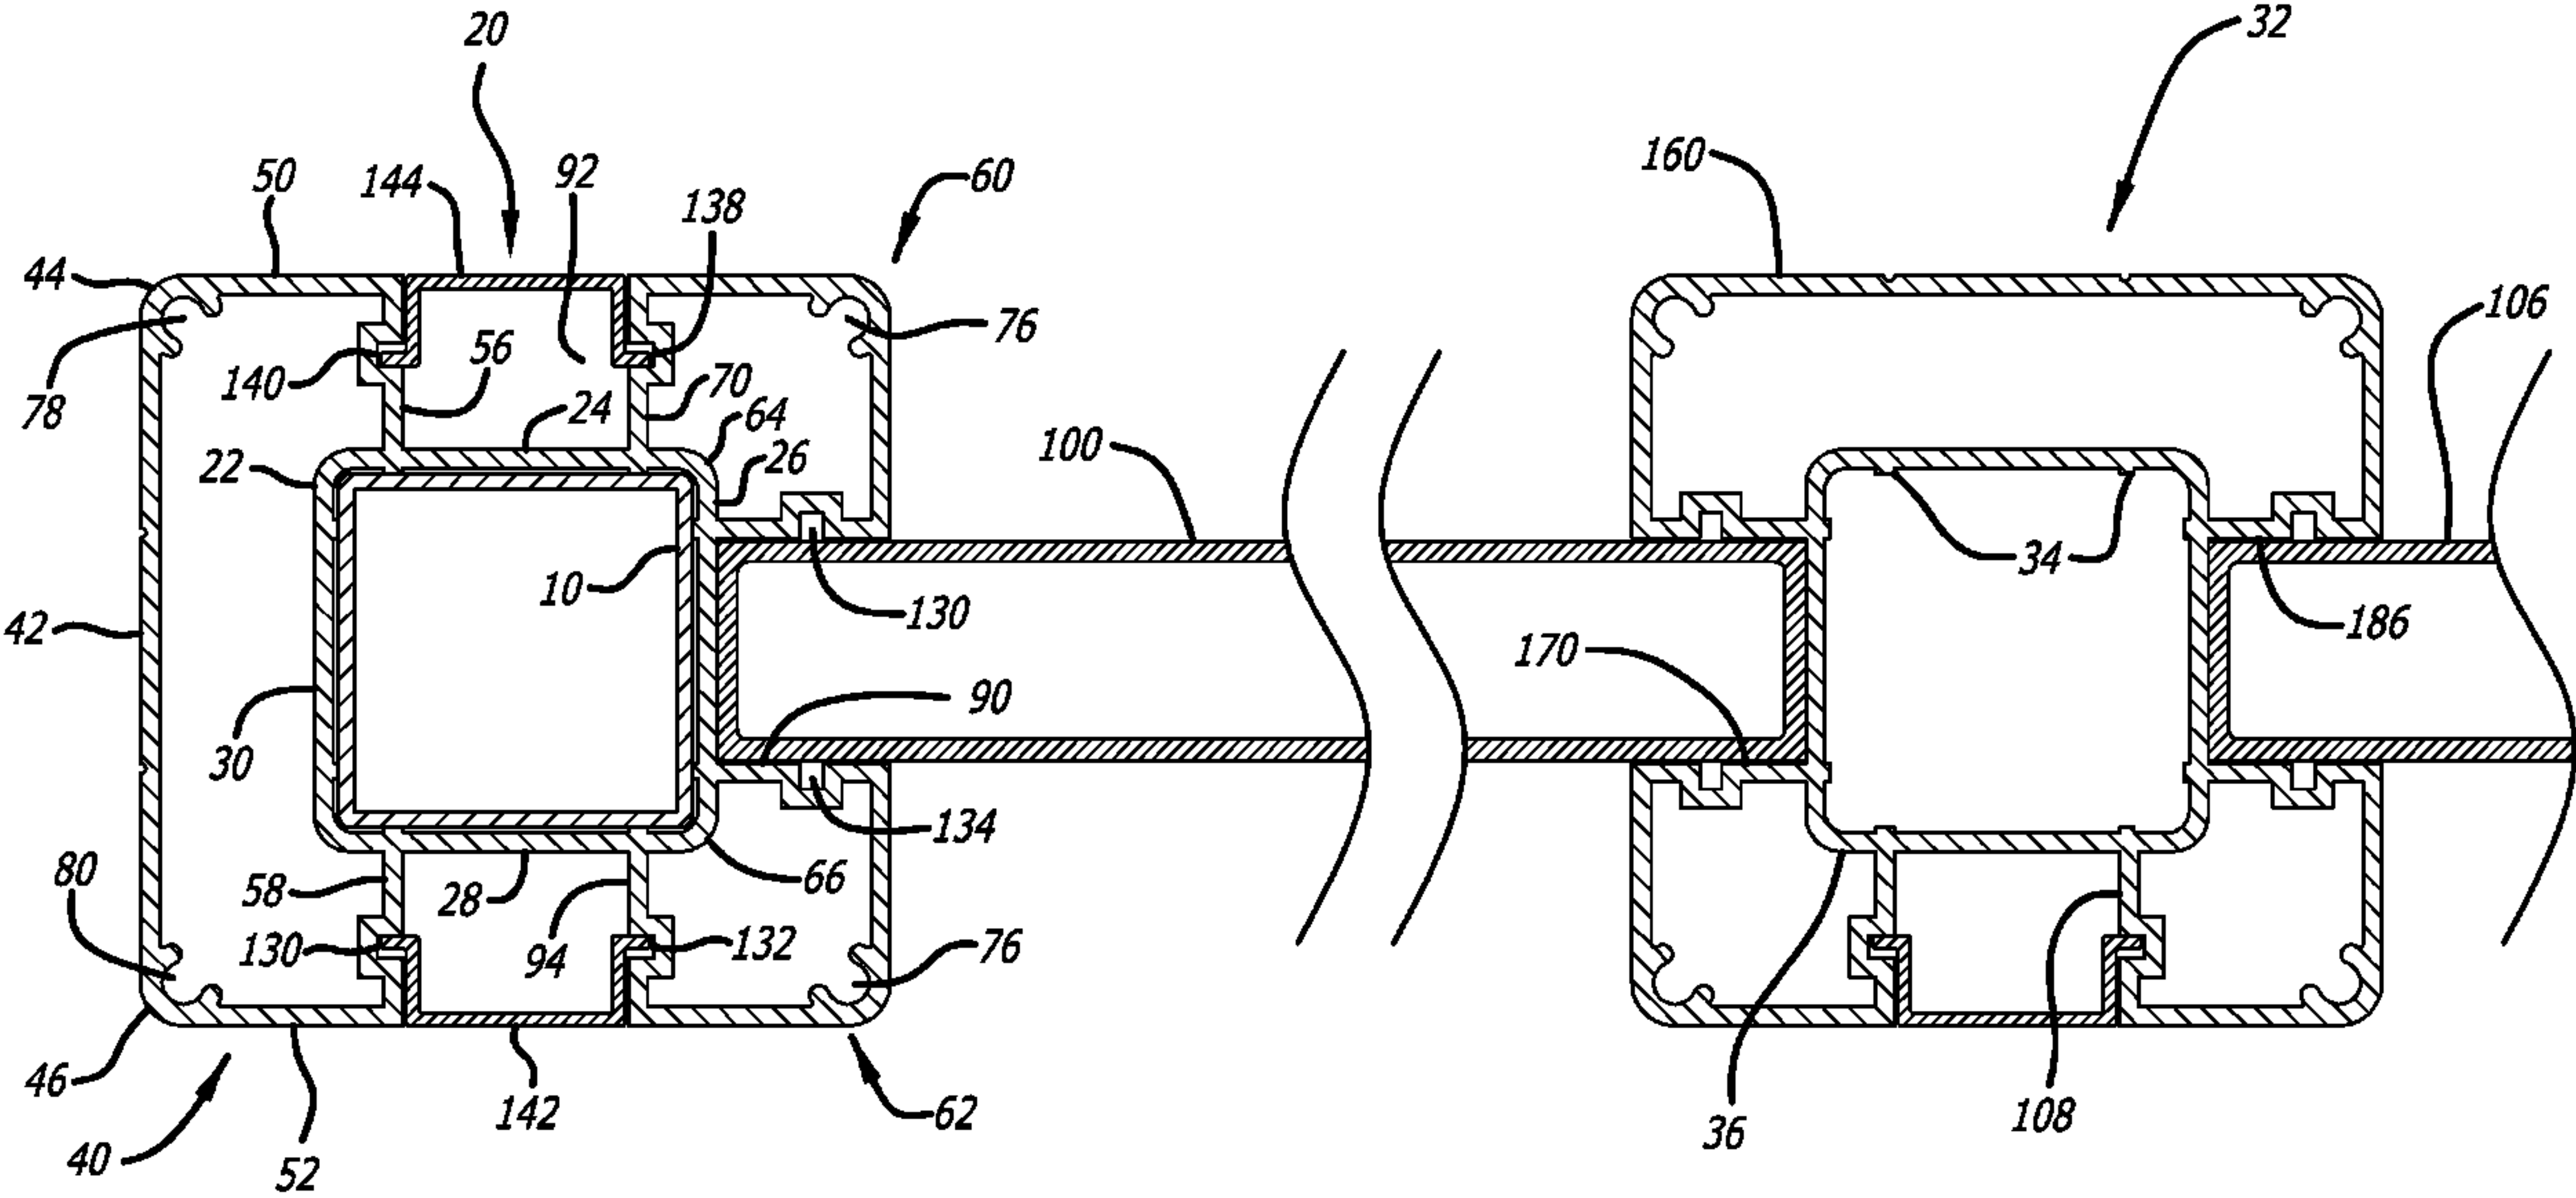


FIG. 3



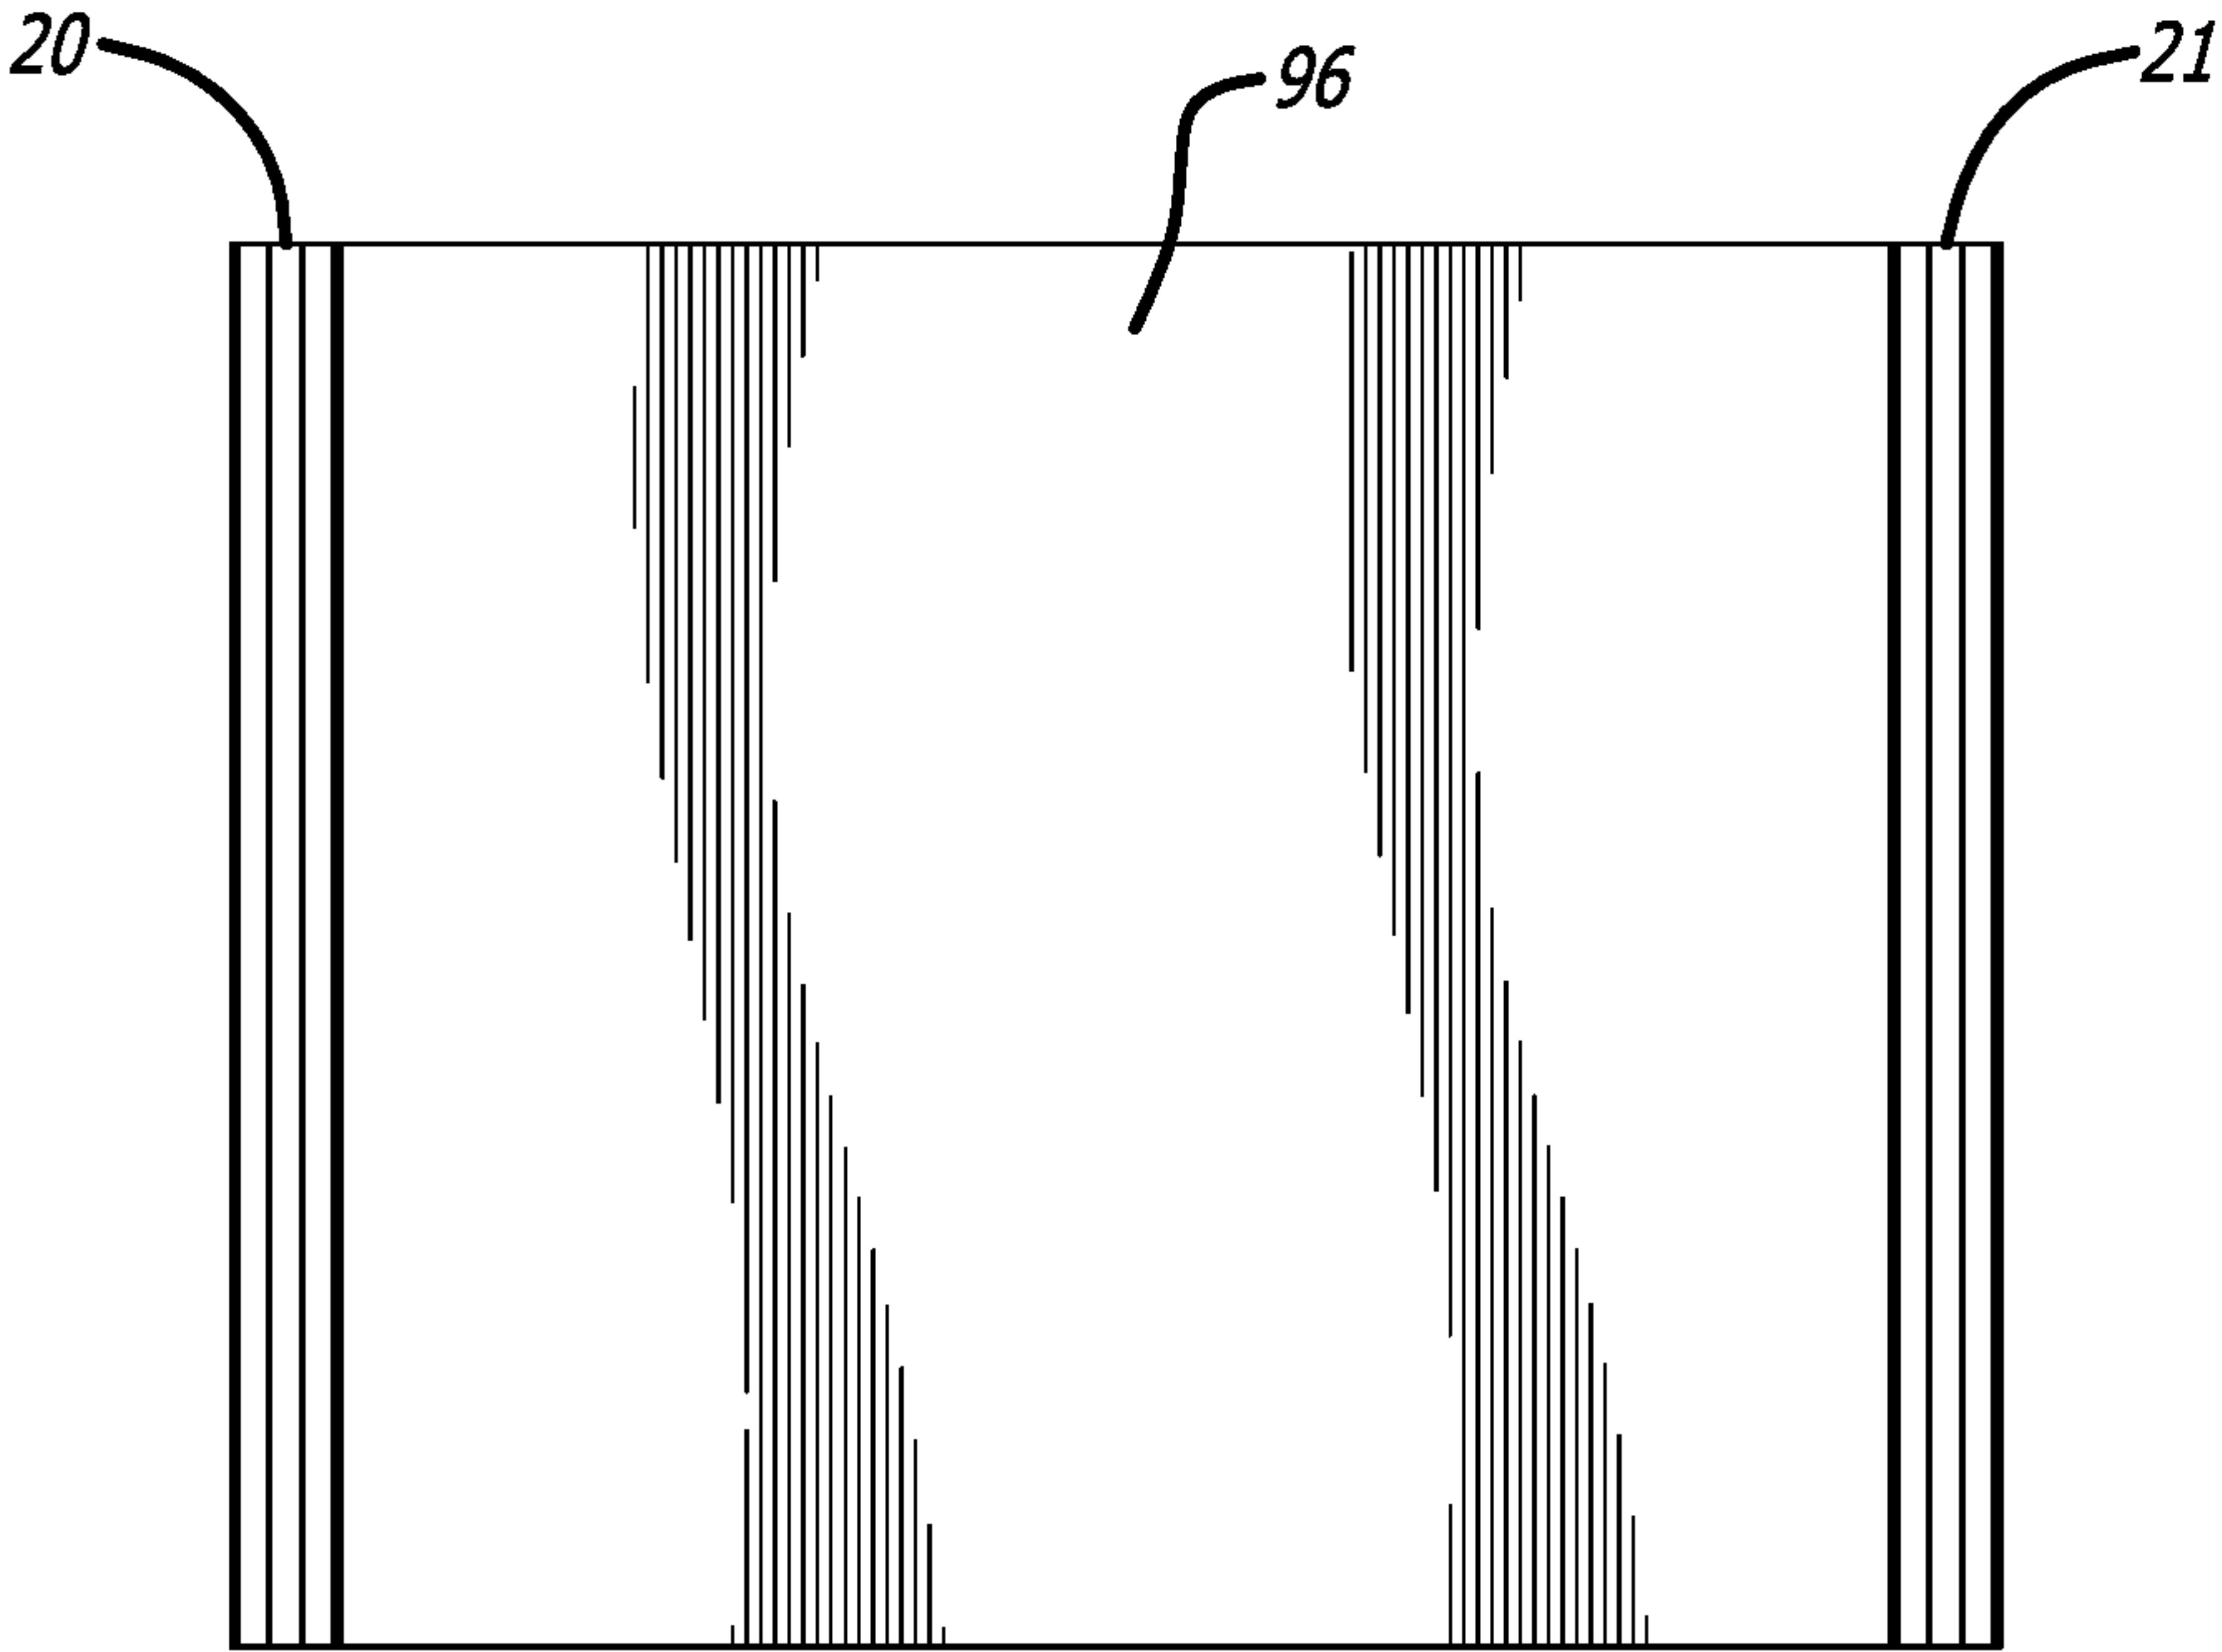


FIG. 4

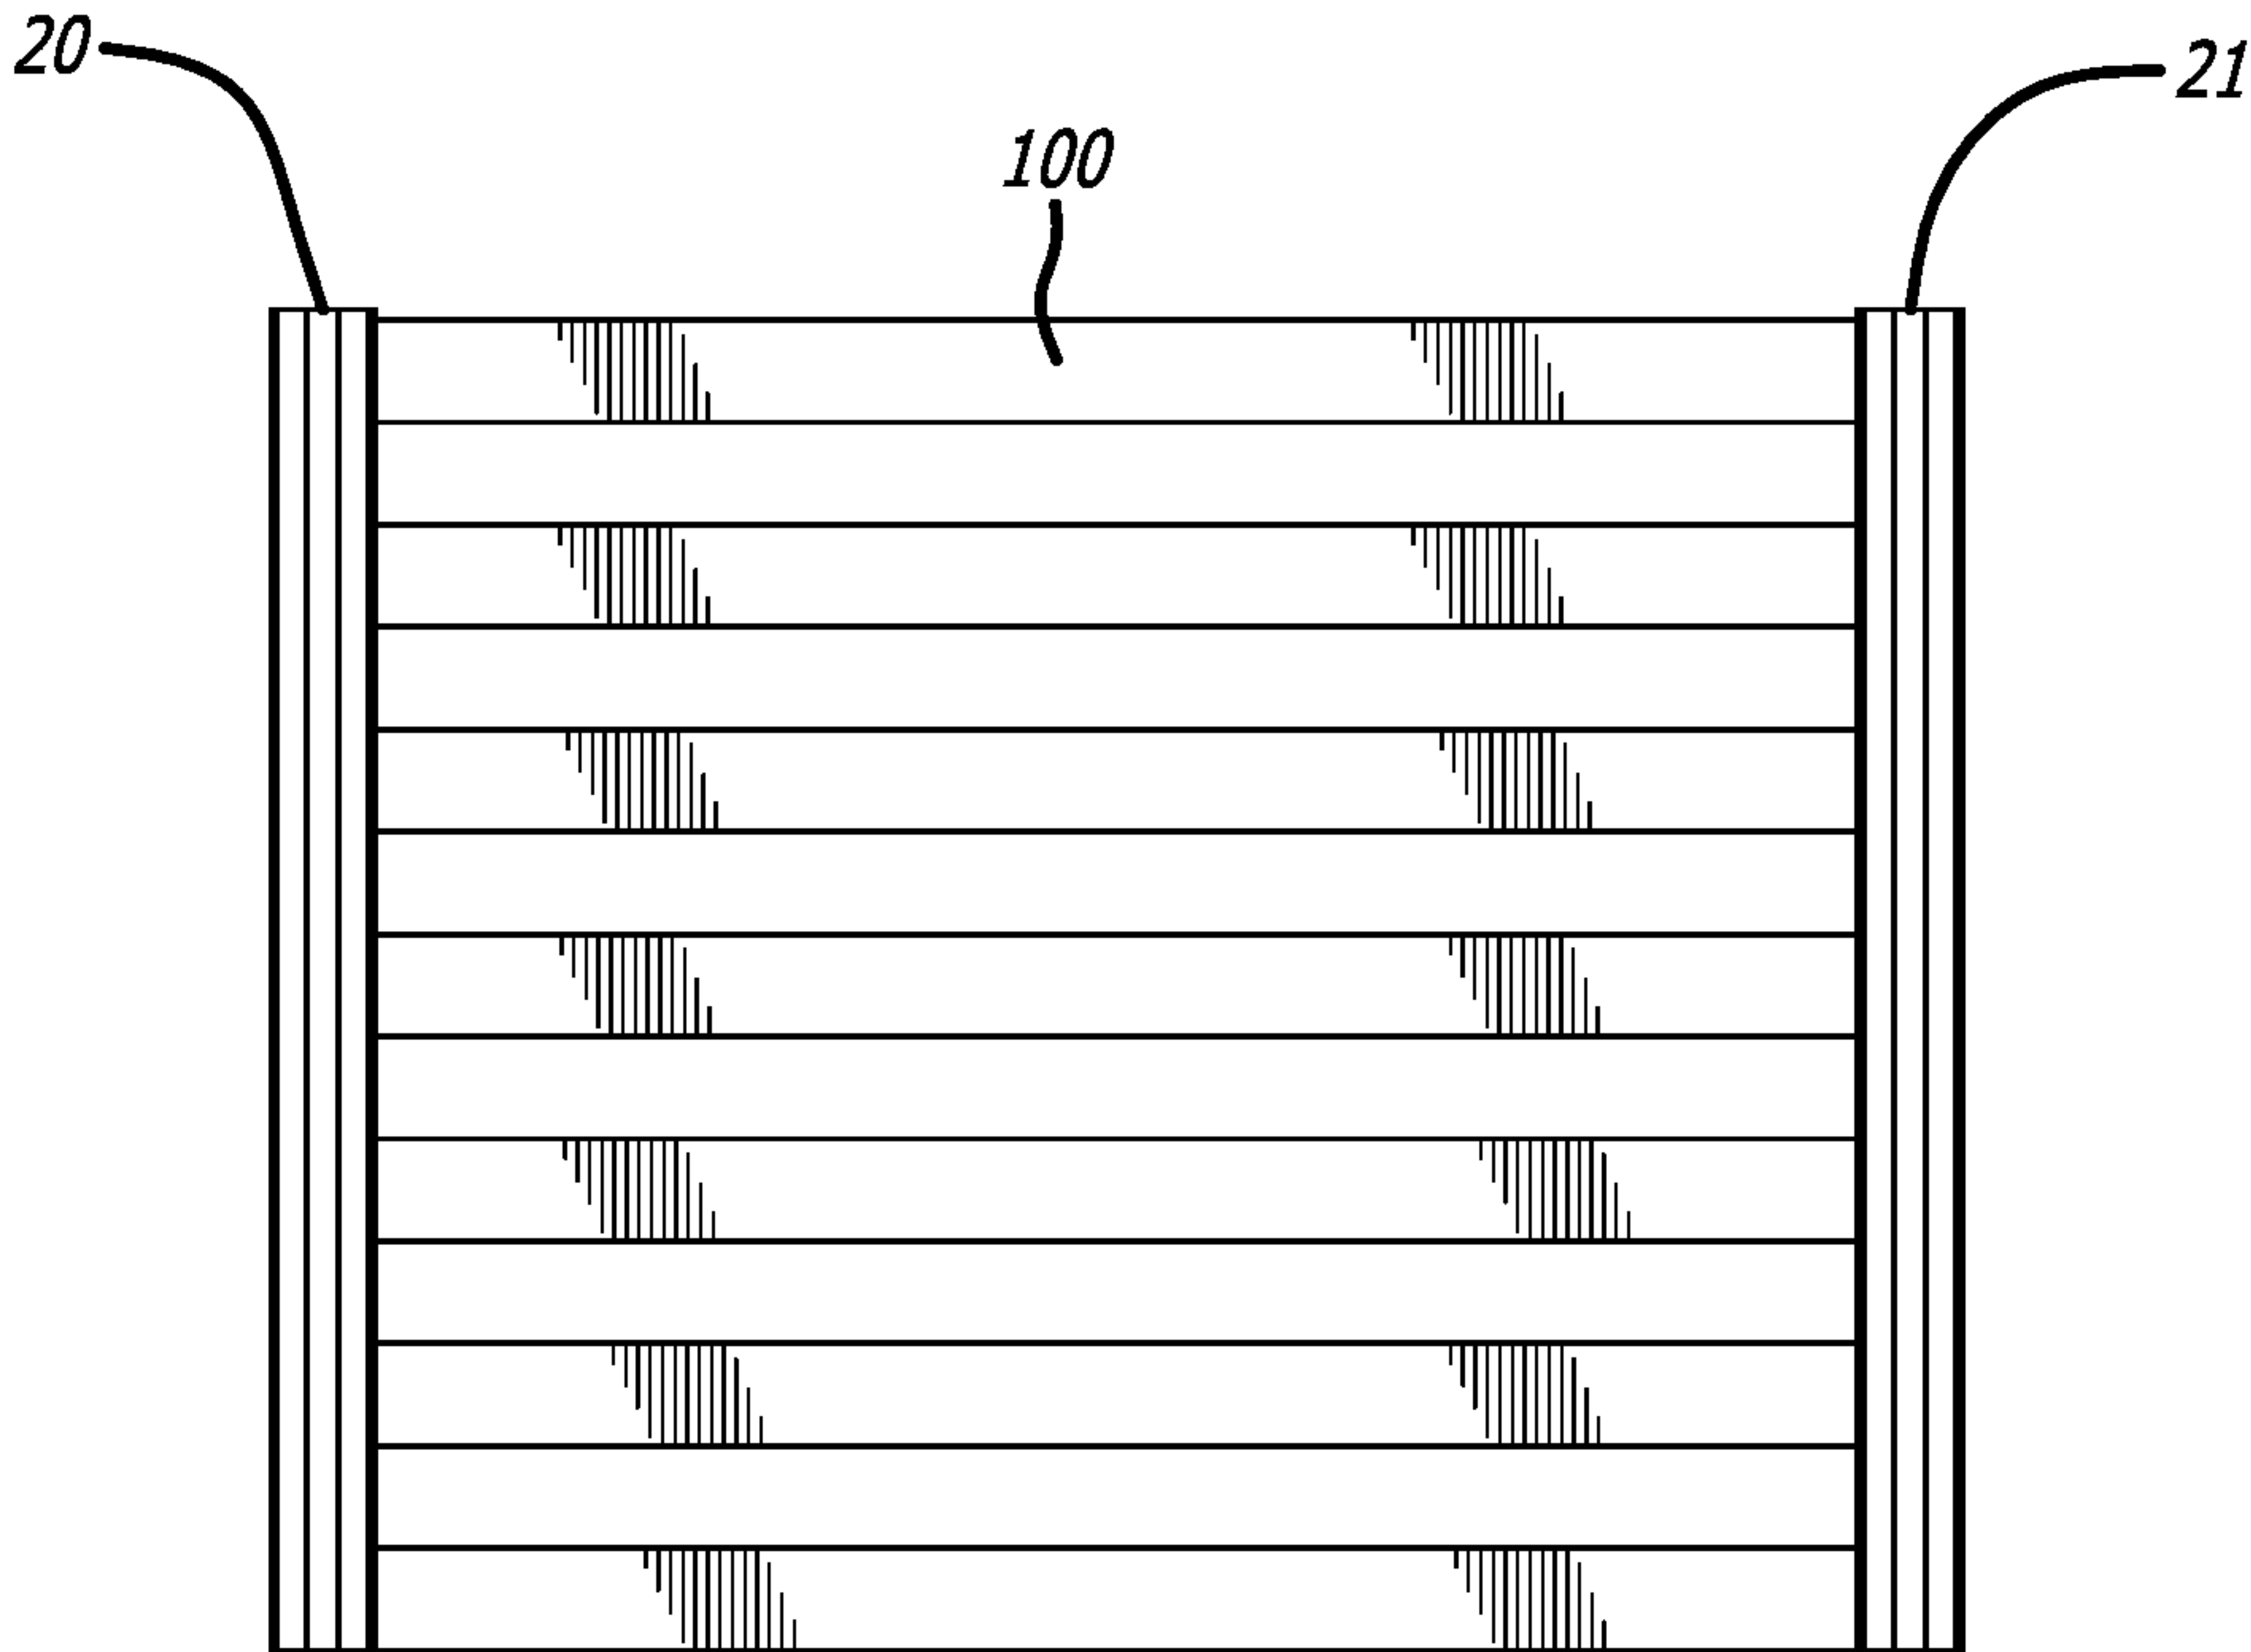


FIG. 5

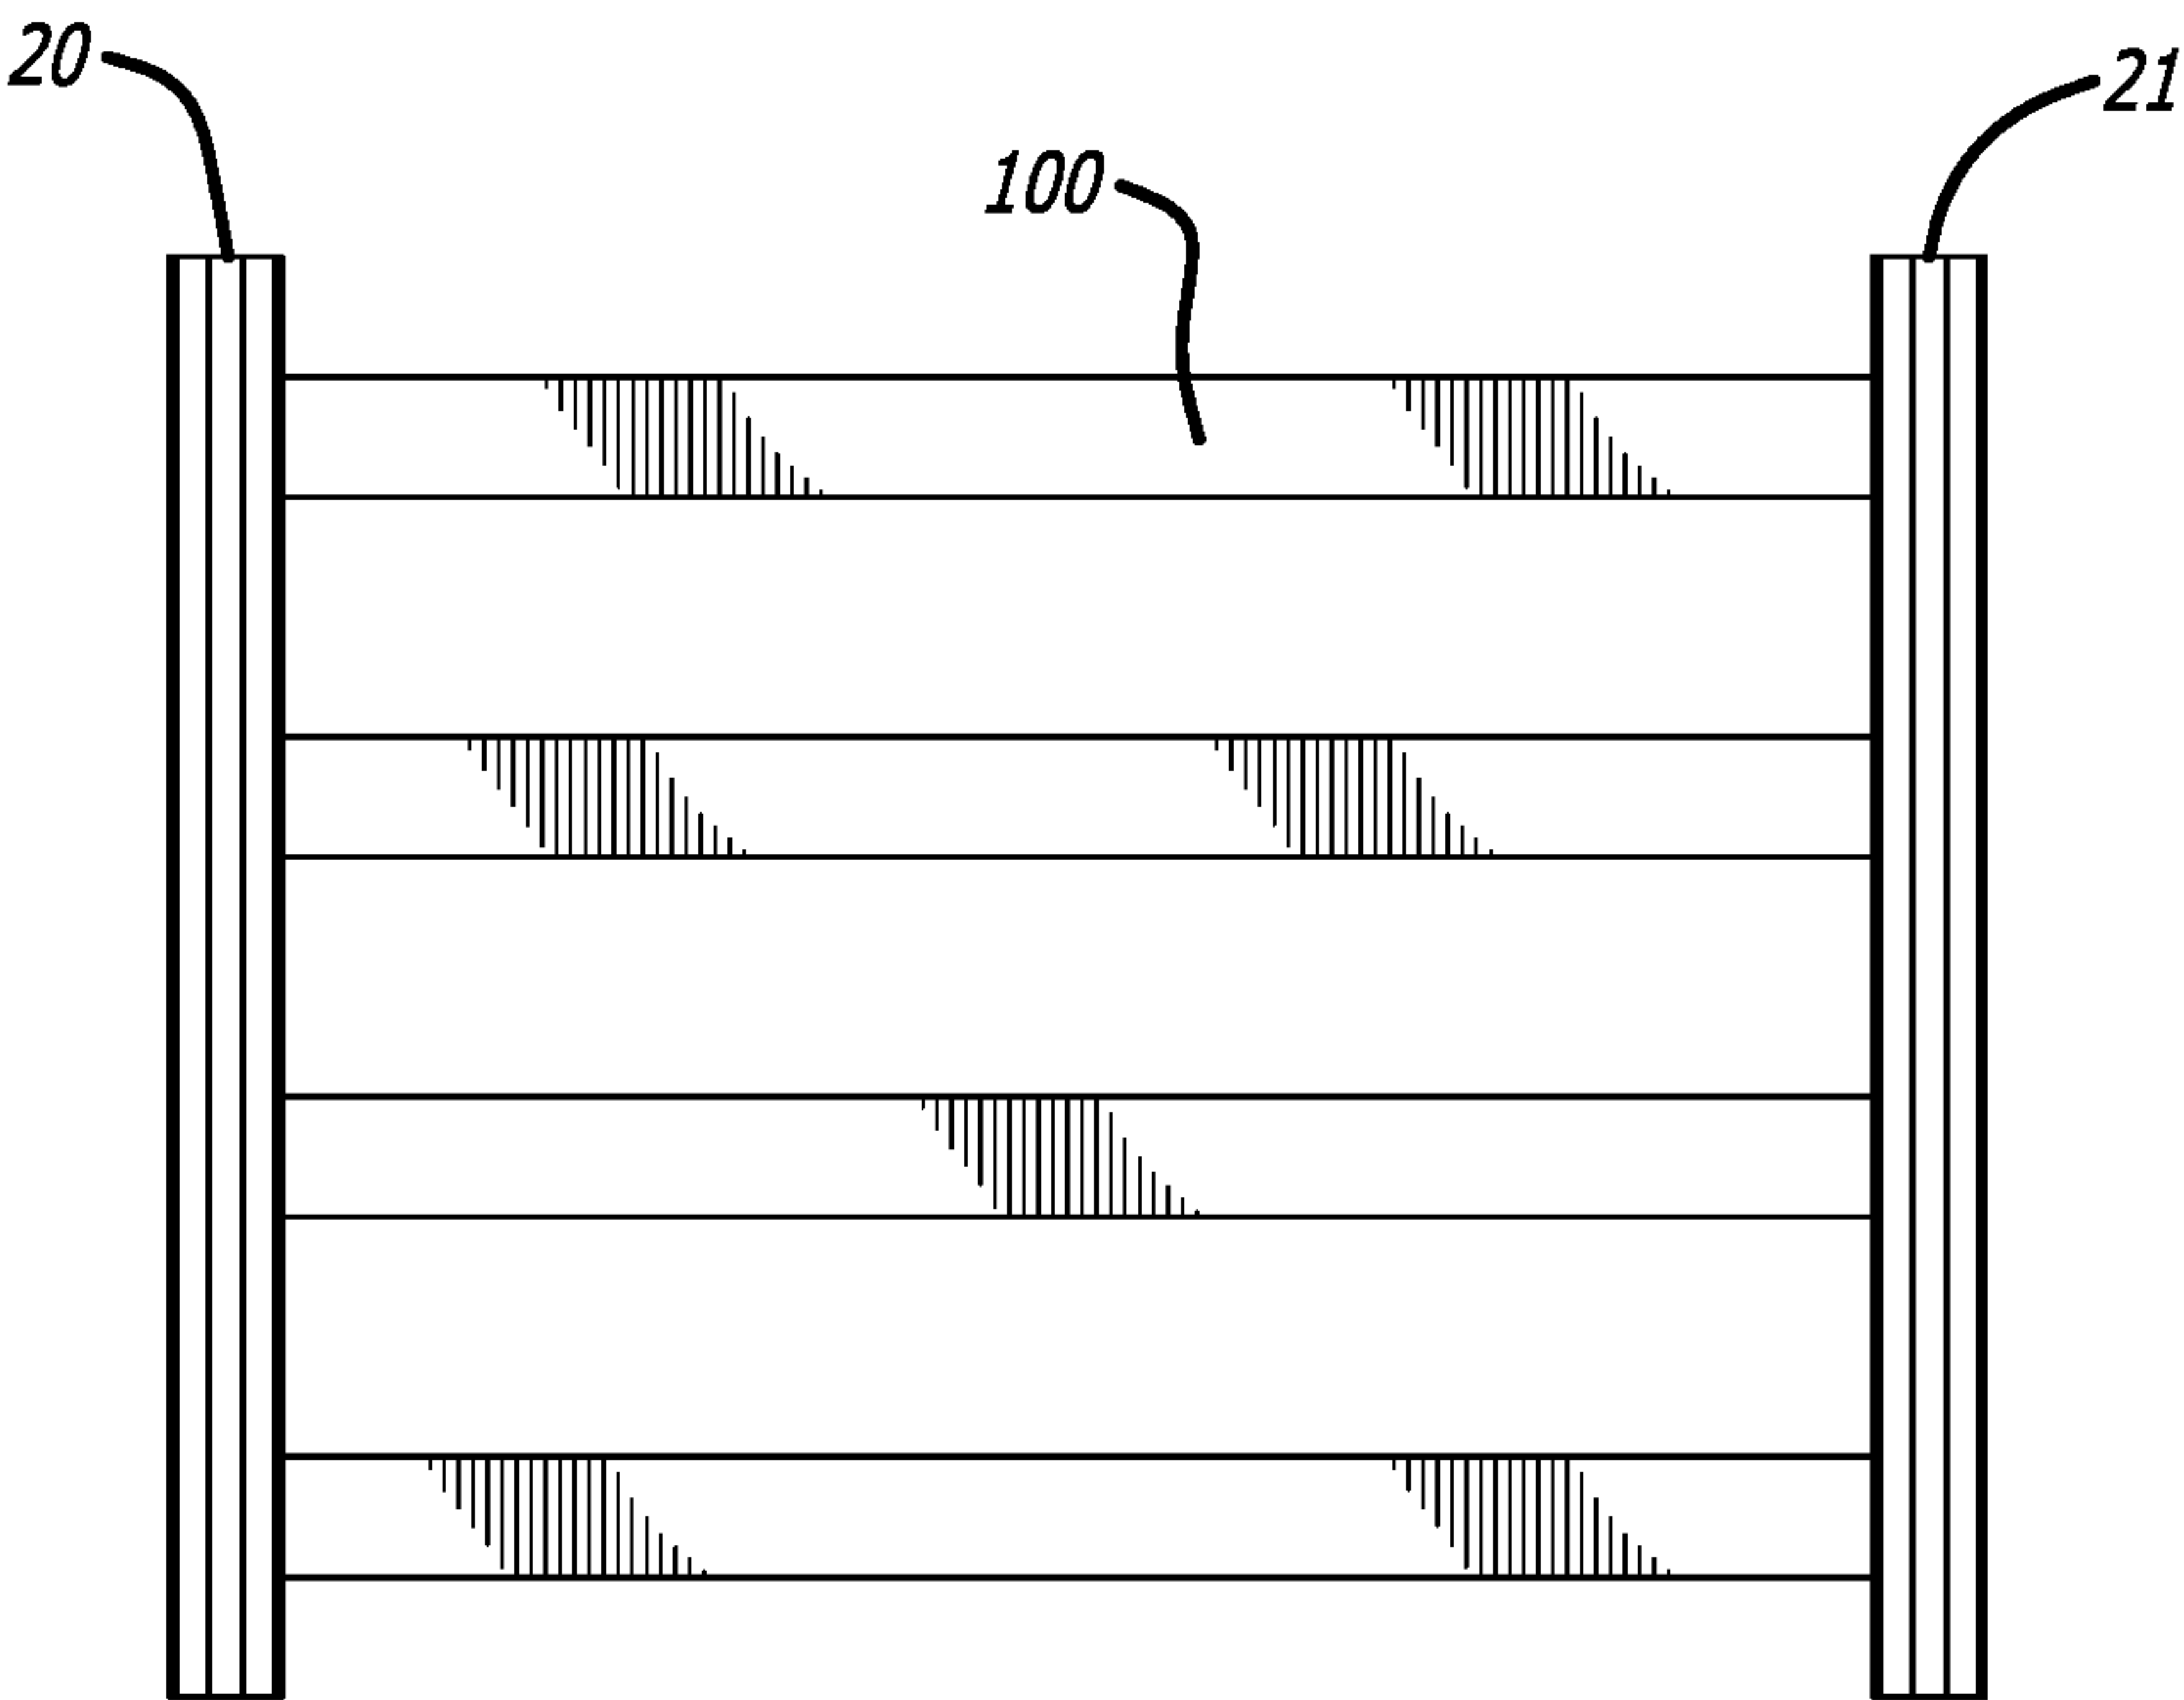


FIG. 6

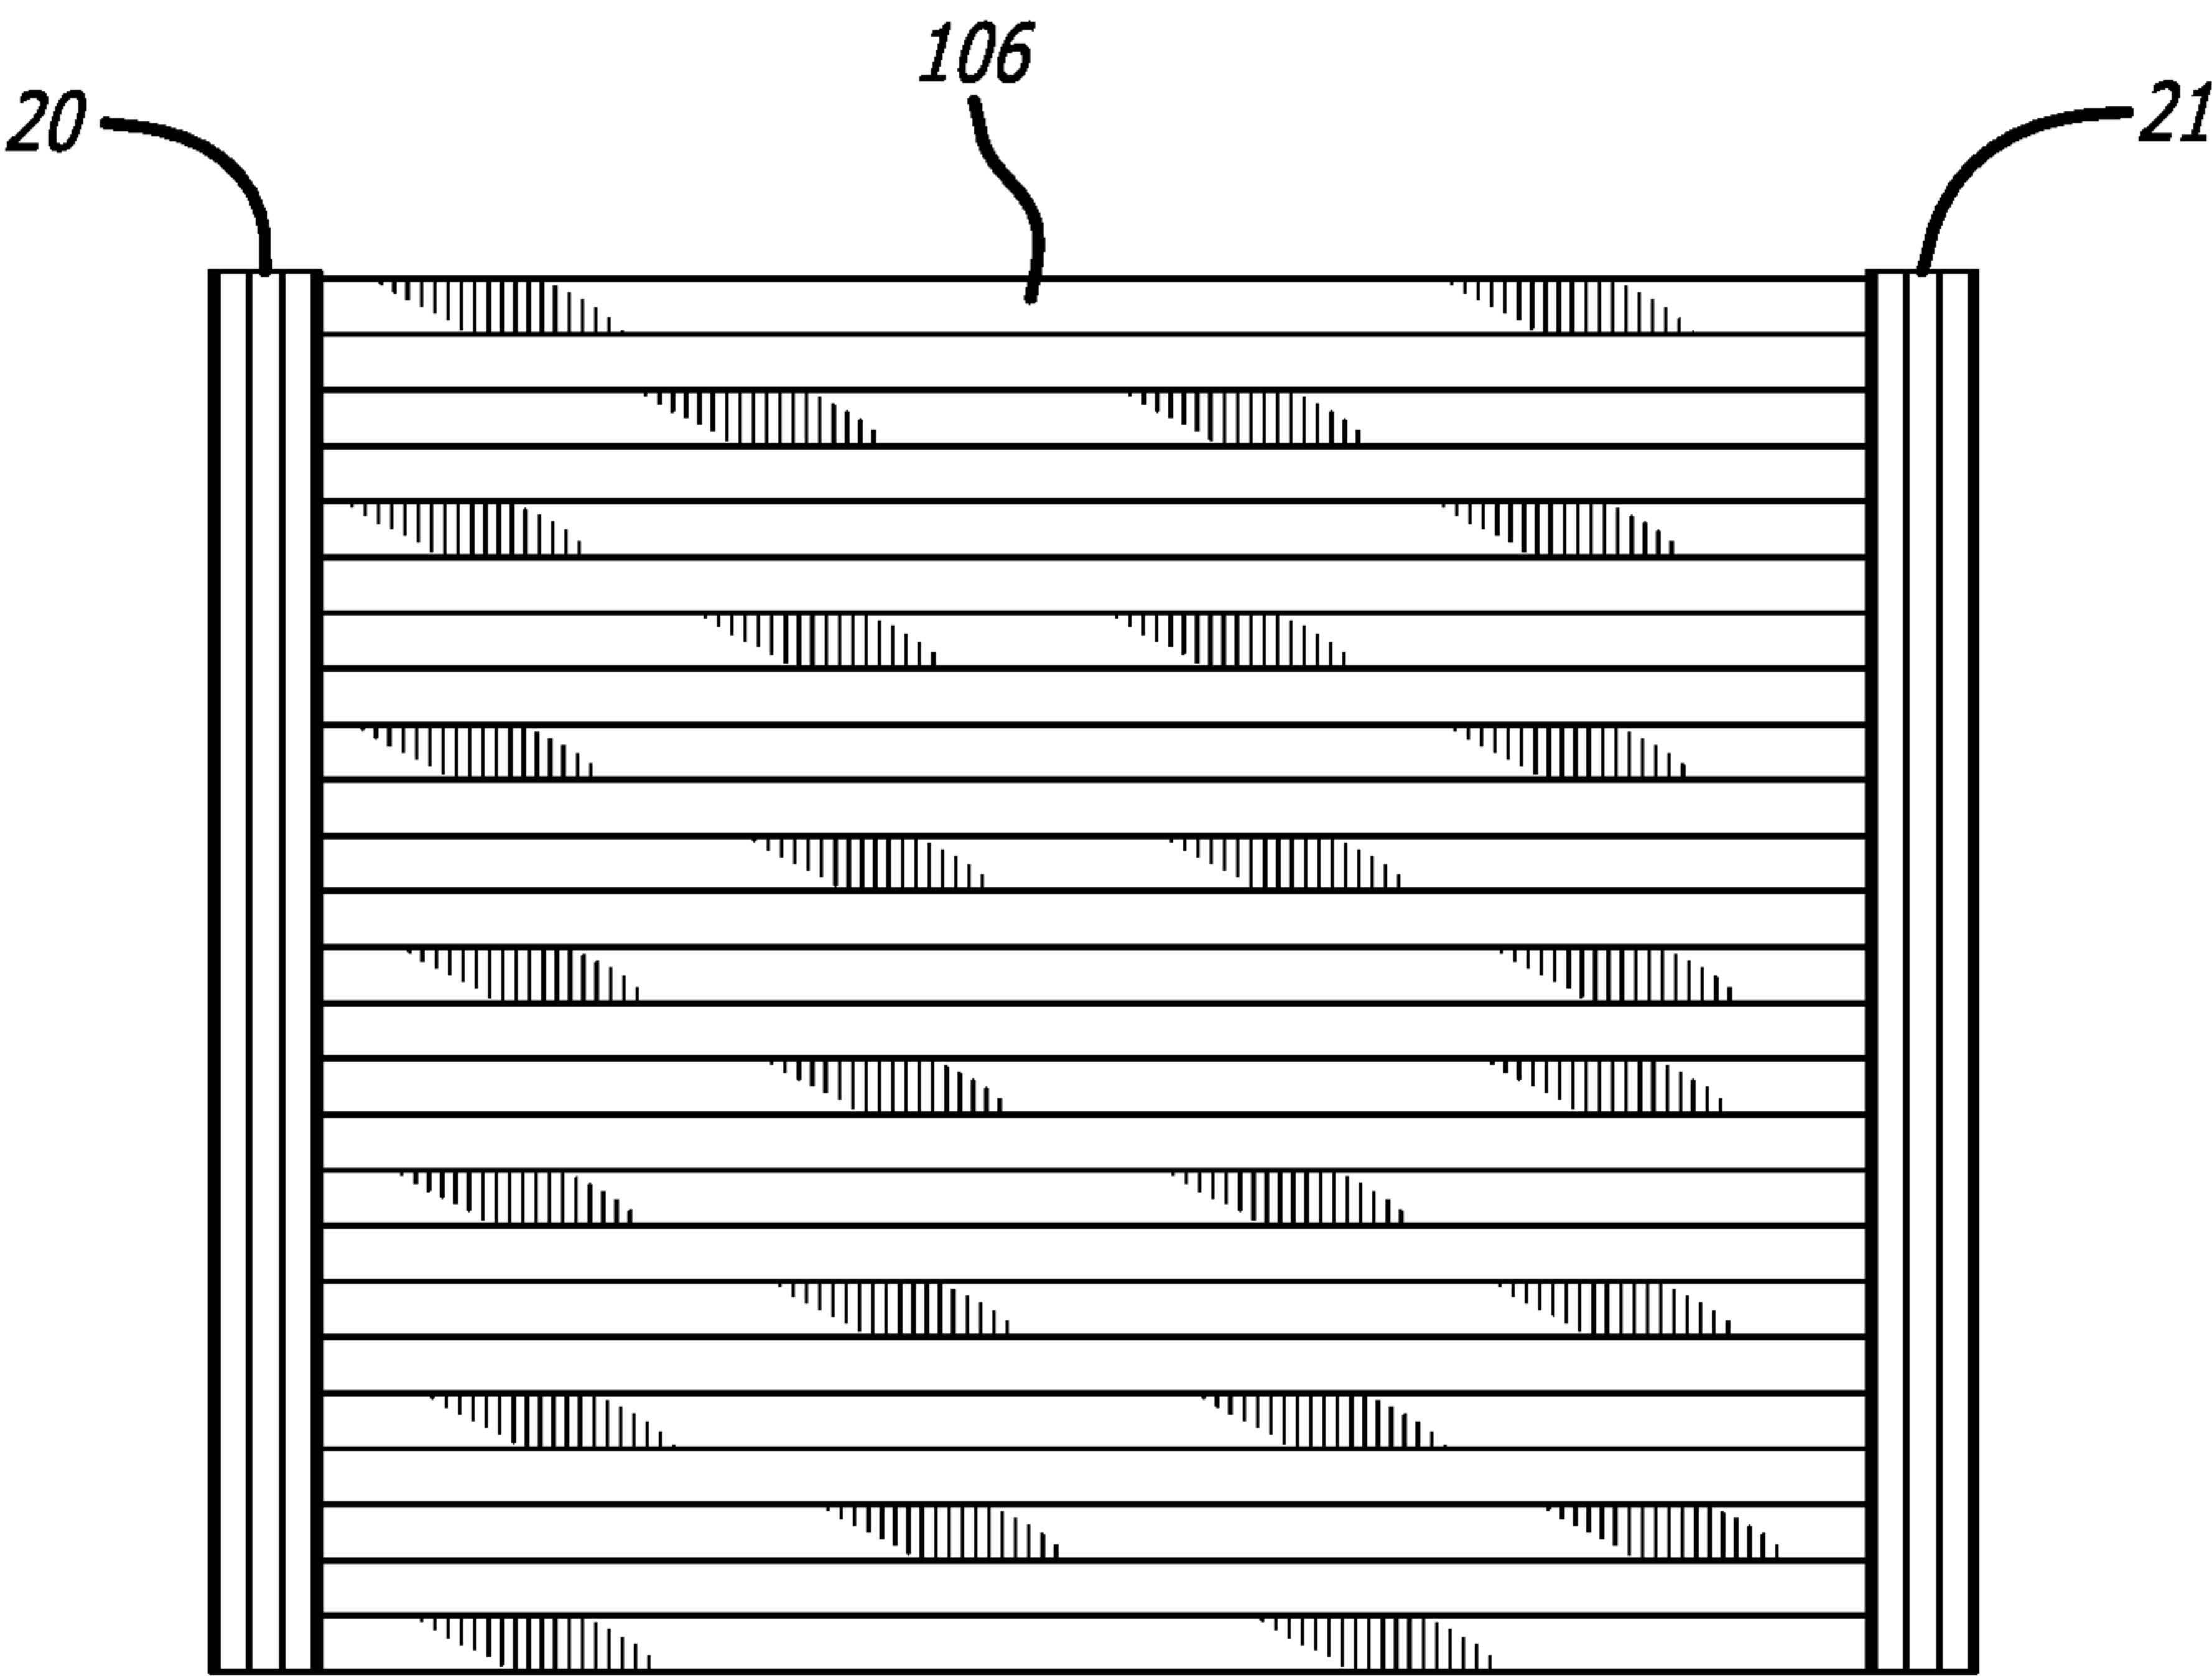


FIG. 7

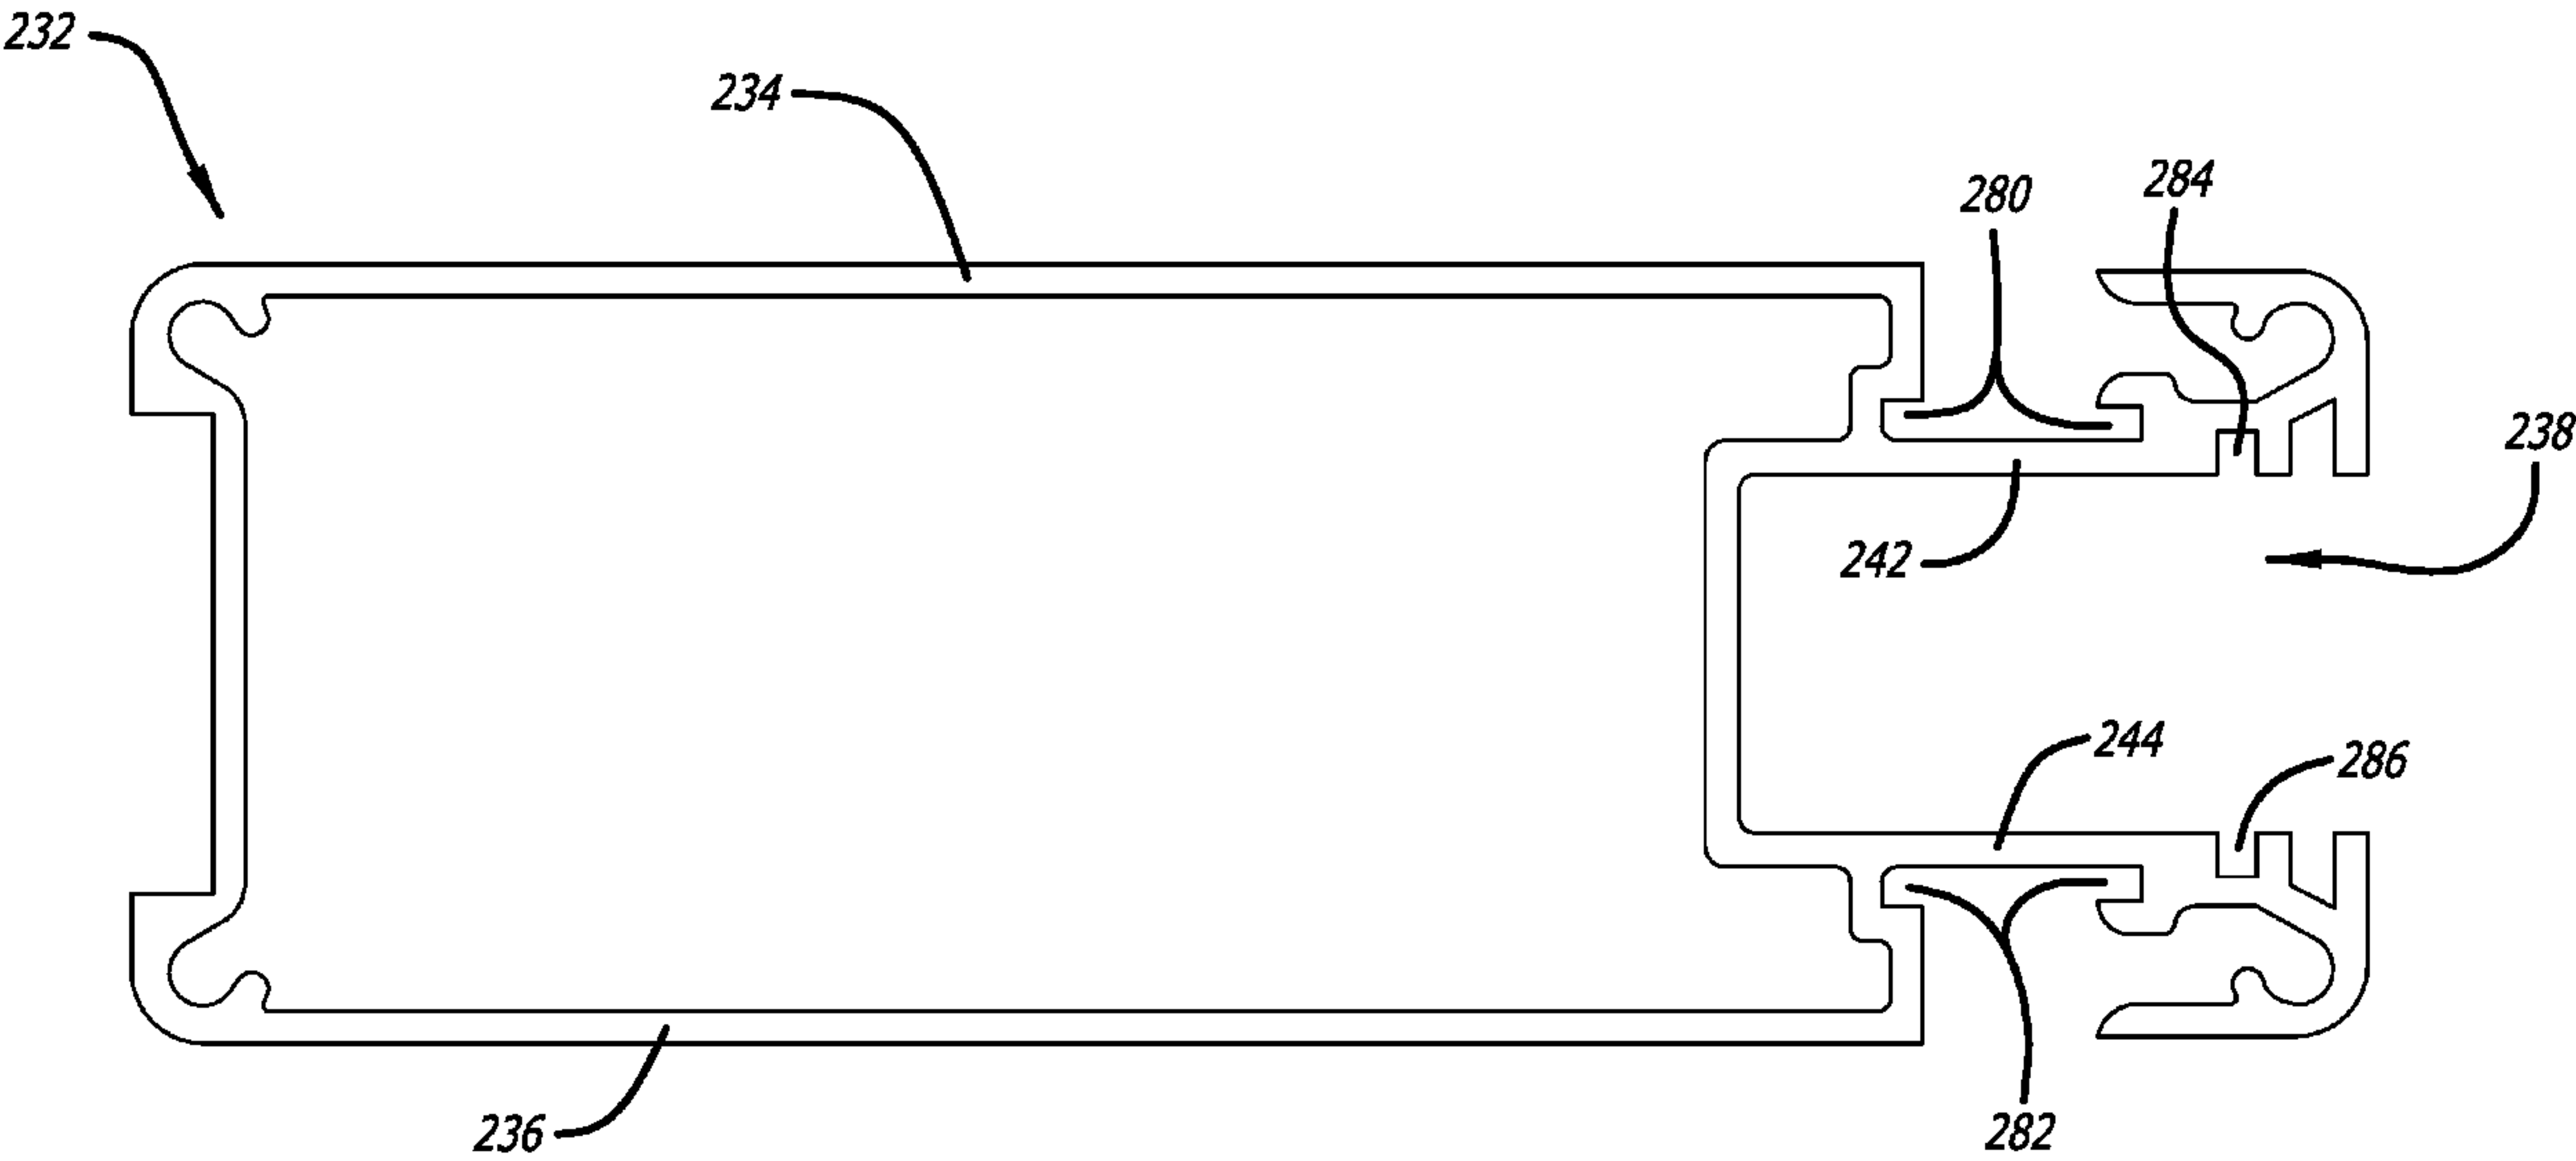


FIG. 8

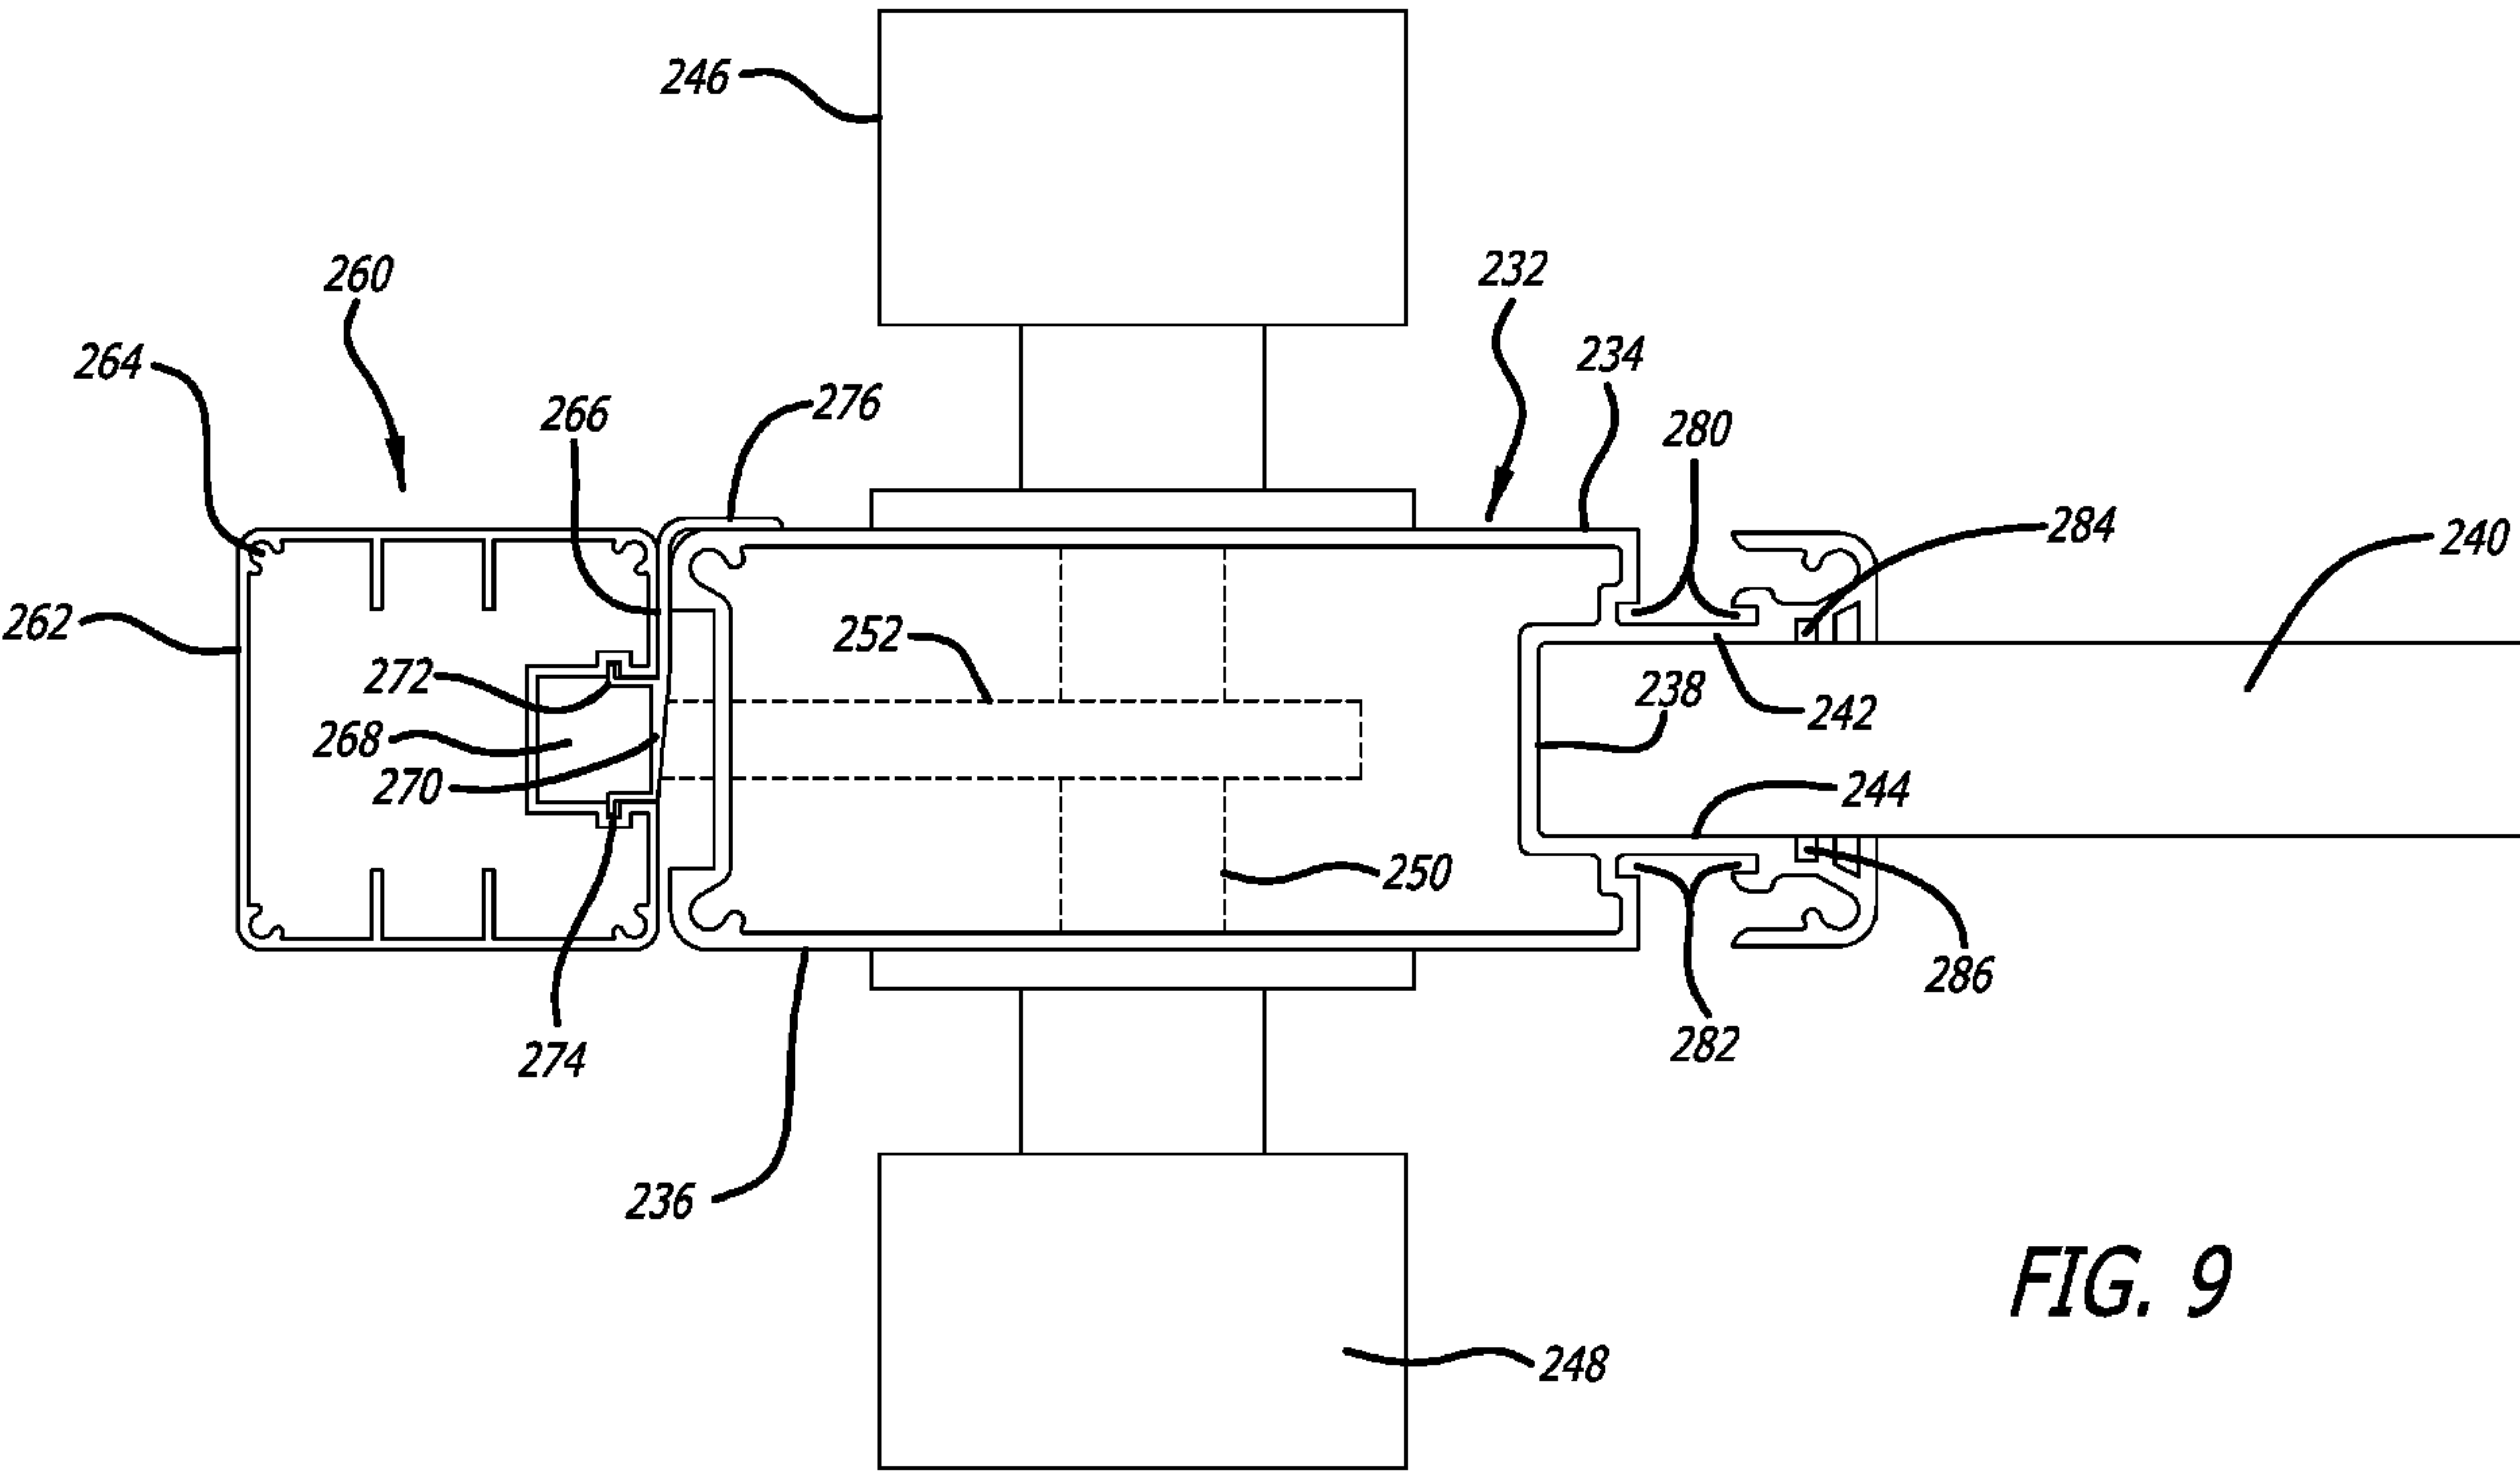


FIG. 9





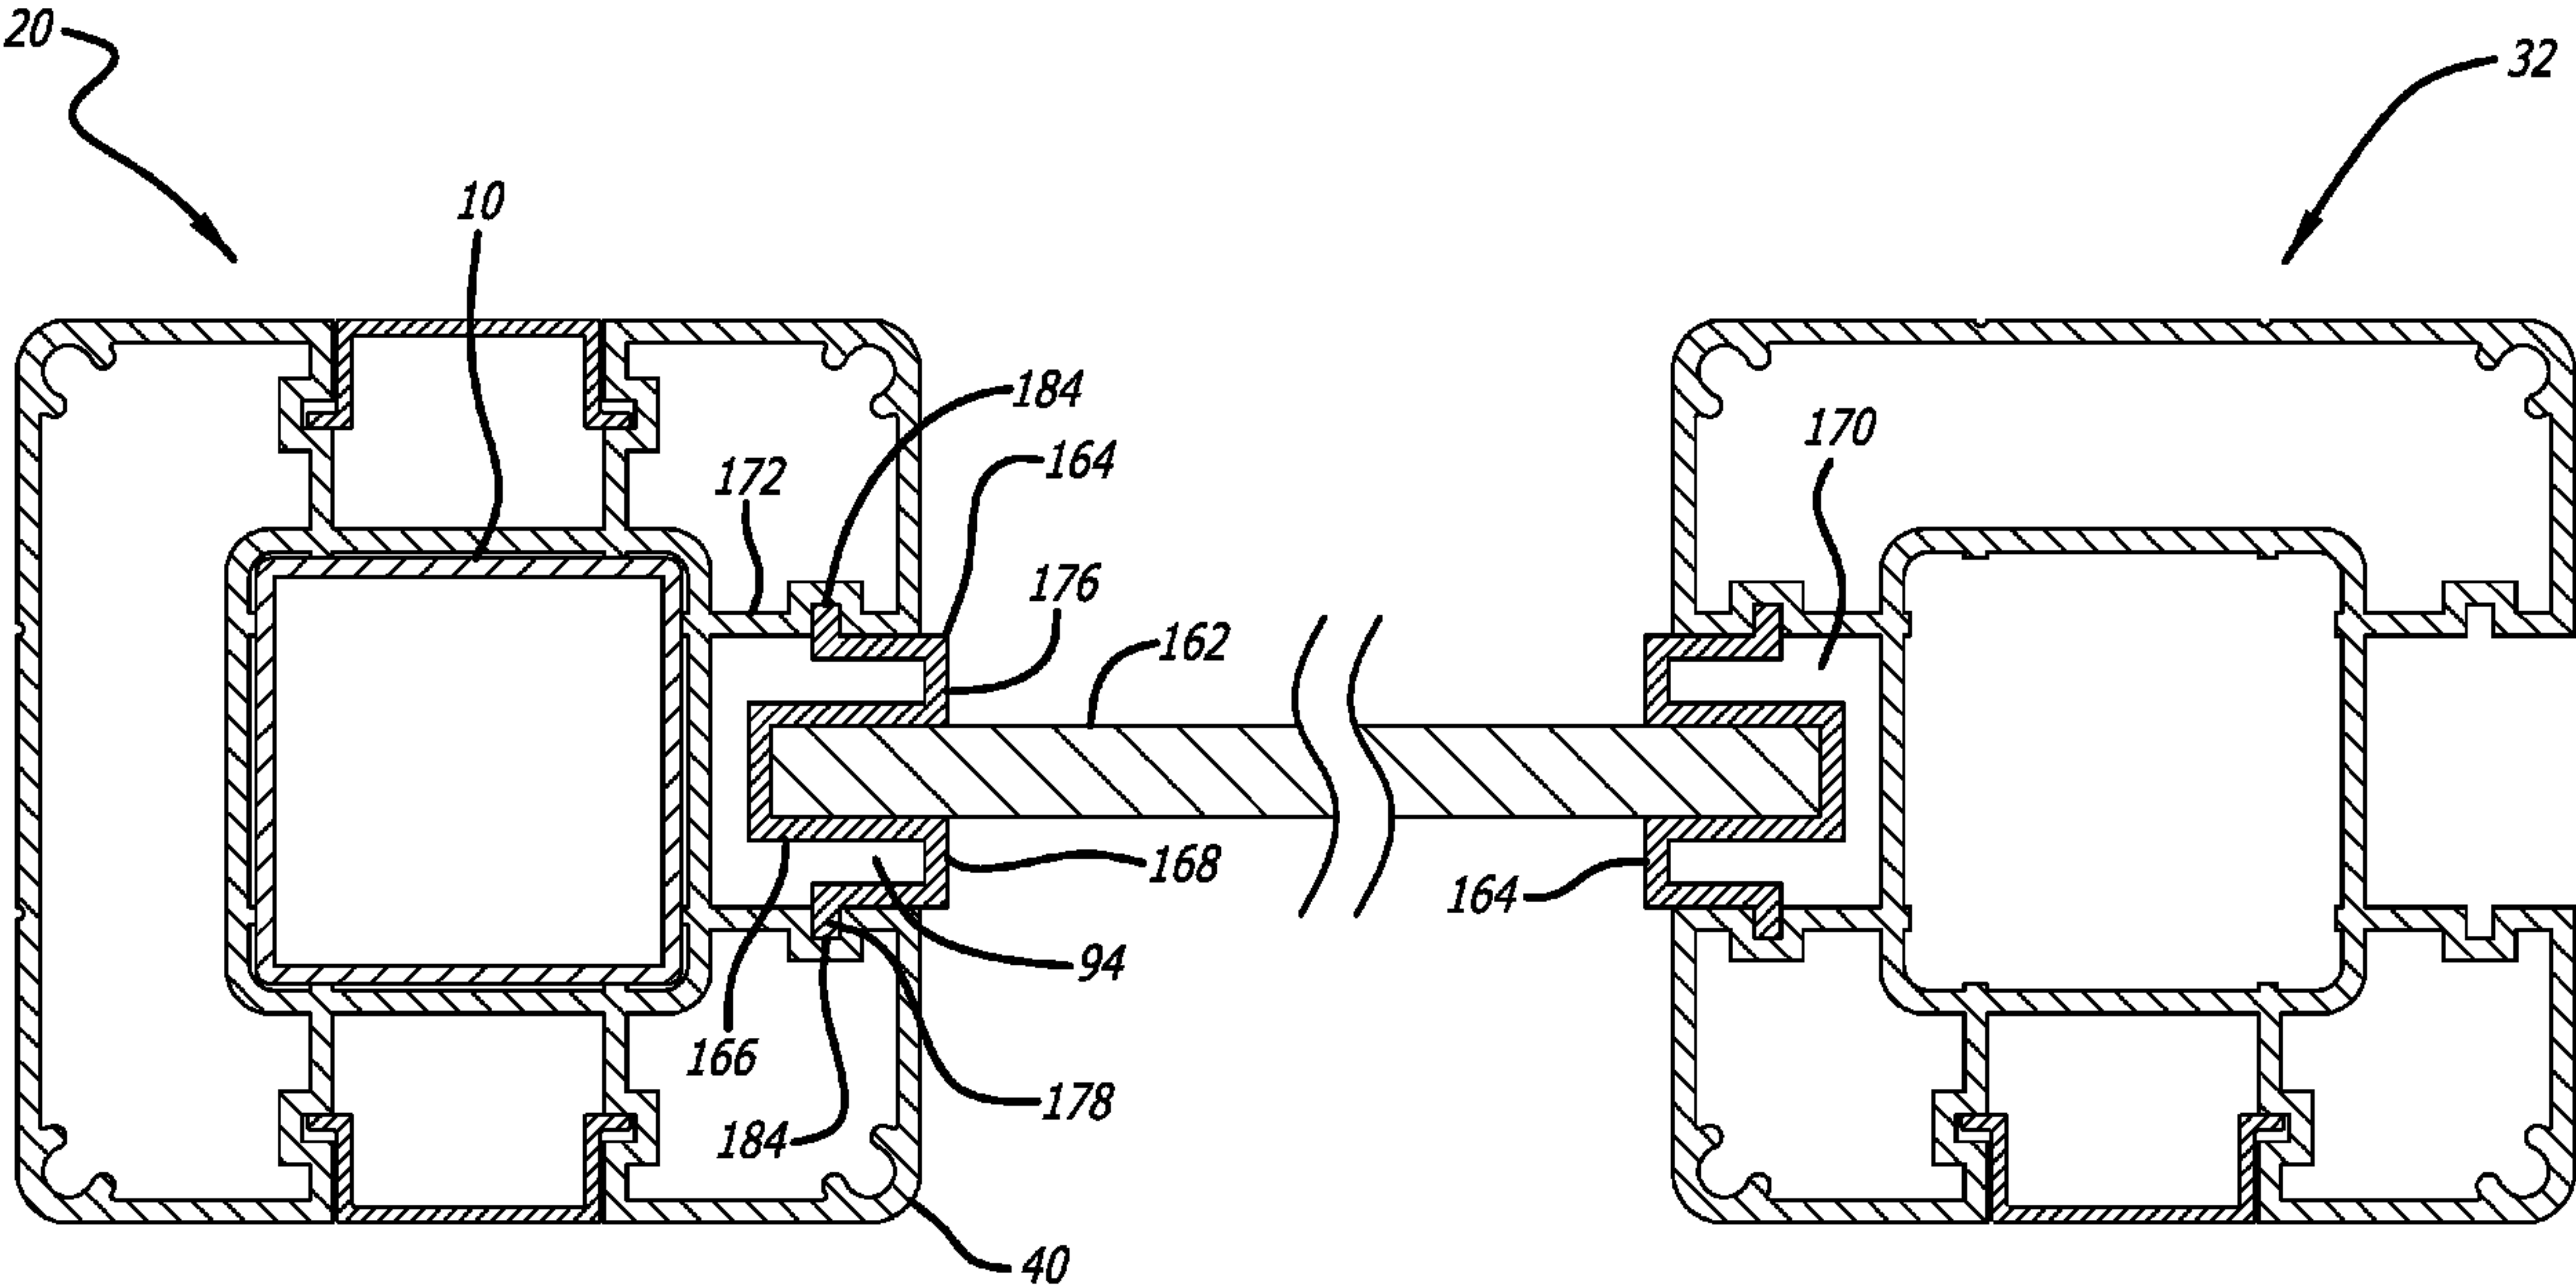


FIG. 11




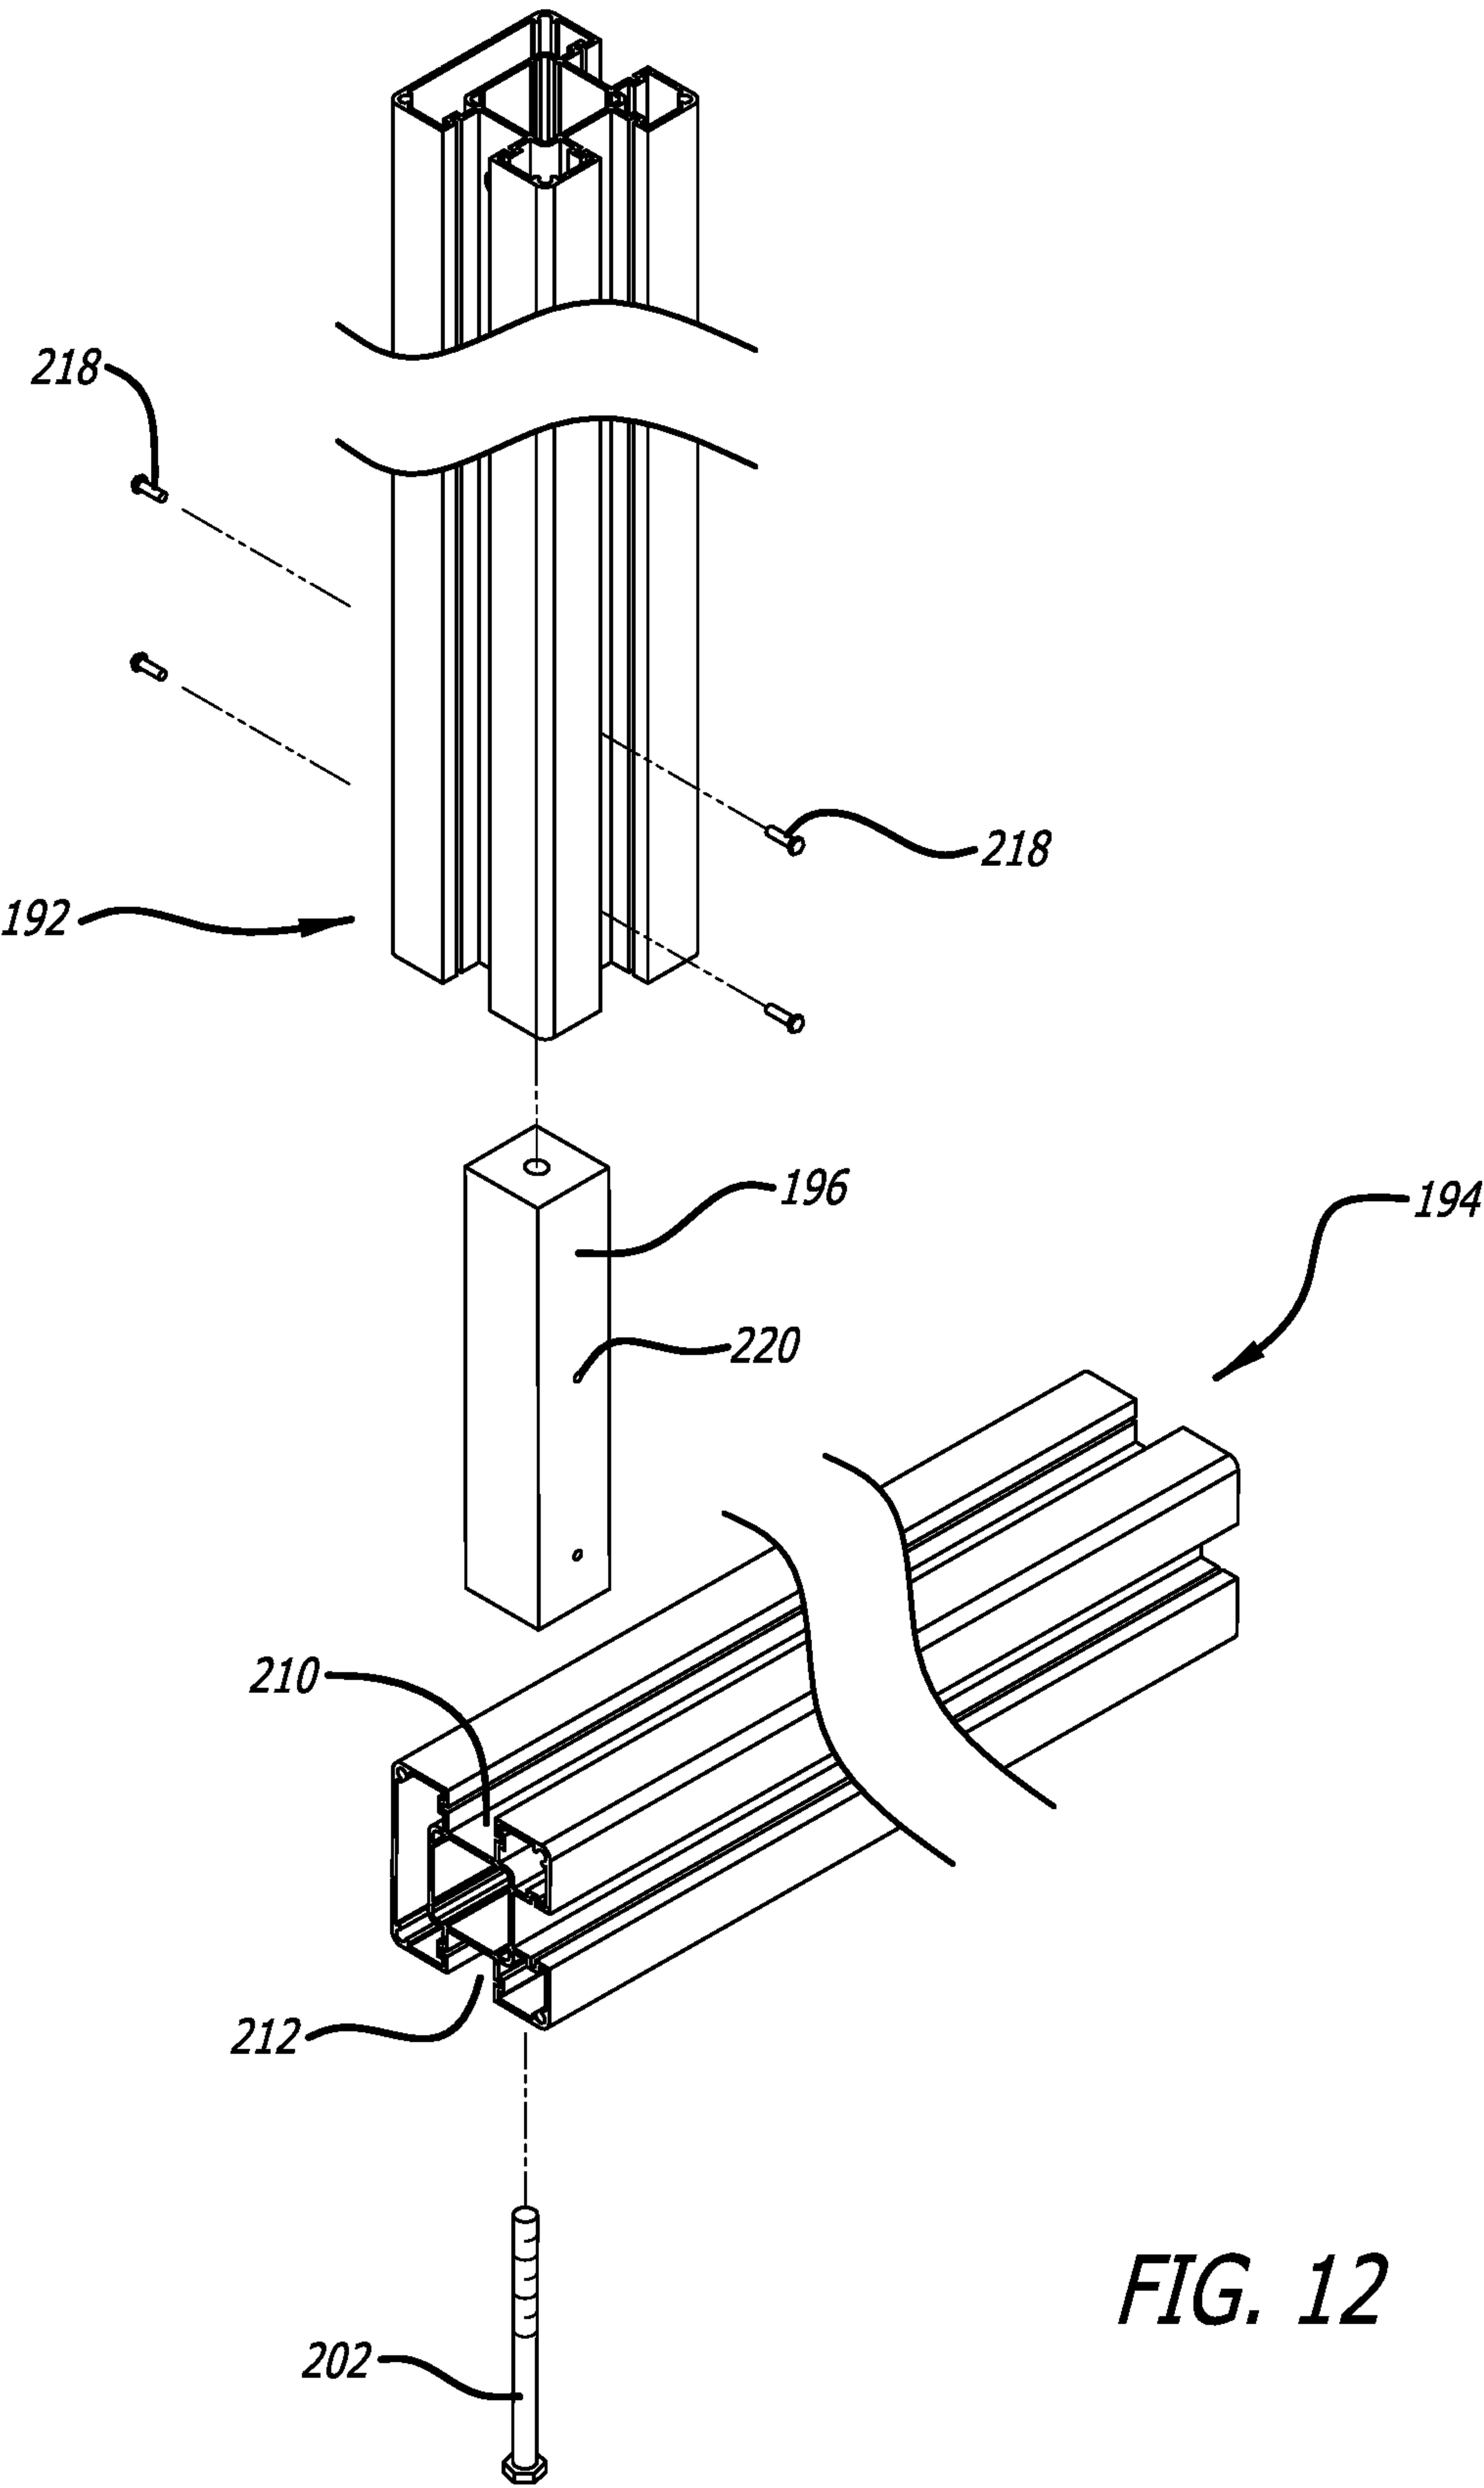


FIG. 12

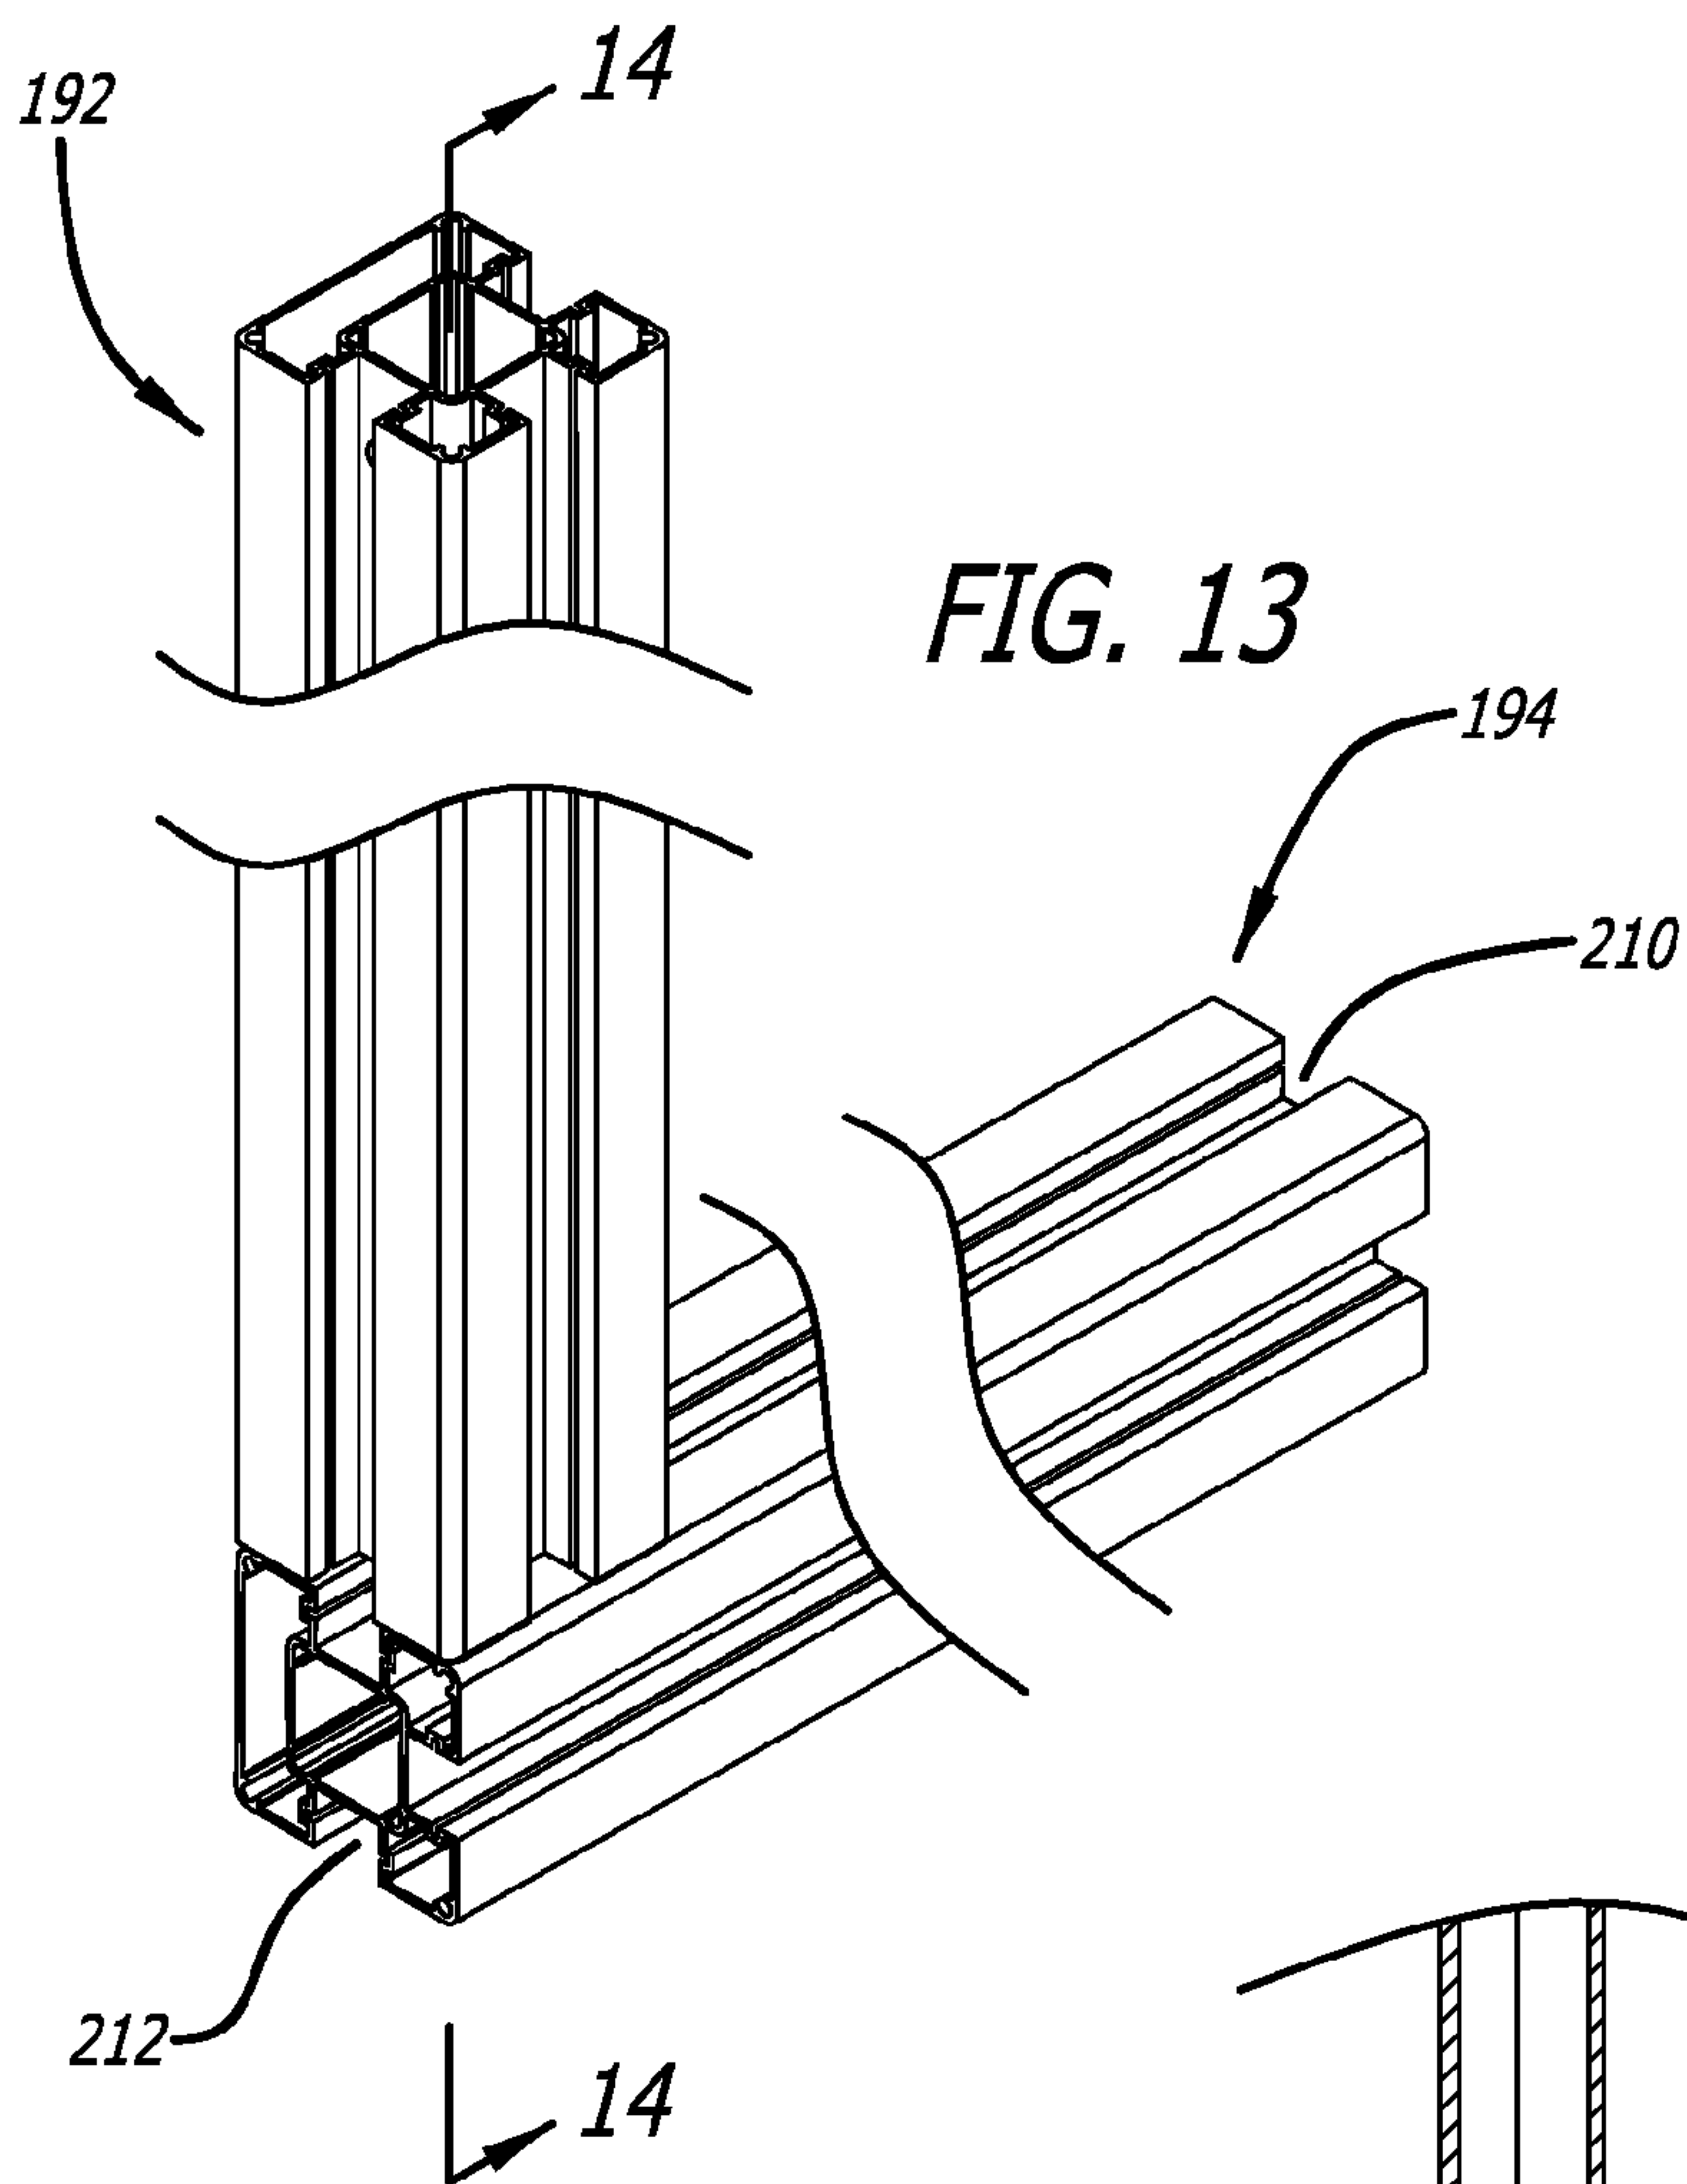

*FIG. 14*

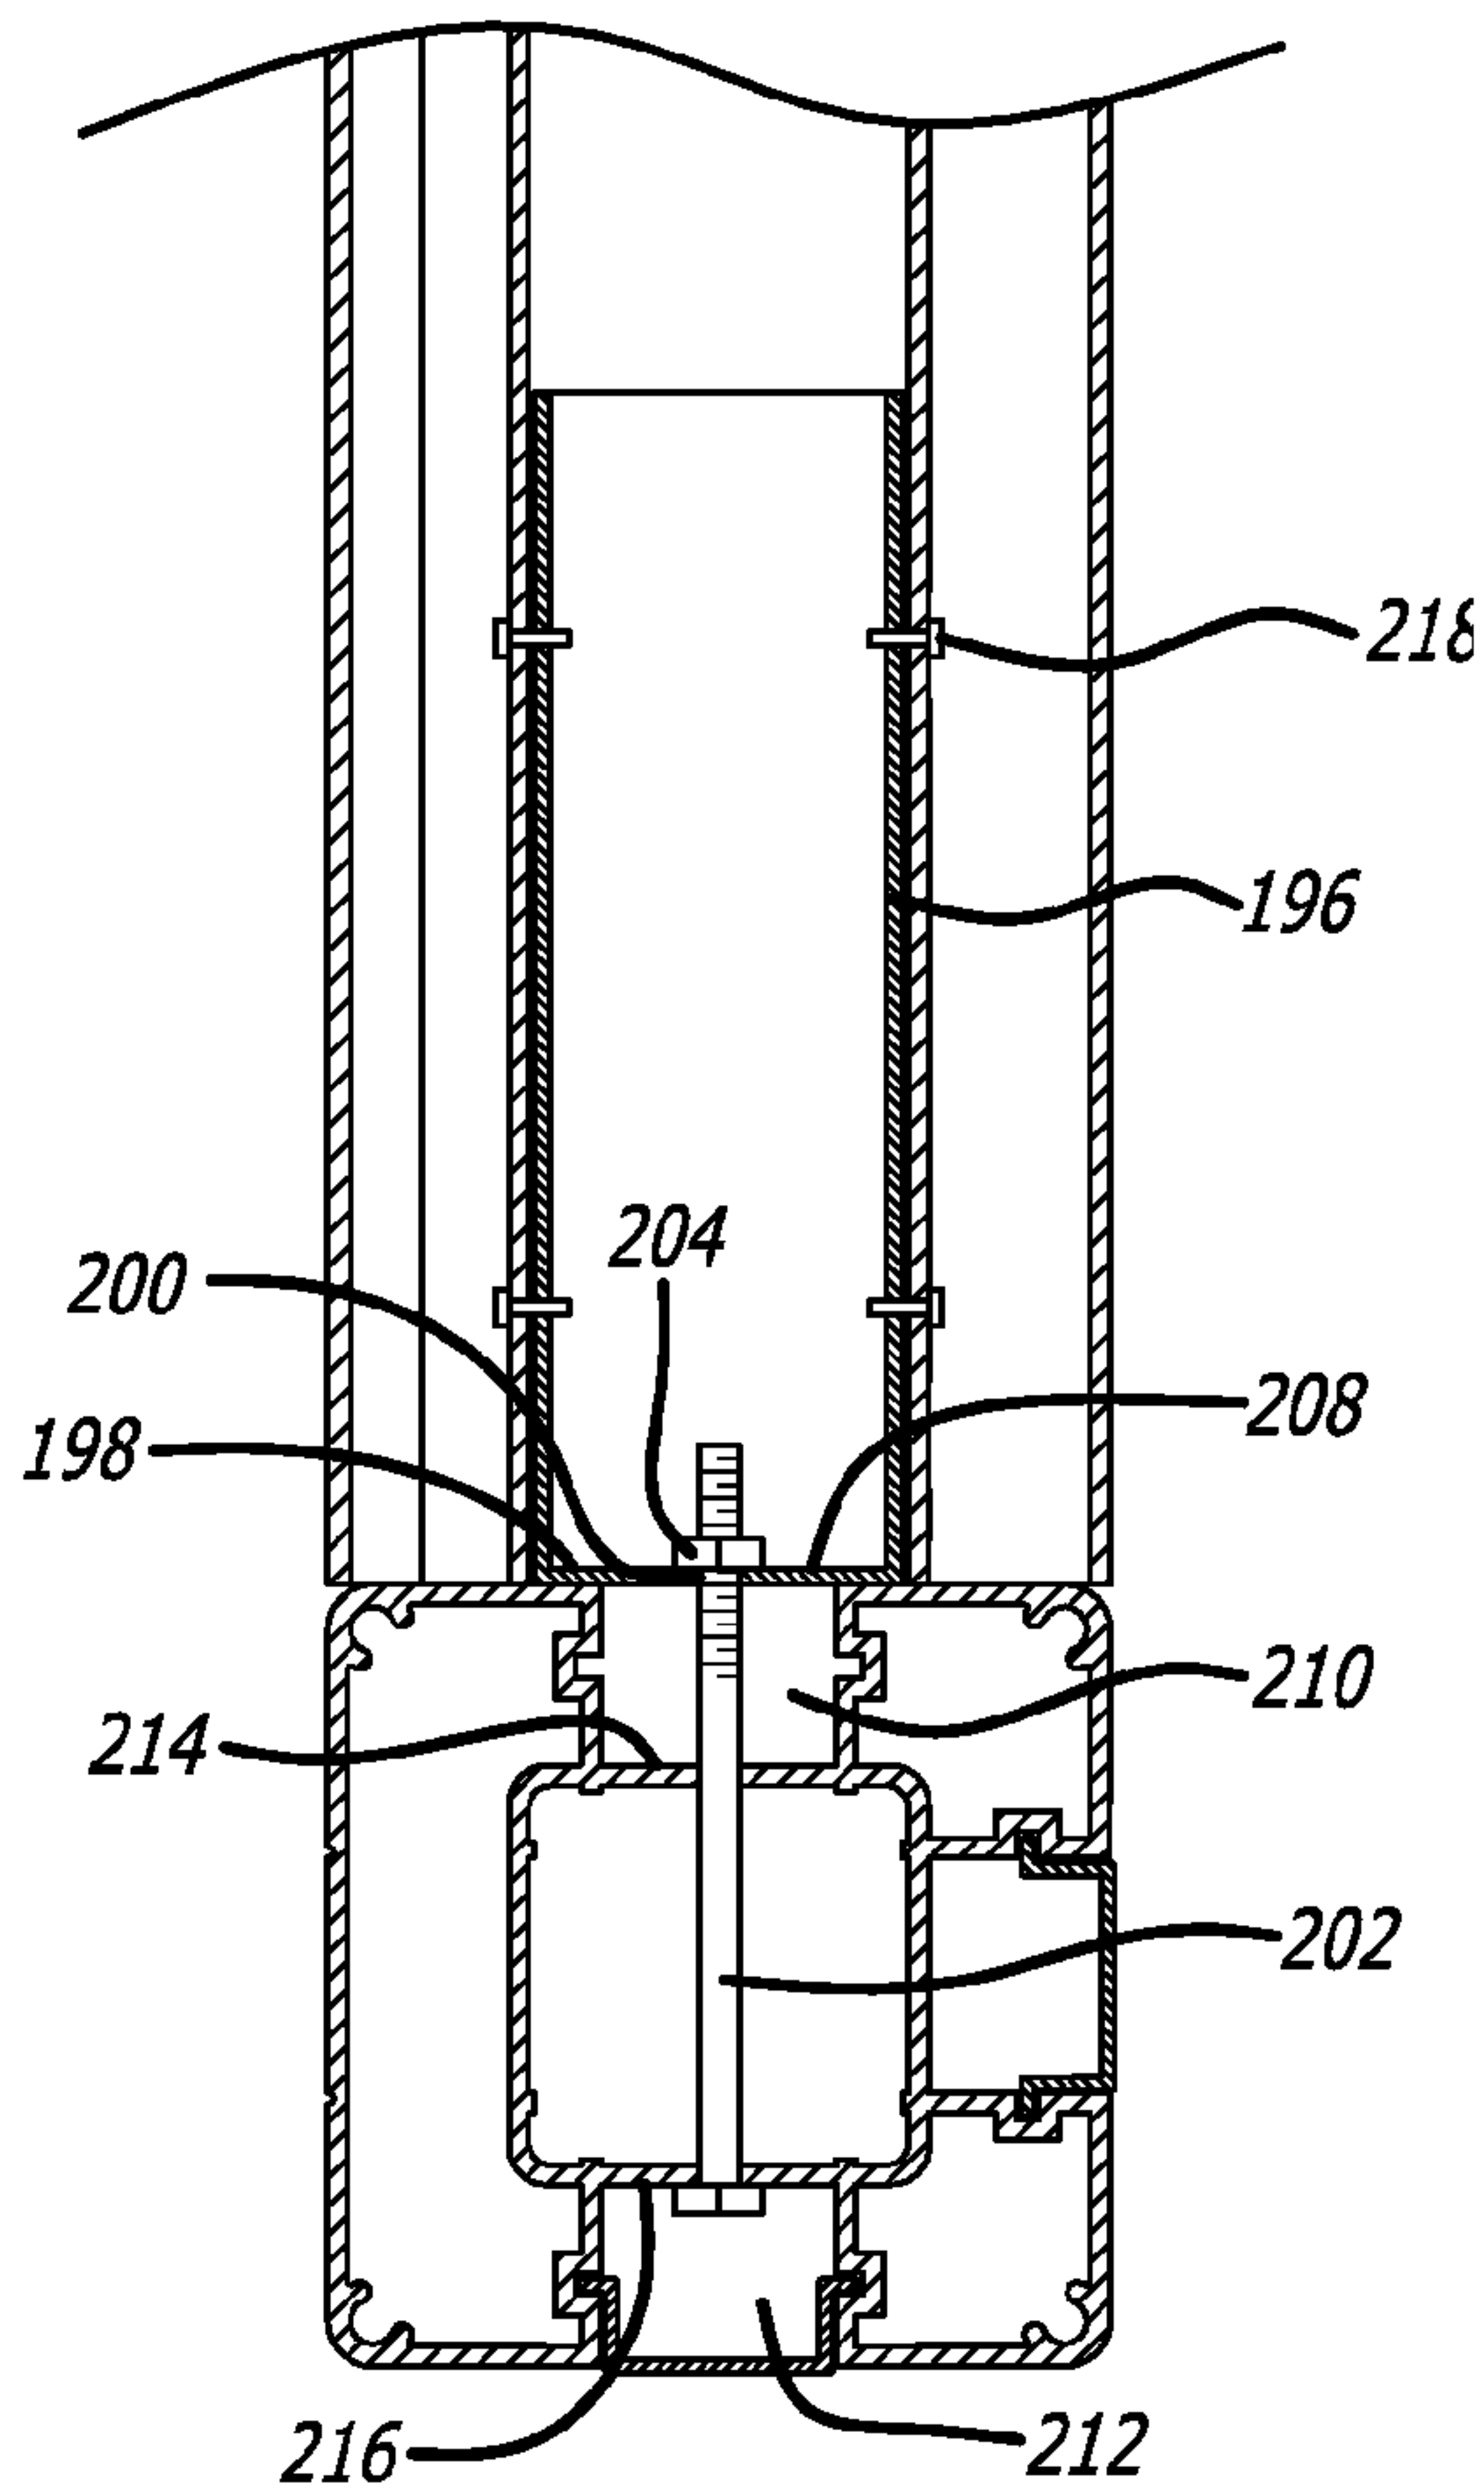

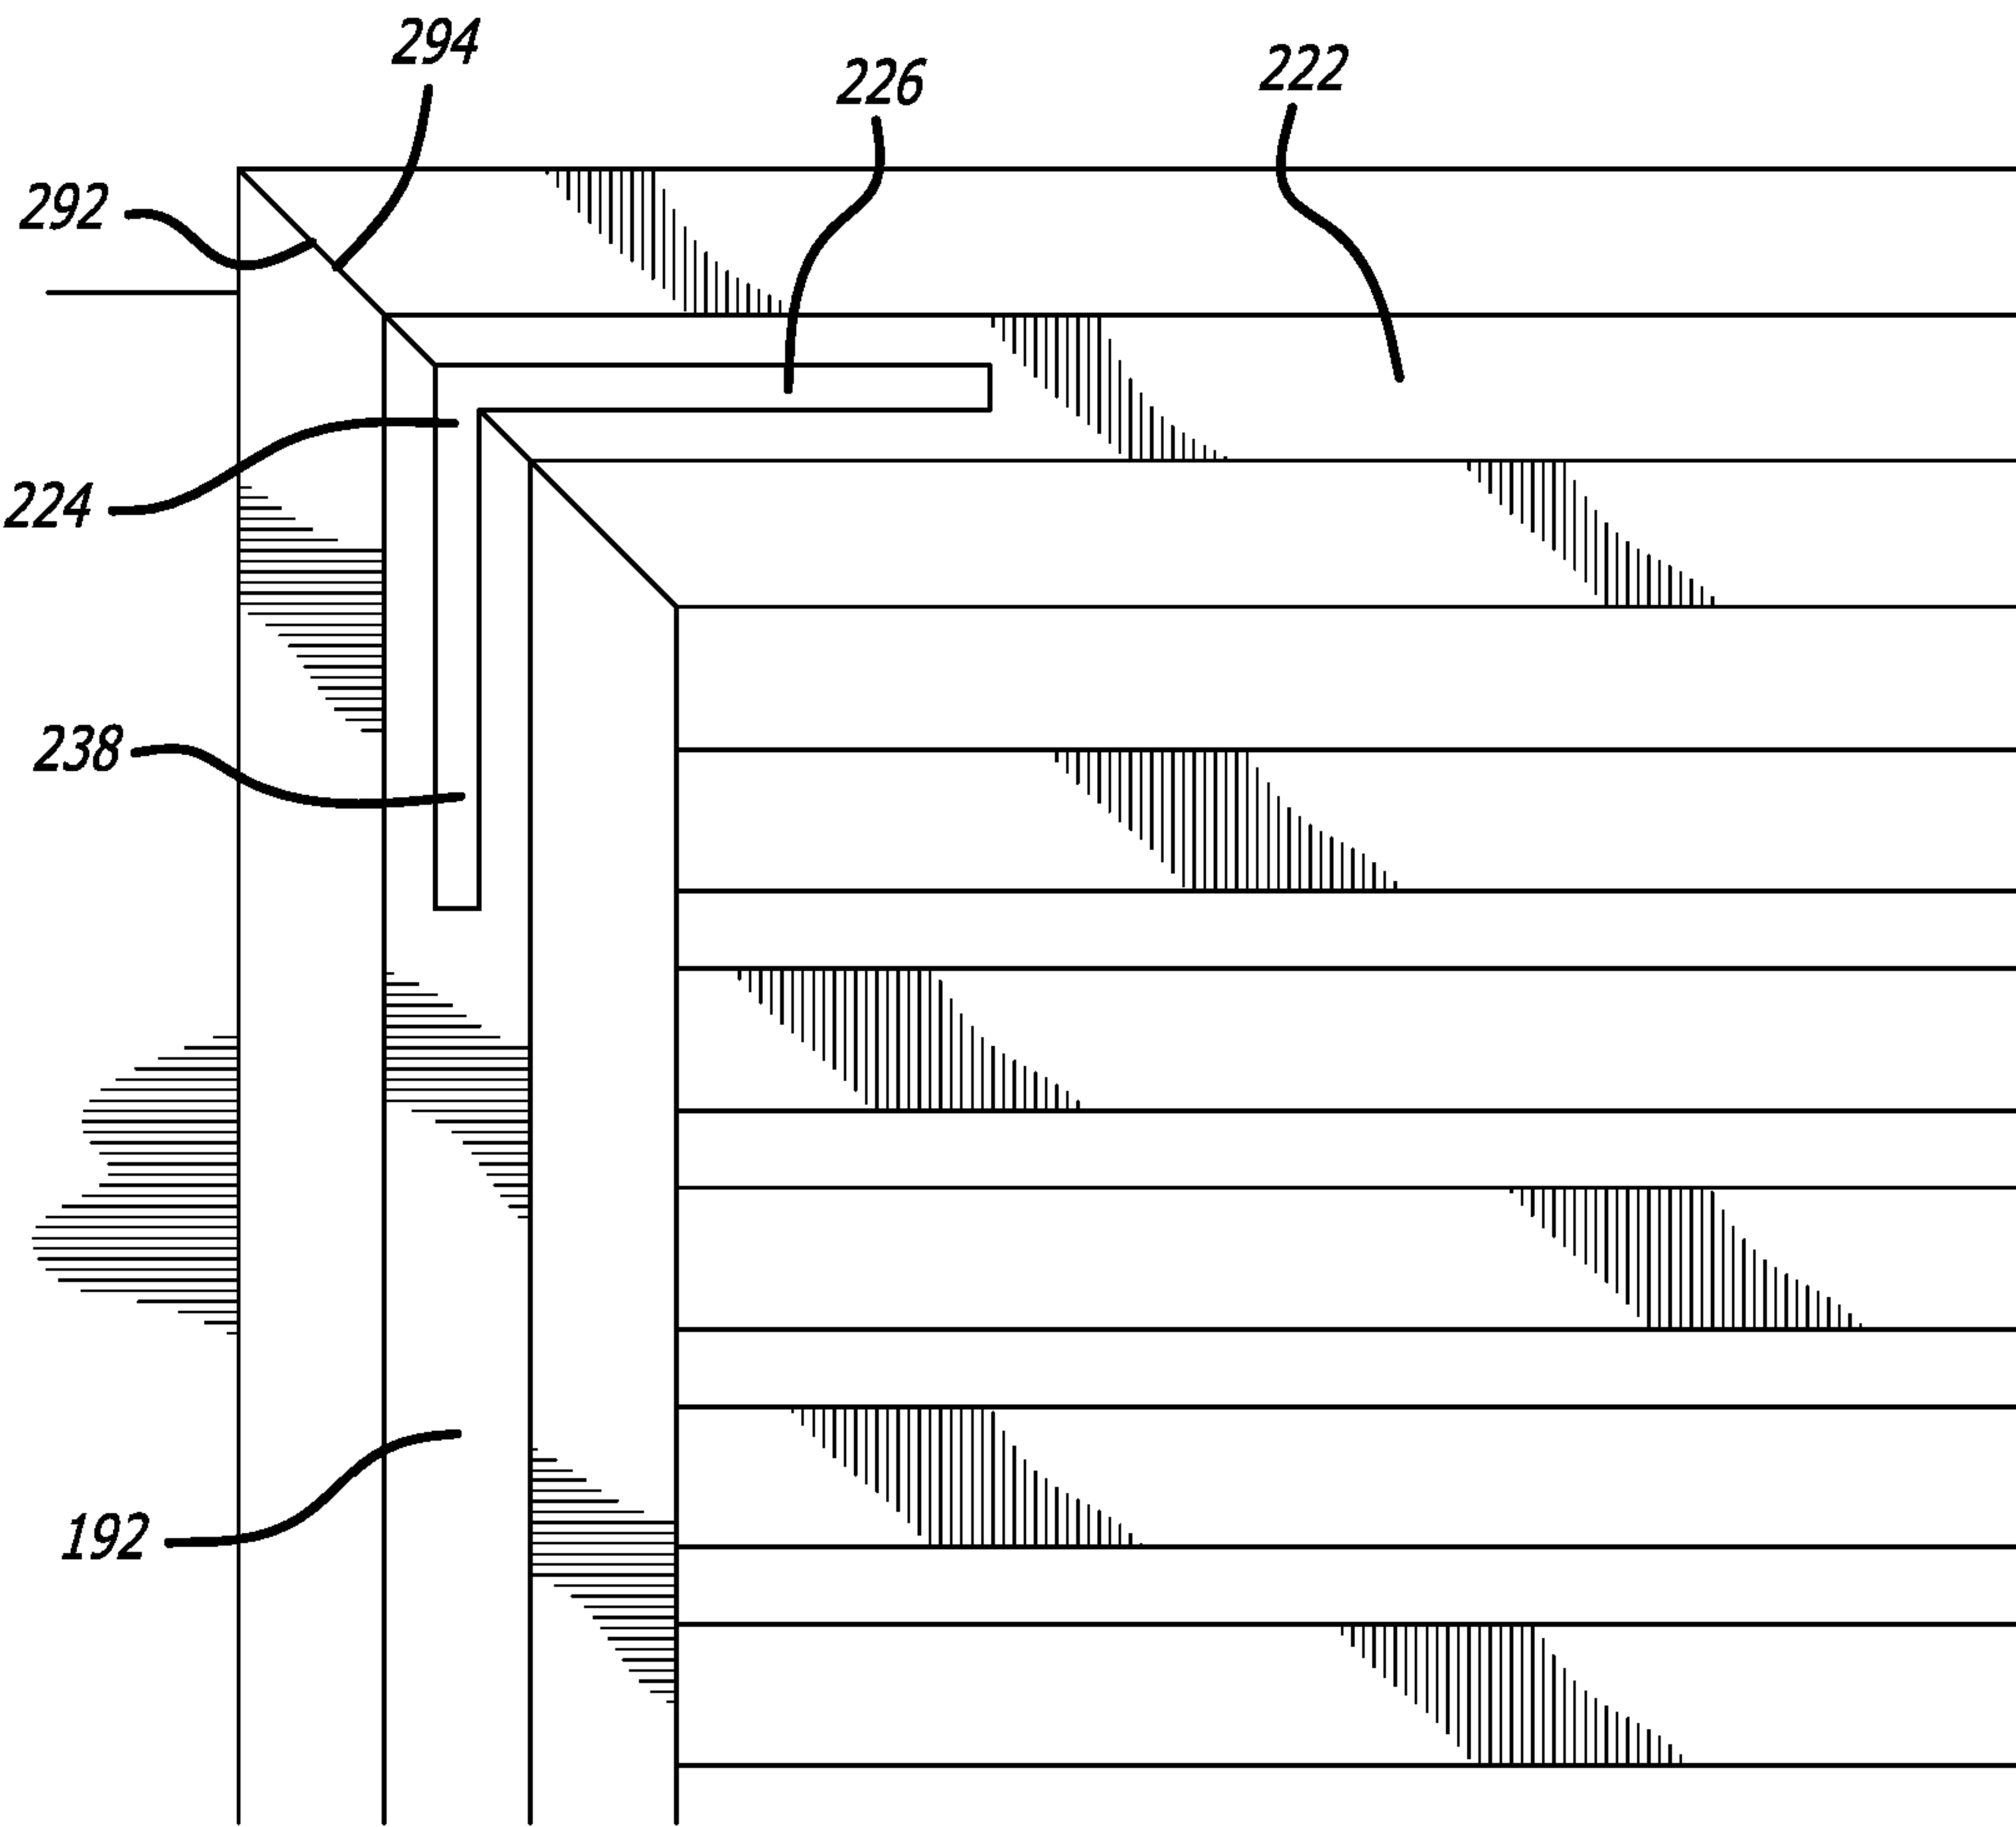

*FIG. 15*



## ALUMINUM FENCE SYSTEM

### NOTICE OF COPYRIGHTS AND TRADE DRESS

**[0001]** A portion of the disclosure of this patent document contains material which is subject to copyright protection. This patent document may show and/or describe matter which is or may become trade dress of the owner. The copyright and trade dress owner has no objection to the facsimile reproduction by anyone of the patent disclosure as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright and trade dress rights whatsoever.

### RELATED APPLICATION INFORMATION

**[0002]** This patent claims priority from Provisional Patent Application 63/296,126, filed Jan. 3, 2022, entitled ALUMINUM FENCE SYSTEM.

### BACKGROUND

#### Field

**[0003]** This disclosure relates to fencing systems and gates.

#### Description of the Related Art

**[0004]** Many types of residential and commercial fencing exist. One type is pre-cut wooden fence posts with and panels or slats. Installers using those systems may purchase a desired number of posts, sink them with concrete, attach them with crossbars, and nail the slats to the crossbars. These fences have a more rustic, rough-cut feel that some find unattractive for certain applications.

**[0005]** Wrought iron fencing is also common. It usually is sold in panels, but to fit in the perimeter of a property or yard, panels must be cut to desired lengths with an acetylene torch. Wrought iron also is heavy, about 0.28 lb./in.<sup>3</sup> though most components of wrought iron fencing are hollow and the pickets are spaced. Wrought iron fencing requires strong metal or brick posts to support them. Gates for wrought iron fencing usually are custom made and sized using a welder. Wrought iron becomes expensive because of the labor costs for a welder, the expense of sturdy posts, and the material and shipping cost of using iron. Wrought iron also is subject to rust and corrosion and needs regular painting especially in damp or rainy climates.

**[0006]** Chain link fence is widely available and inexpensive. It comes in rolls, and may be installed using standard posts and fittings. Many find chain link fencing unattractive, particularly for higher-end homes, and it often degrades and looks worse over time as fittings loosen, sections sag, and the bottom may become spaced from the ground.

**[0007]** One fencing solution for modern-style homes is fine-cut redwood or cedar fencing. The slats typically are installed horizontally between vertical posts, but the slats can be installed vertically. The slats may be arranged with wider slats and smaller slats interspersed with one another for aesthetic purposes. The support structure's posts usually are redwood or cedar, but they may be metal. The posts typically are sunk in concrete or fixed to existing concrete or structures. These fences can be attractive especially for modern homes, but they are labor intensive. To appear appropriately, the slats must be cut precisely. Fine-cut, pre-

sanded, and fine-grained redwood or cedar which are typically used is costly, three to five times the price of rough-cut fence slats. Though redwood and cedar resist weathering better than other wood, rain, snow, ice, and sunlight can still cause degradation so components must be replaced or at least periodically re-sanded and stained or painted.

**[0008]** Steel-based systems are said to mimic the shape and clean lines provided by the fine-cut redwood and cedar fences, but working with steel can be difficult. Steel must be cut with an acetylene torch, and a welder usually must attach the slats to steel posts and cross members. Steel slats may be painted and are strong but they can be heavy, difficult to install, and welding each member takes time and money for a professional welder.

**[0009]** Vinyl fencing systems exist. The vinyl fencing is easy to cut, simple to install, uniform in color (usually white), lightweight, and relatively aesthetically pleasing. However, vinyl stands up to heat quite poorly. The slats sag or fall out and usually must be screwed to a cross member or post. The connections between slats and posts often are visible. The slats themselves cannot be used alone for support because the vinyl is not sufficiently strong and rigid. So, support members are often included and spacing between posts must generally be closer than with metal-based systems.

### SUMMARY

**[0010]** Most components shown herein are made from powder-coated aluminum. Aluminum is lightweight, less than 0.1 lb./in.<sup>3</sup> (2.8 g/cm<sup>3</sup>), substantially less than iron or steel. The light weight allows the persons constructing the fence system to move the aluminum components easily. Shipping is likewise less expensive. The powder coat or anodization can come in many colors and designs. The components here are hollow so any comparison with other material such as wrought iron must account for parts being hollow. For the thicknesses applicant uses, the components can be cut using a conventional electric miter saw and remain strong enough to be placed without additional non-aluminum support.

**[0011]** The principal components are extruded 6063 alloy powder-coated aluminum. Anodized aluminum is another choice, but powder coating allows for more colors and designs. Several components including a fence column have a complex cross-section for which forming by extrusion is ideal, and the 6063 alloy is a suitable choice for extrusions though other alloys also may be suitable.

**[0012]** The fence system attaches to aluminum or steel rectangular base posts that attaches to a fence column. The inside wall of a fence column fits over the base post. The fence column also has an outside wall around the inside wall. Each of three side of the fence column has a slot wide enough to accommodate one end of the slats. A bracket attaches the end of the slat to the fence column to secure the slats in place and provide rigidity to the entire structure. Additional slats may be added adjacent to the slat above or below, and spacers may leave space between the slats. The slats may be the same height, or their heights can vary for aesthetic purposes. All slots have grooves so empty slots can receive a slot cover, and areas between spaced slats can receive covers sized to fit in the space between slats. The slot covers likewise provide uniform spacing between the slats and an overall aesthetic, clean appearance.



**[0013]** A plate covers the open end on top of the fence column, and self-drilling screws extend through apertures in the plate and secure the plate to the fence column's open end. Other plate covers attach to other open ends of fence columns or similar members used for other than a fence column. An adhesive secures a post cap to the top of the fence column and the plate.

**[0014]** The fence system also includes a gate, which may have two intersecting members: fence column (vertical) and platform (horizontal). The platform is at the bottom of the gate, and structure like the platform may be at the gate's top. The fence column and platforms may have the same extruded shape. A short post secures the fence column and platform together.

**[0015]** The horizontal platform is positioned with a slot open upward and a slot open downward. A bolt extends through a hole in the platform to a threaded opening in a short post within the fence column to secure the fence column to the platform.

**[0016]** An L-brace though the centers of the horizontal platform and the vertical fence columns could secure them together. To cover the intersection of the L-brace's horizontal and vertical sections, the adjacent ends horizontal platform and vertical fence column are cut at a 45° angle so they intersect at a right angle and cover the L-brace.

#### DESCRIPTION OF THE DRAWINGS

**[0017]** FIG. 1 is a perspective view of applicant's fence surrounding a building.

**[0018]** FIG. 2 is an exploded view of parts of applicant's fence.

**[0019]** FIG. 2A is an exploded view of parts of applicant's fence.

**[0020]** FIG. 2B is an exploded view of parts of applicant's fence.

**[0021]** FIG. 2C is an exploded view of parts of applicant's fence.

**[0022]** FIG. 2D is a sectional front view of applicant's fence through plane 2D-2D in FIG. 2C.

**[0023]** FIG. 3 is a sectional plan view of applicant's fence.

**[0024]** FIGS. 4-7 are front views of different slat arrangements of the fence.

**[0025]** FIG. 8 is a sectional plan view of a component of applicant's fence used as part of a gate.

**[0026]** FIG. 9 is a sectional plan view of components of applicant's fence used as part of a gate.

**[0027]** FIG. 10 is a perspective view the door structure of applicant's fence.

**[0028]** FIG. 11 is a sectional plan view of a section of applicant's fence with a thinner slat like a glass slat.

**[0029]** FIG. 12 is an exploded, perspective view showing a connection between two fence columns connected at right angles to each other.

**[0030]** FIG. 13 is a perspective view with the two fence columns connected at right angles to each other

**[0031]** FIG. 14 is a sectional plan view of structure for applicant's fence through plane 14-14 of FIG. 13.

**[0032]** FIG. 15 is front view of a top corner of applicant's fence with an internal bracket.

#### DETAILED DESCRIPTION

**[0033]** Overview: Applicant's fence system 2 surrounds or partially surrounds property 4 (FIG. 1). The fence sys-

tem's fence column 20 attaches to steel or other metal square, rectangle, or polygon base post 10 (FIGS. 2, 2A-2D, 3, 11). Those figures also show the structure of fence column. Having a base post with the same shape as the base post prevents or limits pivoting of the fence column about the base post. The base post could be round, but that would require a different inside shape of fence column 20, but a round-to-round connection may allow the fence column to pivot about the base post. Though the specification uses "rectangle," the word encompasses the other shapes. But the drawing show a square or nearly square base with rounded internal and external corners.

**[0034]** Base post 10 can attach to concrete, deck, soil, or to the top of a brick, block, or concrete wall. The base post may be painted or treated to resist corrosion or rust. Base post 10 in FIGS. 2, 2A-D attaches to concrete or a deck 2. The base post in the figures is 1.25 in. (3.175 cm) x 1.25 in., but opposite walls may be elongated slightly. Conversions between English and metric are approximated. The base post may have outer flange 12 with screw openings 14 (FIGS. 2, 2A, 2D). Bolts (not shown) secure the flange to concrete. The bolts may extend upward from the concrete when the concrete is poured. Then nuts secure the flange to the bolt and concrete.

**[0035]** Cover 16 slides over the base post. The inside wall of a fence column slides over the base post (FIGS. 2, 2A-2D). The cover hides the outer flange and bolts for a pleasing appearance.

**[0036]** To mount the base post on soil, an 18 in. to 24 in. (46 cm to 61 cm) hole is dug. After concrete is poured into the hole, the base post is pushed into the soft concrete and plumbed to be vertical. Whether base posts 10 are in concrete or soil, the base posts are aimed to account for the path of the fence system.

**[0037]** Connection of slats to fence column: Fence slats 100 extend between fence columns 20 around property 4 (FIG. 1). The fence column (FIG. 3 and others) has a base post receiver, inside wall 22, around base post 10. The inside wall has four sides 24, 26, 28, and 30 (FIG. 3). Adjacent inside walls meet at a 3.4 mm (0.13 in.) outside radius. The inside spacing between walls 24 and 28 is 33 mm (1.3 in.), and the inside dimension between walls 26 and 30 is 34 mm (1.3 in.). Inside wall 22 is almost square to fit with the base post 10. The thickness of the aluminum components may vary, but it typically is 1.78 mm (0.07 in.).

**[0038]** Screws, other fasteners (not shown) or an adhesive may secure the base post to the inside wall, but friction may suffice. See also projections 34 on inside wall 36 of the other fence column 32 (FIG. 3). Those projections are small enough to allow the base post to pass into the inside wall but the productions deform when the base post is inserted in inside wall 36 to push against the base post and hold the base post within the inside wall. Fence column 32 on the right side of FIG. 3 does not show a base post within inside wall 36.

**[0039]** Fence column 20 also has outside tubular member 40 attached to and spaced outside of inside wall 22 (FIGS. 2, 2A-2D, 3, 11). Because fence column 20 is extruded, "attached" in the context of the fence column means components are in contact or in such near contact that the aluminum maintains the components' positions with each other. The outside tubular member includes base member 42 with first and second ends 44 and 46 (left side of FIG. 3). The distance between the ends is greater than the length



of inside wall **30** (FIG. 3). The base member's width may be 70 mm (2.8 in.) versus 33 mm (1.3 in.) for inside wall **22**. End walls **50** and **52** continue from end **44** and **46** and then continue as sidewalls **56** and **58** to intersect fourth and first inside walls **30** and **24** (FIG. 3).

[0040] Three-sided pillars **60** and **62** extend outward near corners **64** and **66** of inside wall **22** (FIG. 3). Open-ended gaps like gap **76** are at the outside corners of pillars **60** and **62**. Depending on the location of the end of fence column **20**, the gaps receive self-drilling screws **156** for holding cover plate **48** at the top of fence column **20** (FIG. 2). Gaps **78** and **80** on the ends of outside tubular member **40** perform a similar function. Silicone or other adhesive attaches pyramid cover **54** above cover **48** (FIG. 2) to keep water, debris, and insects out of fence columns **20**. Cover **48** and pyramid cover **54** may be attached to exposed ends during construction to keep rain or dirt outside the fence column **20** or other appropriate components.

[0041] The sizes and positions of outside tubular member **40** and three-sided pillars **60** and **62** create three slots **90**, **92** and **94** (FIGS. 2, 2A-2D, 3). The slots are sized to receive one end of one or more elongated slats such as slat **100** received in slot **94** (FIGS. 2D, 3, 9, 10). The slots' width dimension are wide enough to accommodate one end of a slat like slat **100**. Additional slats may contact the slat below, or the slats may be spaced from adjacent slats.

[0042] Slats **100** may be powder-coated aluminum, which can be cut to length with an electric miter saw. Each slat's width may be 20.6 mm (0.8 in.). The height of each slat may be 140 mm (5.5 in.), 50 mm (2 in.) or another height. The slats in the drawings are rectangular in cross-section and a height **102** that may exceed its width **104** (FIG. 2B).

[0043] Stainless steel, L-shaped fasteners **110** and **114** and their associated stainless steel, self-driving screws **116** and **118** through wall **26** secure slat **100** to wall **26** at the inside end of slot **94** (FIGS. 2, 2B, 2D). Stainless steel screws work well securing parts like the L-shaped fasteners into the aluminum slats and fence column **20**.

[0044] Each sidewall of slots **90**, **92**, and **94** has opposing grooves **130**, **132**, **134**, **136**, **138**, and **140** (FIGS. 2, 2A-D, and 3) formed during extrusion. Slot covers such as covers **142** and **144** cover unused slots in the fence member (FIGS. 2B, 3). Each slot cover has an outside wall **146** and two sides **148** and **150**, each with a distal shoulder **152** and **154**. The distal shoulders are sized to fit in their respective groove like groove **130** (FIGS. 2, 2A-2C, 3). When the distal shoulders at the bottom of the slot cover are inserted into the grooves of a slot, the slot cover can be glided through its grooves to cover its empty slot. Though the structure uses grooves in the slots for the slot covers, when the slot cover reaches its final position, they may be fastened with an adhesive or in other ways at their positions in the slots.

[0045] The slats extend from one fence column **20** to adjacent fence column **32** (FIG. 3). With the three slots **90**, **92** and **94** (FIGS. 2A-2C and 3), the fence system is not limited to a straight line. In FIG. 3, for example, slat **100** extends from slot **90** of fence column **20** into slot **170** of fence column **32**. Another slat, **98** extends from slot **186** in the same general direction as slat **100**. Slat **98** also could extend from slot **188** at a right angle to slat **100**. Turning fence column **32** 180° extends slot **188** in the opposite right angle in FIG. 3.

[0046] Increasing the slots' widths slightly may allow changing the angles that the slats, e.g., **98** and **100**, project from fence column **20** so the fence can accommodate irre-

gular property shapes. Angled slats still are secured by screws through L-shaped fasteners **110** and **118**.

[0047] Slats' Positioning: FIGS. 4 through 7 show four of many possible slat arrangements. FIG. 4 has 140 mm slats **96** in which the bottom of one slat rests on the top of the adjacent slat. From a distance, the arrangement may appear solid. A similar arrangement could have 140 mm slat **100**, 50 mm slat **106** or another height slat or a mixture of them stacked above each other.

[0048] Slats **100** in FIG. 5 are about 140 mm high and are spaced apart about 140 mm apart. The 140 mm slats **106** in FIG. 6 are spaced apart farther than those in FIG. 5, and the 50 mm slats in FIG. 7 are spaced about 50 mm apart. Note the slats in FIGS. 5 and 7 and the single slat in FIG. 4 are aligned with the top and bottom of the fence columns **20** and **21**, but the top and bottom slats in FIG. 6 are spaced from the top of the fence columns. FIGS. 5 through 7 only use slats of one width. Slats of two different widths and even three or more widths can be used.

[0049] L-shaped fasteners **110** and **118** secure slats to fence columns **20** in fence system with spacing between the slats, (FIG. 2). That spacing could leave parts of slot **94**, the L-shaped fasteners **110** and **114**, and screws **116** and **118** visible and exposed. Spacers **158** (FIGS. 2, 2C) can cover those parts of the otherwise open slot. Spacers have the same shape as slot covers **142** and **144**. After one slat **100** is secured in place, spacer **158** is slid through grooves like groove **130** and **134** until it contacts the slat. Then another slat is slid through the slot and secured to wall **26**. The process continues until the top slat is secured to its position.

[0050] A window of transparent material like glass or plastic **162** may replace one or more aluminum slats (FIG. 11). The transparent material allows light to shine through, and the resident and guests can see out. The window also could be frosted or translucent to allow light to pass through it.

[0051] Glass window **162** extends between fence columns **20** and **32** into slots **90** and **170** (FIG. 11). The window may thinner than applicant's aluminum slats, and it may be taller or shorter than any slat. Clip **164** secures the window in the slot. The clip has a U-shaped portion **166**, which is the width of the glass piece. FIG. 11 shows how the window fits in the U-shaped portion. Side projections **168** and **176** project out from the U-shaped section to about the width of the slot, and distal projections **172** and **178** fit into the slot. Distal shoulders **176** and **180** project outward from wall **172** and **178** into slot grooves **182** and **184** to position clip **164**.

[0052] Gates: The fence system can include sliding or pivoting door-like gates such as pivoting gate **190** (FIG. 1). Because gates slide, roll or pivot, they don't attach to concrete, deck or soil. Gates, especially sliding and rolling ones, may be wider than the spacing of conventional fence sections like those in FIG. 1, so stronger, more rigid tops and bottoms may be desirable.

[0053] The gate may have two intersecting members: fence columns **192** (vertical) and platform **194** (horizontal) (FIGS. 12-13). Both may have the same shape as fence column **20** (FIG. 3). Using the same fence columns allows builders to keep one component in inventory for both locations, but different dimensioned fence columns could be used. Applicant uses horizontal platform **194** at the bottom of gates (FIGS. 12-13), but the horizontal platform also can be used on fence sections that are not gates.



[0054] Vertical fence column **192** extends upward from horizontal platform **194**. See FIGS. **12-15**. The horizontal platform becomes a base with its bottom aligned with and at a right angle to the vertical fence column. Instead of a base post attached to the ground like base post **10** in FIGS. **2, 2A, 2D, and 3**, applicant uses a short post **196** secured to vertical fence columns **192** and to horizontal platform **194** (FIGS. **12, 14**). Those figures show one short post, but a gate usually has at least two short posts at opposite sides of the gate. Longer gates also may have one or more intermediated, spaced-apart, short posts to improve support.

[0055] Short post **196** may be hollow and have the same outer dimensions as base post **10** (FIG. **3** and others). The short post may be coated carbon steel or stainless steel to withstand corrosion. Instead of using bolt **210** and nut **204**, the bottom end **208** of the short post may be welded shut, and the end would have a threaded opening **200** for receiving a modified bolt like bolt **202** (FIGS. **12** and **14**). A drilled hole (not numbered) extends through inside walls **214** and **216** of the horizontal platform and through the bottom wall **198** if short post **196** (FIG. **14**).

[0056] To install the short post, horizontal platform **194** is positioned with slot **210** open upward and slot **212** open downward (FIGS. **12-14**). Bolt **202** fits through the holes and engages threaded opening **200** to connect to the short post. FIG. **14** shows nut **204** secured to the end of the bolt, but a nut may be unnecessary when opening **200** and bolt **202** have common threads to be secured to each other. If a nut is used, a locking washer (not shown) between head **206** of the bolt and the horizontal platform **194** also could secure the bolt.

[0057] Until components are aligned, having the bolt remain loose may be advantageous. Smaller screws **218** (FIGS. **12, 14**) may be threaded through the slots into pre-existing, threaded openings **212** in post **196** for securing the post to its fence column. Inserting those screws also may await aligning the components.

[0058] For a wide gate, one or two additional short posts like short post **196** may mount at spaced-apart locations between the ends of the gate. These short posts support a fence column with slots extending to the sides for receiving slats with the layout of the layout used between fence columns.

[0059] Rolling gates have wheels facing downward from the bottom fence column. The wheels may travel over a metal track attached to concrete under the gate. The support for the wheel attaches to a bolt through the bottom fence column (not shown).

[0060] During assembly, slot covers like cover **142** and **144** (FIGS. **2B** and **3**) are slid into place. Then the slats like slats **100** and **106** are inserted in the slots of vertical post column **192** attached by an L-shaped fastener like fastener **110**. The first inserted slat may mount in slot **200** of vertical fence column **194**, or using fasteners, the first inserted slat may be spaced from horizontal platform **194**.

[0061] To make the gate more rigid, a similar arrangement of the horizontal and vertical fence columns may mount on the top to the gate after the slats are positioned between the vertical fence columns.

[0062] An alternate arrangement for a fence section uses an L-brace **224** (FIG. **15**) to secure vertical fence column **192** and horizontal platform **222** at the top of the fence section. The L-brace may be steel for strength and may be formed from one square, hollow crosspiece with outside

dimensions the same as or like short post **10**'s dimensions. The steel may be treated or painted for rust and corrosion prevention. The L-brace is cut to a desired length at a 45° angle, and one piece is rotated 180°. The 45°-angle ends are welded together to form the L-brace's horizontal section **226** and vertical section **224**.

[0063] The free end **226** of L-brace **220** extends into a center section of horizontal platform **228**, and the L-brace's vertical section **228** extends into the center section of vertical fence column **232**. FIG. **15** shows neither center section, but they are formed from an inside wall like wall **22** in FIG. **3**. Screws (not shown) through the slots of the fence column and platform into the L-brace secure the fence columns to the L-brace. Because the L-brace is steel, the bracket's holes may be predrilled and tapped.

[0064] To cover the region near the intersection of L-brace **224**'s horizontal section **226** and vertical section **224**, the adjacent ends **292** and **294** of the horizontal platform and vertical fence columns are cut at a 45° angle so they intersect to form a right angle. Self-drilling screws may extend through the fence columns into predrilled holds in L-brace **224** after ends **292** and **294** are brought together tightly.

[0065] For swing gates, a fence column like fence column **20** mounts vertically on a base post like post **10**, attaches to another stationary fence column, or attaches to a concrete, block, stucco, wood, or brick wall. One or more hinges (not shown) attach the fence column that pivots with the gate to the stationary object.

[0066] FIGS. **8, 9, and 10** show components for the side of the swinging gate that swings open and close. Lockset housing **232** replaces fence column **20** from other figures. It has two elongated sides **234** and **236**. The right end (FIGS. **8** and **9**) forms a slot **238** that receives slats **240**. The slats are stacked like they are in other sections of the fence. These slats may be held in place by L-shaped fasteners (not shown) like fastener **110** and **118** in FIG. **2B**. Self-drilling screws (not shown) also may extend through walls **240** and **242** near the right end of the lockset housing **232** into the slats. See FIG. **9**.

[0067] Lockset housing **232** receives a lockset, which includes doorknobs **246** and **248** (FIG. **9**). The doorknobs extend through drilled holes (not shown) through elongated walls **232** and **234**. The drilled holes are typically about 3.5 ft. (≈1.1 m) above the ground. The doorknobs attach to other lockset structure based on instructions often included with purchased locksets.

[0068] Parts of the lockset extend from the doorknobs to a conventional mechanism **250** inside lockset housing **232**. Rotating a doorknob causes the mechanism to move latch assembly **252** to the right (FIG. **9**) to withdraw latch bolt **254** (FIG. **10**). Releasing the doorknobs in the other direction allows the bolt to move outward as FIG. **10** shows. Because the lockset is conventional, and the installer can choose among different locksets, the installer uses components for the chosen lockset. The lockset latch may include a deadlatch plunger to block that may prevent an intruder from using a screwdriver, credit card or other flat device to push the latch inward to open the gate.

[0069] Instead of or in addition to latch **254**, the gate may have a deadbolt lock (not shown) as part of the lockset. Applicant also could use a lock for sliding gates such as a sliding gate lock from Locinox USA. The lockset may use electronics for opening the latch through fingerprint recog-



dition, a numeric combination, or remote through wi-fi or other wireless network protocols.

[0070] Post 260 for the gate (FIGS. 9 and 10) may be extruded aluminum. Its back wall 262 may attach to a building wall to another fence column like fence column 20. It also may be attached to the ground through a post. Slot 268 in post 260 has gaps 264 at the inside corners the receive screws for attaching a cover. Post 260's front wall 266 receives slot cover 270 in grooves 272 and 274 (FIG. 9), and opening 268 in the slot cover receives latch 254 when the gate is pivoted closed. Front wall 266 includes extension 276 that extends a short distance along elongated wall 236 (FIG. 9). The extension blocks intruders from reaching latch 252 to force the gate open. Extension 276 should face outward from the property, and the gate opens in toward the opposite direction. See FIG. 10.

[0071] Narrow walls 242 and 244 at the right side of elongated walls 234 and 236 (FIG. 9) have grooves 280 and 282 for receiving slot covers (not shown). Those covers may be sized to align with the outside surface of elongated walls 234 and 236. Other grooves 284 and 286 also may receive spacers like spacers 158 (FIG. 2) between slats.

[0072] Grooves like groove 130 (FIG. 2) inside the three fence column's slots like slot 90 run the length of the fence column. Slot covers may slide into those grooves to create a near-uniform flat face for the side with the slot cover.

[0073] Having no visible slots makes the fence column smooth and aesthetically pleasing. When slats are installed in a slot, the slot cover hide the slats' open ends and any rough edges made while cutting the aluminum.

[0074] Locating the slots along the fence columns' three sides enables the fence columns to be used for straight fence sections and for corners turning "left" or "right" along a fence row. The final side of the fence column, base wall 42, has no groove because that side needs no panels installed to that side.

[0075] The description is illustrative, not limiting and is for example only. Although this application shows and describes examples, those having ordinary skill in the art will find it apparent they can make changes, modifications or alterations. Examples may involve specific combinations of method acts or system elements, but those acts and those elements may be combined in other ways to achieve the same objectives. Acts, elements and features discussed only with one embodiment are not intended to be excluded from a similar role in other embodiments.

[0076] "Plurality" means two or more. A "set" of items may include one or more of such items. The terms "comprising," "including," "carrying," "having," "containing," "involving," and similar words in the written description or the claims are open-ended, i.e., each means, "including but not limited to." Only the transitional phrases "consisting of" and "consisting essentially of" are closed or semi-closed transitional phrases regarding claims. The ordinal terms like "first," "second," "third," etc., in the claims don't by themselves connote any priority, precedence, or order of one claim element over another or the temporal order in which acts of a method are performed. Instead, they merely are labels to distinguish one claim element having a certain name from another element having a same name (but for the ordinal term's use). Alternatives like "or" include one or any combination of the listed items. "Applicant" means the assignee of this application at the time of filing.

1. A fence system comprising:

a first upright fence column, formed of a single piece, the first upright fence column having an inside wall sized to receive a base post and an outside wall around the inside wall;

the first upright fence column including at least one slot extending the length of the first upright fence column from the inside wall toward the outside wall, the at least one slot having grooves along either side, each groove adapted to receive distal shoulders of an extension

the extension having a length and a height extending from the inside wall through the length of the slot;

the extension formed having distal shoulders to engage the grooves and a strike extending the length of the at least one slot, the strike for engaging a second upright fence column forming a portion of a gate when the gate is closed; and

the second upright fence column, formed of a single piece, the second upright fence column having a hollow cross-section, incorporating a second slot to receive a slat, and incorporating at least two elongated sidewalls of sufficient width to accommodate a conventional lockset.

2. The fence system of claim 1, wherein the inside wall of the first upright fence column is rectangular.

3. The fence system of claim 1, wherein each at least one slot has two outside surfaces extending from the inside wall, each outside surface having a groove.

4. The fence system of claim 3 further comprising a slot cover having an outer wall and a pair of clip walls, each clip wall having a distal shoulder aligned with the groove in each outside surface.

5. The fence system of claim 1 further comprising an L-shaped brace having a first end received in the inside wall of the first upright fence column and a second end received in the inside wall of a horizontal platform.

6. The fence system of claim 5, wherein the outside wall of the first upright fence column and the outside wall of the horizontal platform each has a 45° end intersecting each other.

7. The fence system of claim 1 wherein:

the first upright fence column includes an inside wall formed from first, second, third and fourth inside walls sized to receive a base post, the first inside wall being connected to the second and fourth inside walls, the third inside wall being connected to the second and fourth inside walls, the second inside wall being connected to the first and third inside walls, each inside wall having a length, the first and third inside walls being parallel to each other, and the second and fourth inside walls being parallel to each other;

a first outer member spaced outside the first upright fence column and having first and second ends and an outside wall parallel to and longer than the length of one wall of the inside walls, the outside wall of the first outer member having a first end wall perpendicular to and attached to the first end of the outside wall and a second end wall perpendicular to and attached to the second first end of the outside wall, a third end wall extending between the first end wall and a length of the second inside wall, a fourth end wall extending between the second first end wall and a length of the fourth inside wall;

a first pillar having a first pillar wall attached to a length of the second inside wall and a second pillar wall attached to a length of the first inside wall, a second pillar having a third pillar wall attached to a length of the fourth inside



wall and a fourth pillar wall attached to a length of the first inside wall; and  
the first pillar being positioned to create a first slot between the first pillar and the outer member, the first and second pillars being positioned to create a second slot between the pillars,  
and the second pillar being positioned to create a third slot between the second pillar and the outer member.

**8.** The fence system of claim **7** wherein at least one slot of the first, second or third slots comprises one of the inside walls and two side walls perpendicular with the inside wall.

**9.** The fence system of claim **8** further comprising a groove in each side wall.

**10.** (canceled)

**11.** (canceled)

**12.** (canceled)

**13.** (canceled)

**14.** (canceled)

**15.** (canceled)

**16.** (canceled)

**17.** (canceled)

**18.** (canceled)

**19.** (canceled)

**20.** (canceled)

**21.** The gate for a fence system of claim **27**, wherein the sufficient width includes a lockset width, parallel to the length of the at least one slot, the lockset width sufficient to mount the conventional lockset.

**22.** The gate for a fence system of claim **21** further comprising:

a lockset housing mounted on the lockset width of the first upright fence column;

the second upright fence column having a portion of the second outside wall adjacent to the upright fence column and opposite the at least one slot;

the second upright fence column modifiable to include a latch opening positioned to receive a latch mounted in and extending out of the lockset housing toward the latch opening.

**23.** (canceled)

**24.** (canceled)

**25.** The fence system of claim **27** wherein the conventional lockset is of a width greater than 2 inches.

**26.** The gate for a fence system of claim **27** wherein each of the first and second upright fence columns are formed of aluminum.

**27.** A gate for a fence system comprising:

a first upright fence column, formed of a single piece, the first upright fence column having a first inside wall sized to receive a base post and a first outside wall around the first inside wall;

the first upright fence column including a first at least one slot extending the length of the first upright fence column from the first inside wall toward the first outside wall, the first at least one slot adapted to receive a slat having a

length and a height extending from the first inside wall through the first at least one slot to the first outside wall; a slot-received strike comprising a single-piece extending the length of the first at least one slot, having two distal shoulders adapted to engage corresponding grooves within the first at least one slot, and including a strike against which a second upright fence column may sit when the gate is closed;

the slot-received strike engaging the first at least one slot such that the two distal shoulders engage the corresponding grooves;

the second upright fence column, formed of a single piece, the second upright fence column being substantially hollow in cross-section, having a second at least one slot adapted to receive a slat and a second outside wall around the second at least one slot, the second outside wall having two elongated sides of sufficient width to accommodate a conventional lockset.

**28.** The gate for a fence system of claim **27** further comprising:

the conventional lockset installed between the two elongated sides of the second upright fence column.

**29.** The gate for a fence system of claim **27** wherein the conventional lockset is installed passing through both of the two elongated sides of the second upright fence column with a tongue for the conventional lockset extends outward toward the slot-received strike.

**30.** The gate for a fence system of claim **29** wherein the slot-received strike is modified to incorporate a latch to receive a tongue of the conventional lockset.

**31.** A gate for a fence system comprising:

a gate fence post, the gate fence post being substantially hollow in cross-section, having a gate slot on a first side, adapted to accept one or more of a slat extending outward from the gate slot, a spacer filling the slot such that the face of the first side is flush when the gate slot is filled with the spacer filling;

the gate fence post having a flat side, opposite the first side, adapted to easily be modified to receive a tongue of a conventional lockset;

the gate fence post having two parallel lockset faces, perpendicular to the first side and the flat side, adapted to easily be modified to accept the conventional lockset;

a gate strike fence post, the gate strike fence post having a strike slot, the strike slot having two grooves along opposite sides, each of the two grooves adapted to receive one of two distal shoulders on a slot-received strike; and

the slot-received strike including the two distal shoulders and running the length of the gate strike fence post engaged within the strike slot and including a projection extending on one side of the gate strike fence post such that the projection with the gate fence post engages the gate fence post to disable movement of the gate fence post past the projection.

\* \* \* \* \*